



GARAGE DOORS GENERAL CATALOGUE

CAME  **GO**

CAME  GO

7	Mission		
8	New products 2020		
10	Residential door models		
11	Industrial door models		
	RESIDENTIAL DOORS		
14	Piano		
18	Dogato		
22	Rigato		
26	Millerighe		
28	Cassettato		
32	Scenario		
36	Panoramic		
	Residential doors: technical information		
42	Installation site conditions		
44	GR100NR		
48	GR150NF		
52	GR180NF		
56	GR250NF		
60	GR330NF		
64	GR630HF		
68	Type of fixing		
71	Overall threshold sizes		
	Special solutions		
74	GO-SLIDE		
76	READY TO GO Kit		
77	GO-LEVEL Kit		
	New in residential sectional doors		
80	CAME GO PREMIUM		
88	CAME GO ENJOY!		
92	GO-XFRAME		
98	GO-LIGHT*		
100	GO-SIDEFIX		
	INDUSTRIAL DOORS		
104	Piano		
106	Dogato		
108	Rigato		
110	Millerighe		
112	Scenario		
114	Panoramic		
	Industrial doors: technical information		
118	Installation site conditions		
120	GI300NF		
124	GI350NF		
128	GI450NF		
132	GI520NF		
136	GI990HF		
140	GIH+600VF		
144	Type of fixing		
145	Overall threshold sizes		
	Special solutions		
148	Iron		
	Accessories for sectional doors		
152	GO-LEVEL		
156	GO-STEP		
166	GO-VISION		
174	GO-MOTION PLUS kits		
176	GO-MOTION NEXT Kit		
177	GO-MOTION PLUS Accessories		
180	New GO-MOTION X PLUS Kits		
181	GO-MOTION X Kits		
183	Accessories for Industrial Operator		
	In-depth Information		
186	SCENARIO Profile		
190	PANORAMIC Profile		
	Additional accessories for sectional, residential and industrial doors		
196	Kit GO-WIRELESS PLUS		
197	No-Touch safety kit		
198	Other operators		
201	Gobló		
203	Porthole		
204	Casing for square tubing		
204	Square tubing		
205	Jambs and casing		
206	Headers		
207	Hangers		
207	Ceiling fittings		
208	Colour		
208	Generic variations		
208	Locks		
209	Ventilation grilles		
209	Animal flaps		
210	GO-EXIT		
	Colour range		
214	CAME GO standard colour range		
215	Additional colour range chart		
215	Additional similar RAL colour table		

KEY TO ICONS




MANUAL
OPERATION



AUTOMATED
OPERATION



MINIMUM
ARCHITRAVE
REQUIRED

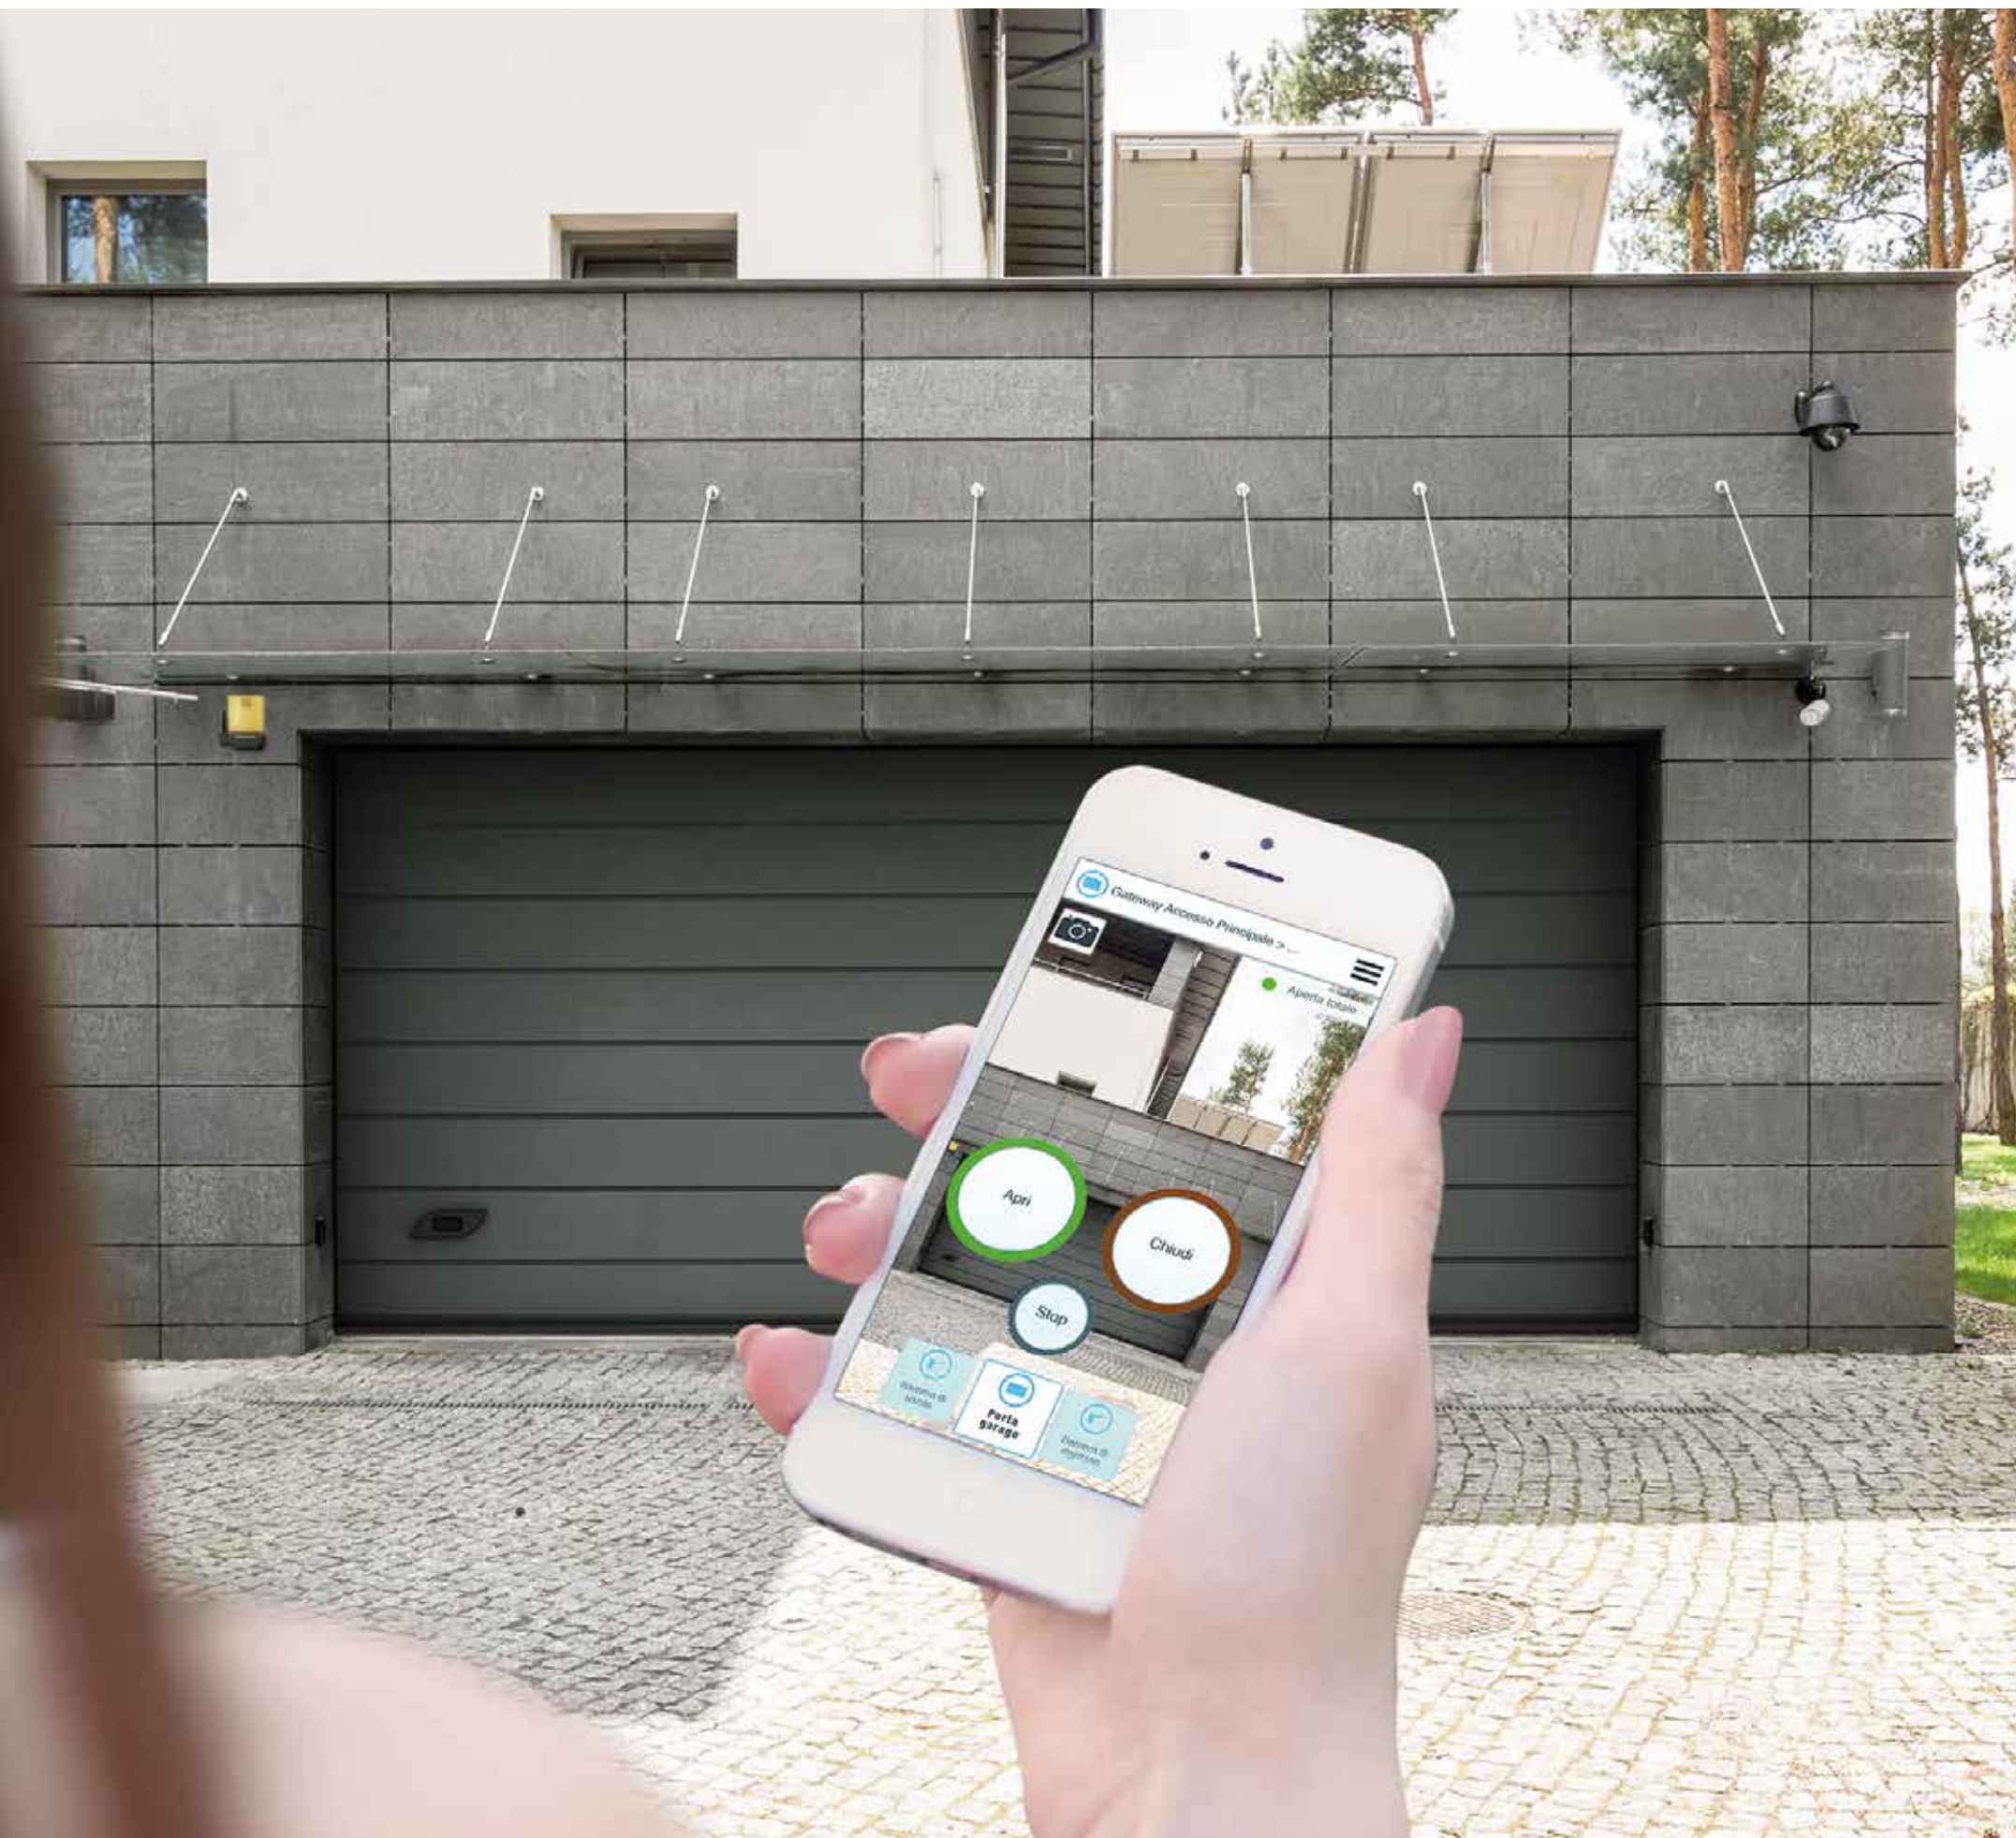

**CAME GO IS ABOUT A CHALLENGE:
creating quality sectional doors.
Attractive, smart and 100% Italian.**

CAME GO is born from twenty years of experience in the accessories for industrial doors and gates sector. It is one of the main producers of residential and industrial sectional doors completely designed and manufactured in Italy. Today, CAME GO is a made-in-Italy success story. Thanks to its ability to combine attention to detail, design and a drive towards technological innovation, it is able to offer high-value, cutting edge products.

The company's selling point is its complete control over production. CAME GO designs, builds and installs in Italy, at its hi-tech production facility which houses modern, robotised systems. These are used to automate and control every step of production to achieve excellent levels of quality, design and safety.

Each and every component of the accessories and the sectional, residential and industrial doors has been thought up and designed by CAME GO in response to specific requirements.

Everything, from the choice of materials to the mechanics, has been designed to guarantee a solid, long-lasting, resistant and safe product.

The company philosophy is to offer functional products that are also design features that add value to the surrounding architecture.

Available in a wide range of colours and finishes that are customisable and versatile, CAME GO sectional doors perfectly combine technology and design, making the very best of the closing systems used for private homes as well as large industrial premises.

It's in this direction that CAME GO continues to operate, looking to the future: bringing together the most advanced technologies with that aesthetic sense, typical of Made-in-Italy, to offer sectional doors that go beyond the concept of quality to meet that of value.


CAME GO PREMIUM

An addictive aesthetics in every detail and a refined design are part of the special technologic equipment studied to manage your garage door wherever you are. Amazing!
Find out about CAME GO **PREMIUM** on page 80



CAME GO ENJOY!

The full kit to remote control your automation GO-MOTION PLUS and to check it safely directly from your personal devices via the CAME AUTOMATION app.
Find out about CAME GO **ENJOY!** on page 88

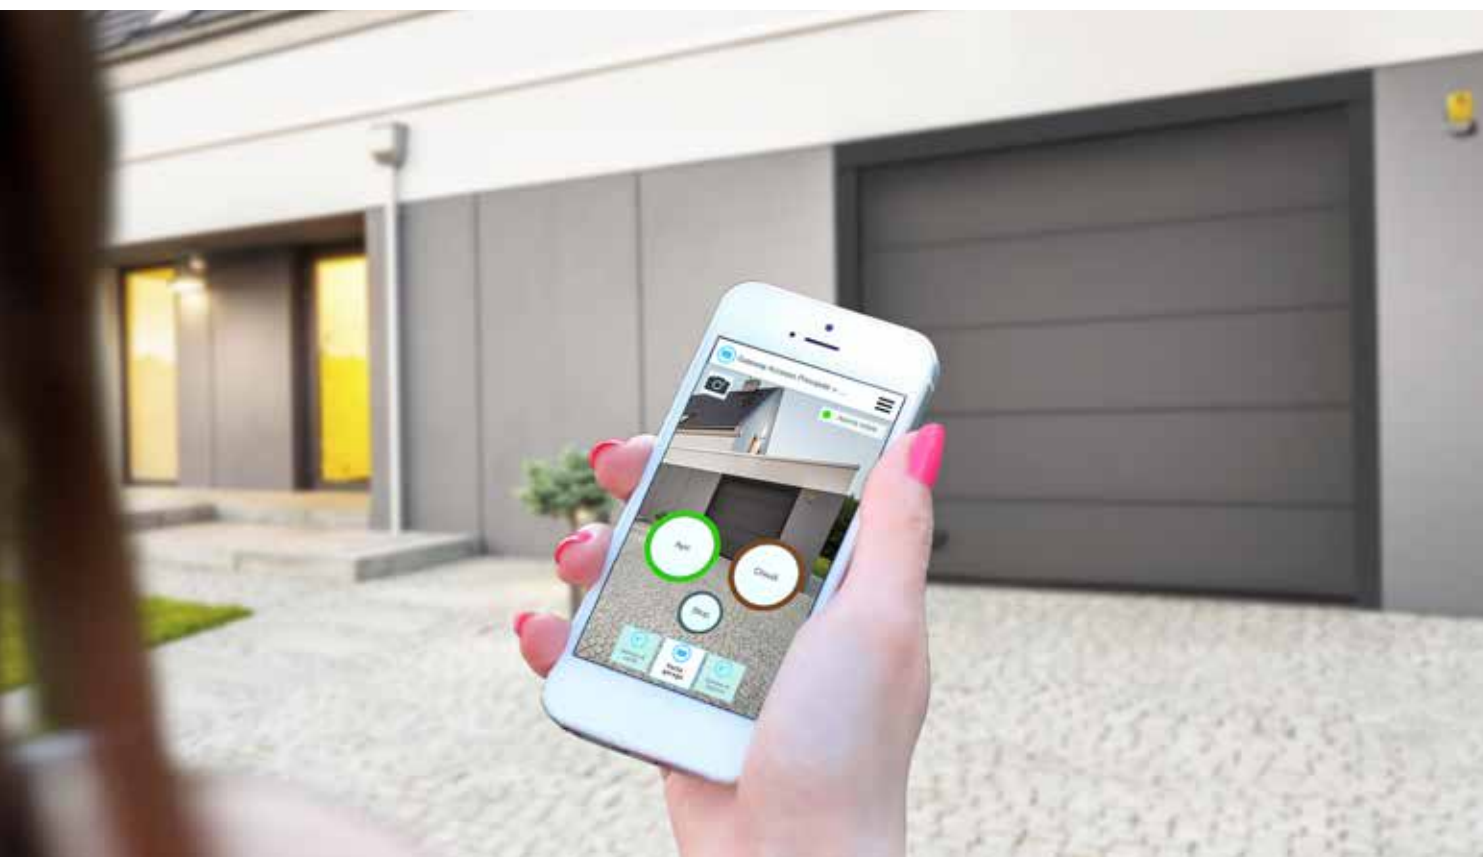

NEW ANTHRACITE FINISH



Discover the two new sandblasted finishes **SANDGRAIN TOUCH** and **POLYGRAIN PMD**.
Consult the panel table on page 216



SIMIL RAL 7016
POLYGRAIN PMD

SIMIL RAL 7016
SANDGRAIN TOUCH



NEW SATIN FILLING



Discover the **new satin finish** for the GO-VISION solution.
Discover GO-VISION on page 166



PIANO DESIGN



DOGATO DESIGN



RIGATO DESIGN



MILLERIGHE DESIGN



CASSETTATO DESIGN *



SCENARIO DESIGN



PANORAMIC DESIGN



* on request

PIANO DESIGN



DOGATO DESIGN



RIGATO DESIGN



SCENARIO DESIGN



MILLERIGHE DESIGN



PANORAMIC DESIGN





RESIDENTIAL SECTIONAL DOORS

PIANO

Minimalist forms that blend seamlessly into any living environment, especially suited to modern spaces.



FINISHES

Smooth

Embossed wood

PVC smooth film-coated

Smooth pre-laquered

WINDOWS

Goblò

Go-Vision

Panoramic

SIMILAR RAL COLOURS

9016 Poly *	1013	7035	7040	9002	9006	6005	3003	6009	5010
8014	7016 Poly PMD *	7016 Sandgrain	Golden Oak PVC	Dark Oak PVC	V-Golden Prev.	V-Dark Prev.	Other Colours page 215		

ARCHITRAVES AND SLIDING MECHANISMS

GR100NR

GR150NF

GR180NF

GR250NF

GR330NF

GR630HF

PEDESTRIAN DOOR

Also available with pedestrian door
GO-LEVEL / GO-STEP

*** Note:** The long-lasting surface coating on the POLYGRAIN panels (Poly similar RAL 9016 and Poly similar RAL 7016) has a shimmering finish, which changes depending on the angle you look at it from and the light shining on it. The colour is not uniform as on other types of panel. Therefore, any subtle or more significant shades and tones should not be considered a defect on the panel, rather an integral part of its finish.

Note: CAME GO uses the SIMILAR RAL colour range. The SIMILAR RAL colour tones in the catalogue and other CAME GO documents and promotional material are approximate and should be considered as an indication of the colour shade. The finished product colour may differ in tone, shade and brightness with respect to the SIMILAR RAL sample.



Smooth Piano
SIMILAR RAL 7016 POLY PMD



Smooth Piano
SIMILAR RAL 7040




Smooth Piano
SIMILAR RAL 1013



DOGATO

Elegant, wide, horizontal staves to add aesthetic value to both traditional and modern architecture.



FINISHES


Smooth


Embossed wood


PVC smooth film-coated

Smooth pre-laquered

WINDOWS

Goblò

Go-Vision

Panoramic

ARCHITRAVES AND SLIDING MECHANISMS

GR100NR

GR150NF

GR180NF

GR250NF

GR330NF

GR630HF

SIMILAR RAL COLOURS

9016 Poly *

1013

7035

7040

9002

9006

6005

3003

6009

5010

8014

7016 Poly PMD *

7016 Sandgrain

Golden Oak PVC

Dark Oak PVC

V-Golden Prev.

V-Dark Prev.

Other Colours

Other Colours page 215

PEDESTRIAN DOOR

Also available with pedestrian door
GO-LEVEL / GO-STEP

* **Note:** The long-lasting surface coating on the POLYGRAIN panels (Poly similar RAL 9016 and Poly similar RAL 7016) has a shimmering finish, which changes depending on the angle you look at it from and the light shining on it. The colour is not uniform as on other types of panel. Therefore, any subtle or more significant shades and tones should not be considered a defect on the panel, rather an integral part of its finish.

Note: CAME GO uses the SIMILAR RAL colour range. The SIMILAR RAL colour tones in the catalogue and other CAME GO documents and promotional material are approximate and should be considered as an indication of the colour shade. The finished product colour may differ in tone, shade and brightness with respect to the SIMILAR RAL sample.




Dogato
V-GOLDEN

Dogato
SIMILAR RAL 7016 POLY PMD

RIGATO

Practical, original and perfect in every context, it is highly customisable thanks to a vast range of colours and finishes.




FINISHES


Smooth



Embossed wood


Embossed stucco

WINDOWS


Goblò


Go-Vision


Panoramic

SIMILAR RAL COLOURS


9016 Poly *


1013


7035


7040


9002


9006


6005


3003


6009


5010


8014


Other Colours
page 215

ARCHITRAVES AND SLIDING MECHANISMS


GR100NR


GR150NF


GR180NF


GR250NF


GR330NF


GR630HF

PEDESTRIAN DOOR

Also available with pedestrian door
GO-LEVEL / GO-STEP

*** Note:** The long-lasting surface coating on the POLYGRAIN panels (Poly similar RAL 9016 and Poly similar RAL 7016) has a shimmering finish, which changes depending on the angle you look at it from and the light shining on it. The colour is not uniform as on other types of panel. Therefore, any subtle or more significant shades and tones should not be considered a defect on the panel, rather an integral part of its finish.

Note: CAME GO uses the SIMILAR RAL colour range. The SIMILAR RAL colour tones in the catalogue and other CAME GO documents and promotional material are approximate and should be considered as an indication of the colour shade. The finished product colour may differ in tone, shade and brightness with respect to the SIMILAR RAL sample.

Rigato
SIMILAR RAL 9016



Embossed wood
Rigato in RAL
sample shade



MILLERIGHE

A balance between tradition and innovation, to create a line that is classic yet fresh and original, and can be adapted to suit any building.



FINISHES



Millerighe


WINDOWS



Goblo



Go-Vision



Panoramic

SIMILAR RAL COLOURS



9006

ARCHITRAVES AND SLIDING MECHANISMS



GR100NR



GR150NF



GR180NF



GR250NF



GR330NF



GR630HF

PEDESTRIAN DOOR

Also available with pedestrian door
GO-LEVEL / GO-STEP

CASSETTATO


The perfect balance between tradition and innovation, to create a line that is classic but fresh, and evokes old-style elegance.



FINISHES

- 
Embossed wood
- 
PVC wood film-coated

WINDOWS

- 
Goblò

ARCHITRAVES AND SLIDING MECHANISMS

- 
GR100NR
- 
GR150NF
- 
GR180NF
- 
GR250NF
- 
GR330NF
- 
GR630HF

SIMILAR RAL COLOURS

- 
9016
- 
1013
- 
7035
- 
7040
- 
9002
- 
9006
- 
6005
- 
3003
- 
6009
- 
5010
- 
8014
- 
Golden Oak PVC
- 
Dark Oak PVC
- 
Other Colours page 215

Note: CAME GO uses the SIMILAR RAL colour range. The SIMILAR RAL colour tones in the catalogue and other CAME GO documents and promotional material are approximate and should be considered as an indication of the colour shade. The finished product colour may differ in tone, shade and brightness with respect to the SIMILAR RAL sample.

Nota: PANNELLI DI COMPENSAZIONE: per eventuali pannelli di compensazione del CASSETTATO sono disponibili a listino i pannelli PIANO goffrato legno.

CASSETTATO

Embossed Cassettato
SIMILAR RAL 1013 wood




Film-coated embossed
Cassettato in Dark Oak
wood





SCENARIO

Maximum brightness with this sophisticated design, carefully executed to the smallest detail, ideal in elegant and sophisticated settings.



GLASS AND MESH FILLERS

 Clear

 Satin

 Opal

 Mesh micro-perforated

 Expanded metal mesh

 Wire mesh

 Alu + MDF Panels

ARCHITRAVES AND SLIDING MECHANISMS

 100
GR100NR

 150
GR150NF

 180
GR180NF

 250
GR250NF

 330
GR330NF

 630
GR630HF

COLOUR / FINISHES OF ALUMINIUM PROFILES

 Aluminium Anodised

 White 9016

 Black 9005

 1013

 7035

 7040

 9002

 9006

 6005

 3003

 6009

 5010

 8014

 7016

 Golden Oak

 Dark Oak


 Anthracite

 Other Colours Available

PEDESTRIAN DOOR

Also available with pedestrian door
GO-LEVEL / GO-STEP

Note: CAME GO uses the SIMILAR RAL colour range. The SIMILAR RAL colour tones in the catalogue and other CAME GO documents and promotional material are approximate and should be considered as an indication of the colour shade. The finished product colour may differ in tone, shade and brightness with respect to the SIMILAR RAL sample.

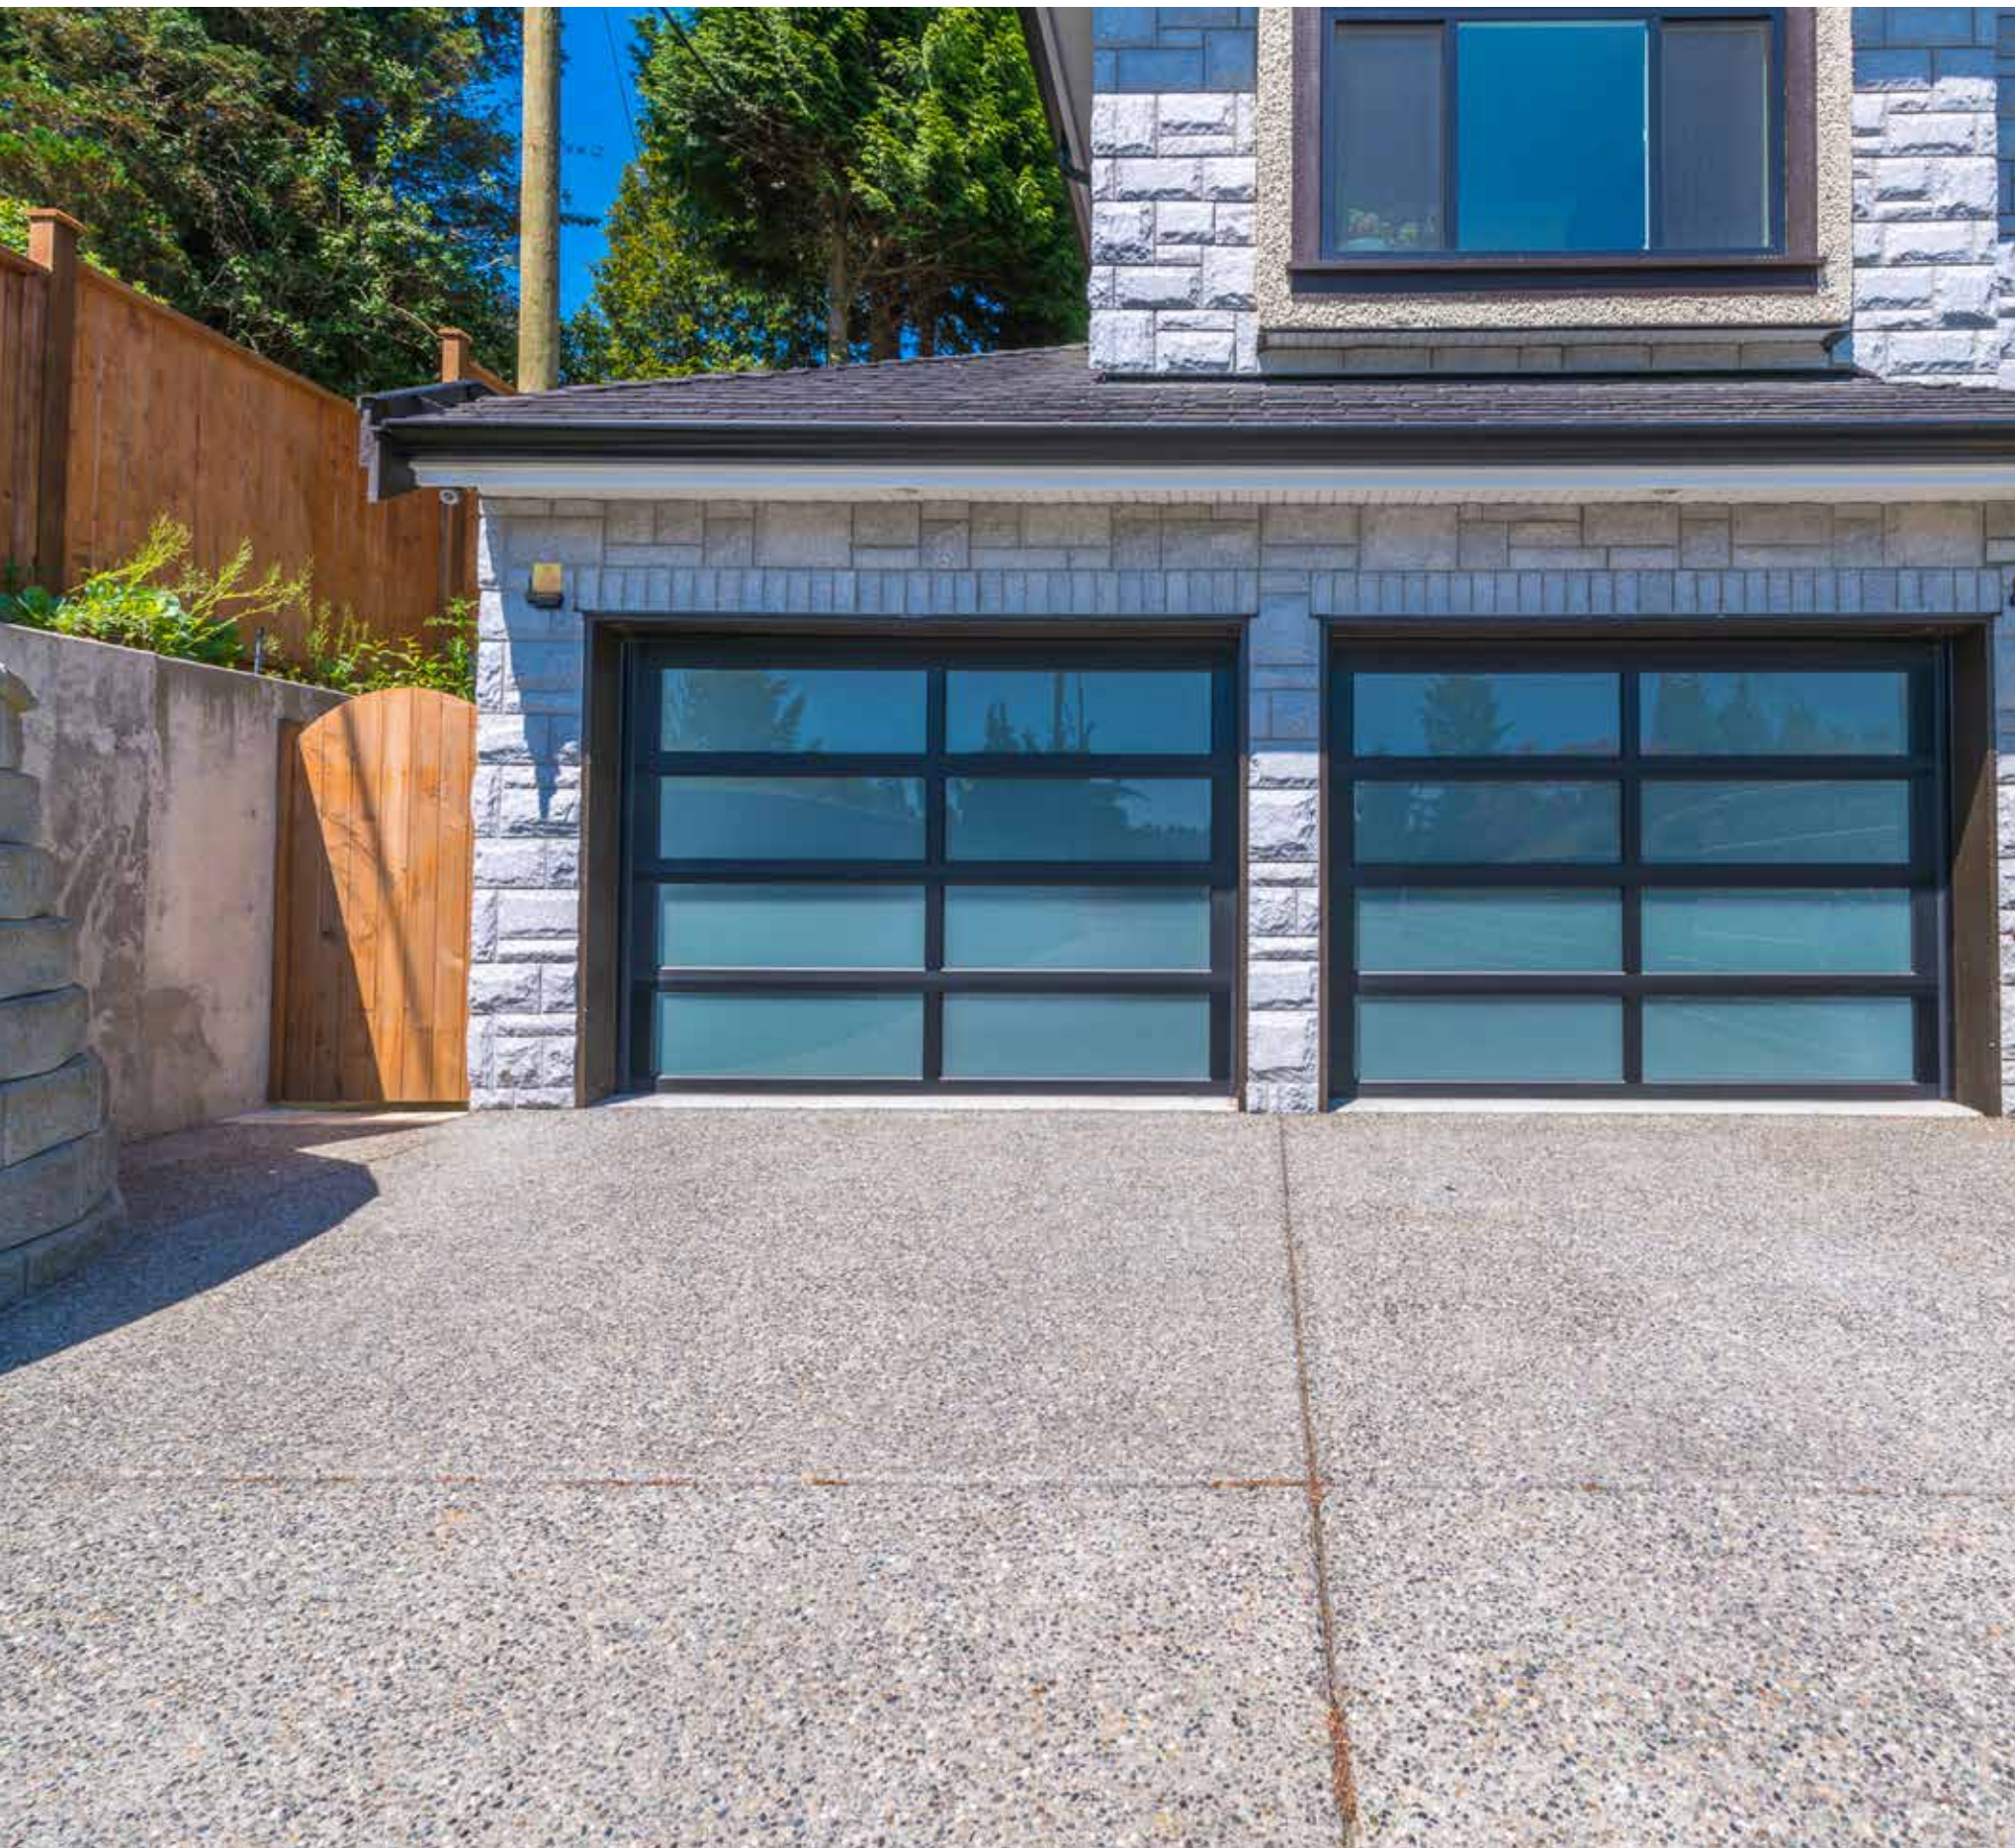

Scenario - aluminium profiles
in sample SIMILAR RAL with
filler mesh




Scenario - anodised
aluminium profiles with opal
insulating glass



Scenario - aluminium profiles
SIMILAR RAL 9005 with opal
insulating glass

PANORAMIC

Clean lines and maximum brightness for a chic, modern and original look, perfect for state-of-the-art spaces.



GLASS AND MESH FILLER

Clear	Satin	Opal	Mesh micro-perforated	Expanded metal mesh	Wire mesh

ARCHITRAVES AND SLIDING MECHANISMS

GR100NR	GR150NF	GR180NF	GR250NF	GR330NF	GR630HF

COLOUR / FINISHES OF ALUMINIUM PROFILES

Aluminium Anodised	White 9016	Black 9005	1013	7035	7040	9002	9006	6005	3003	6009
5010	8014	7016	Golden Oak	Dark Oak	Anthracite	Other Colours Available				

Note: CAME GO uses the SIMILAR RAL colour range. The SIMILAR RAL colour tones in the catalogue and other CAME GO documents and promotional material are approximate and should be considered as an indication of the colour shade. The finished product colour may differ in tone, shade and brightness with respect to the SIMILAR RAL sample.














Panoramic - Aluminium profiles with
satin-finished double glazing

Panoramic - Black Aluminium edges
SIMILAR RAL 9005 with opal insulating glass



RESIDENTIAL DOORS: TECHNICAL INFORMATION

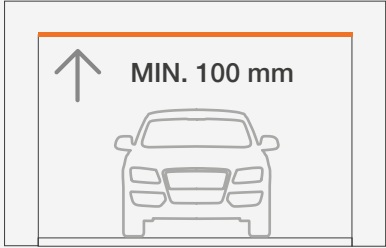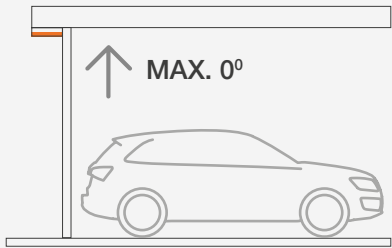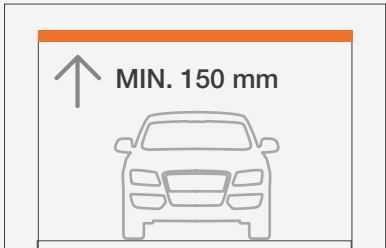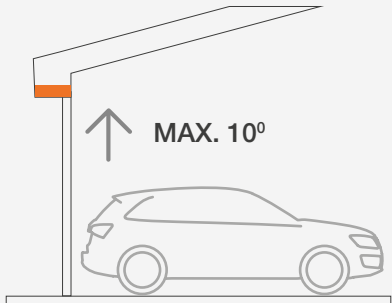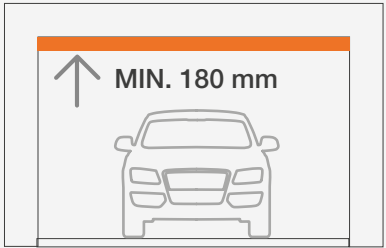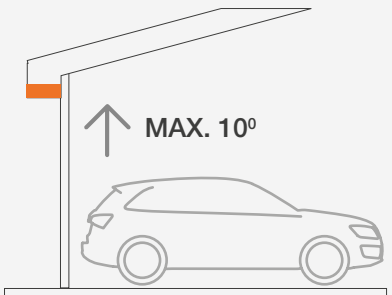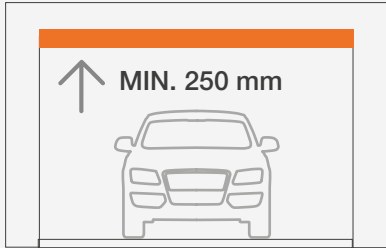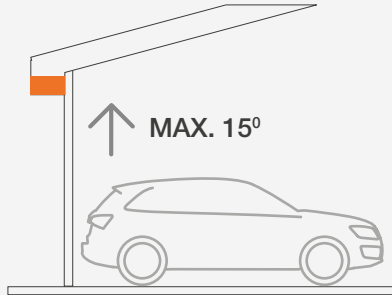AVAILABLE ARCHITRAVE	ROOF INCLINE	MODEL
		GR100NR Lowered sliding mechanism double horizontal track with springs at end. Architrave 100 mm - Roof incline 0°
		GR150NF Lowered sliding mechanism single horizontal track with front springs. Architrave 150 mm - Roof incline max. 10°
		GR180NF Lowered sliding mechanism double horizontal track with front springs. Architrave 180 mm - Roof incline max. 10°
		GR250NF Lowered sliding mechanism double horizontal track with increased diameter front springs. Architrave 250 mm - Roof incline max. 15°

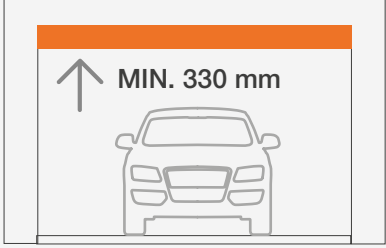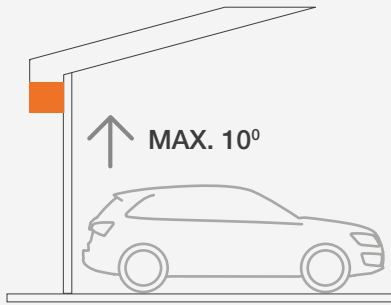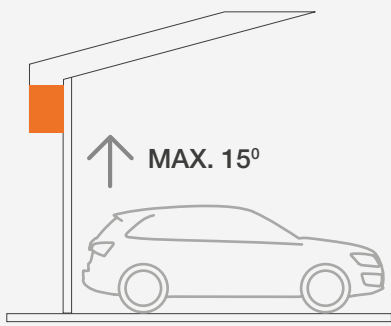AVAILABLE ARCHITRAVE	ROOF INCLINE	MODEL
		GR330NF Horizontal single track sliding mechanism with front springs. Architrave 330 mm - Roof incline max. 10°
		GR630HF Partly vertical single track sliding mechanism with front springs. Architrave 630 mm - Roof incline max. 15°



GR 100 NR - the only sliding mechanism with a rear spring group.

Perfect where there is a 100 mm architrave and the ideal solution for restructuring works. The particular arrangement of the spring group actually reduces the space required in the architrave to a minimum.

Identical performance to all the other sliding mechanisms and extremely practical thanks to its automated operation.

FOCUS



A Reduced dimensions of architrave



B Parachute cables as standard



C Double track sliding mechanism



D Rear spring position

OPTIONAL MOTOR KIT

GO MOTION PLUS kit, the smart automation kits for your CAME GO door that come complete with: motor, rail, brackets/screws and remotes. Providing them with the system CAME GO ENJOY! can be easily managed by your smartphone and/or tablet.

Find out about GO-MOTION PLUS kits, CAME GO ENJOY! and the wide range of accessories on page 174



The model GR100NR requires automation to work

* Patented



GO-XFRAME / GO-LIGHT*

GO-XFRAME The innovative coplanar system in aluminium for fitting where little or no space is available (jamb - architrave). Allows the additional installation of GO-LIGHT*, the most powerful built-in LED perimeter system you've ever seen in a sectional door.

Find out about GO-XFRAME page 92 Find out about GO-LIGHT* page 98



CASING TO COVER SPRINGS


Covering profile in pre-painted, press-bent sheet metal standard RAL 9016 for the moving mechanics of the spring group. Design and functionality.



GO-SIDEX SIDE ATTACHMENT

GO-SIDEX The new system that allows the sliding system to be attached to the side. Perfect in sites with load-bearing side walls, but with front jambs unsuitable for anchoring. Less work on walls, fewer installation costs.

Find out about GO-SIDEX SIDE ATTACHMENT page 100

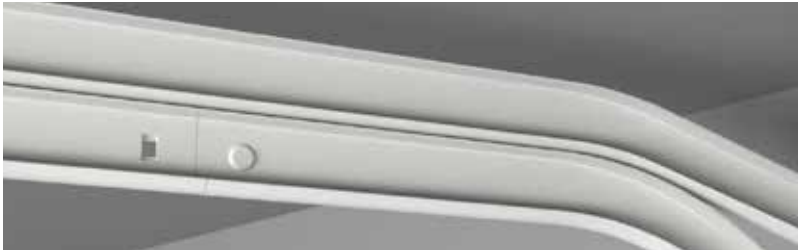

PAINTWORK


A simple touch of personality! Match the tracks and the hinges to the colour of the inner form with RAL 9016 powder-coating.




SIZES AVAILABLE



AVAILABLE ARCHITRAVE

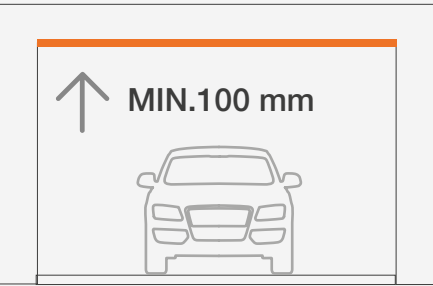

ROOF INCLINE

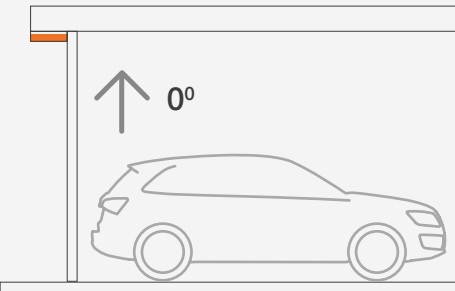

Note: Non-standard measurements available subject to technical feasibility.

MECHANICS

- Pre-assembled rear torsion spring assembly for available architraves, minimum 100mm.
- Sized for 15,000 cycles (1 cycle = 1 opening + 1 closing motion).
- Sliding mechanism in hot-dip galvanised steel (maximum oxidation protection).
- Ball-bearing sliding components with side shielding for maximum protection against dust and water.

FORM

- Pinch-resistant insulation panels, 40 mm thick, in Sendzimir* hot-dip galvanised steel with high-density polyurethane foam core that is self-extinguishing and CFC-free.
- Watertight and windproof EPDM seals.


SAFETY EQUIPMENT

- Safety device against springs break.
- Safety device against cables break.


OPERATOR

- GO-MOTION automation kit required for operation.

VIEW FROM THE SIDE

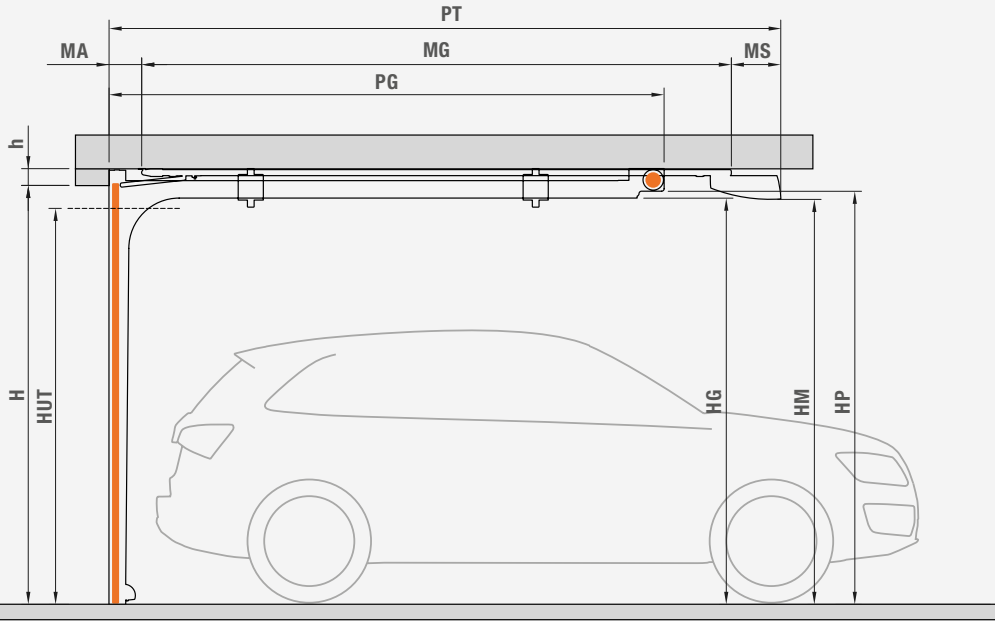

VIEW FROM ABOVE

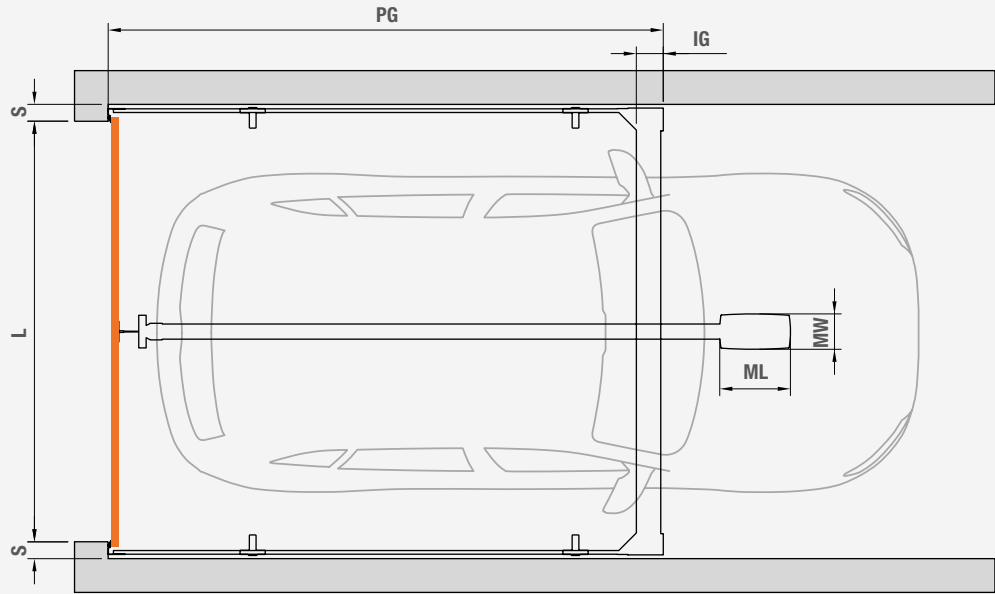

ABBREVIATION	MEANING
H	HEIGHT OF OPENING
h	100 MINIMUM ARCHITRAVE
PG	H + 815 SLIDING MECHANISM OVERALL SIZE
HUT *	H - 137 USEFUL PASSING HEIGHT (with manual manoeuvre)
PT	MA + MG + MS TOTAL DEPTH WITH MOTOR
MA	195 DRIVE TRACK ATTACHMENT**
MS	295 MAX DRIVE PROJECTION*
HG	H - 76 TRACK HEIGHT FROM GROUND
HM	MIN. H - 83 MOTOR HEIGHT FROM GROUND
HP	H - 35 END CROSS PIECE HEIGHT FROM GROUND

ABBREVIATION	MEANING
IG	160 SPRING GROUP OVERALL SIZE
L	WIDTH OF OPENING
S	MIN. 100 LATERAL SPACE
ML	MAX 450 MOTOR LENGTH OVERALL SIZE
MW	MAX 215 MOTOR WIDTH OVERALL SIZE
MG	TRACK LENGTH FOR DRIVE MOTOR
	L= 3020 L= 3520 L= 4020
	RACE CAPACITY OF THE GUIDE
	MAXIMUM RAISABLE HEIGHT
	H= 2400 H= 2900 H= 3400

* **Note:** data valid where there is no GO-LEVEL / GO-STEP pedestrian door



GR 150 NF - the special sliding mechanism that allows ventilation of premises.

With overall size reduced to only 150 mm of architrave, the operator lets the last top panel of the form tilt to allow ventilation of internal areas while keeping the door closed properly against the lower threshold. The ideal solution for fulfilling certain building regulations, or simply for convenience when doing hobbies.

FOCUS



Ⓐ Tilting panel



Ⓑ Parachute cables as standard



Ⓒ Single track sliding mechanism

OPTIONAL MOTOR KIT

GO MOTION PLUS kit, the smart automation kits for your CAME GO door that come complete with: motor, rail, brackets/screws and remotes. Providing them with the system CAME GO ENJOY! can be easily managed by your smartphone and/or tablet. Find out about GO-MOTION PLUS kits, CAME GO ENJOY! and the wide range of accessories on page 174



The model GR150NF requires automation to work

* Patented



GO-XFRAME / GO-LIGHT*

GO-XFRAME The innovative coplanar system in aluminium for fitting where little or no space is available (jamb - architrave). Allows the additional installation of GO-LIGHT*, the most powerful built-in LED perimeter system you've ever seen in a sectional door. Find out about GO-XFRAME page 92 Find out about GO-LIGHT* page 98



CASING TO COVER SPRINGS

Covering profile in pre-painted, press-bent sheet metal standard RAL 9016 for the moving mechanics of the spring group. Design and functionality.





GO-SIDEX SIDE ATTACHMENT

GO-SIDEX The new system that allows the sliding system to be attached to the side. Perfect in sites with load-bearing side walls, but with front jambs unsuitable for anchoring. Less work on walls, fewer installation costs. Find out about GO-SIDEX SIDE ATTACHMENT page 100



PAINTWORK

A simple touch of personality! Match the tracks and the hinges to the colour of the inner form with RAL 9016 powder-coating.

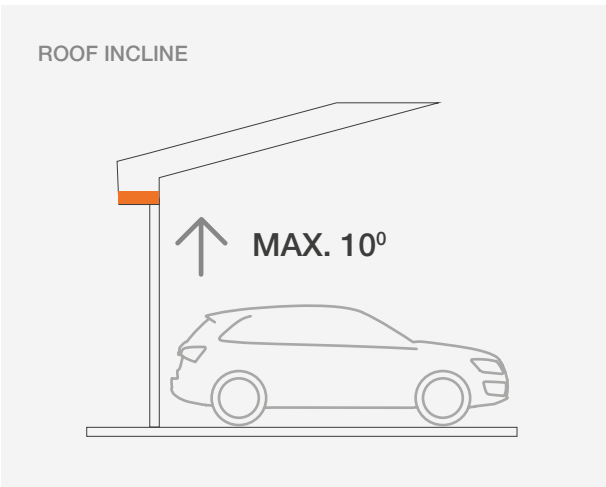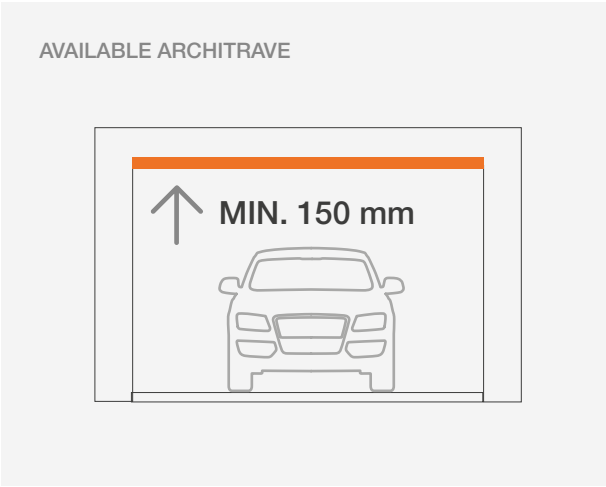

Note: Non-standard measurements available subject to technical feasibility.

MECHANICS

- Pre-assembled torsion spring assembly for available architraves, minimum 150mm.
- Sized for 15,000 cycles (1 cycle = 1 opening + 1 closing motion).
- Sliding mechanism in hot-dip galvanised steel with galvanised edges (maximum oxidation protection).
- Ball-bearing sliding components with side shielding for maximum protection against dust and water.

FORM

- Pinch-resistant insulation panels, 40 mm thick, in Sendzimir* hot-dip galvanised steel with high-density polyurethane foam core that is self-extinguishing and CFC-free.
- Watertight and windproof EPDM seals.

SAFETY EQUIPMENT



- Safety device against springs break.
- Safety device against cables break.

PARTIAL OPENING SYSTEM FOR VENTILATION OF PREMISES

- This particular sliding mechanism allows you to keep the flap door on the last panel of the sectional door closed, allowing you to ventilate the room.

OPERATOR

- GO-MOTION automation kit required for operation.

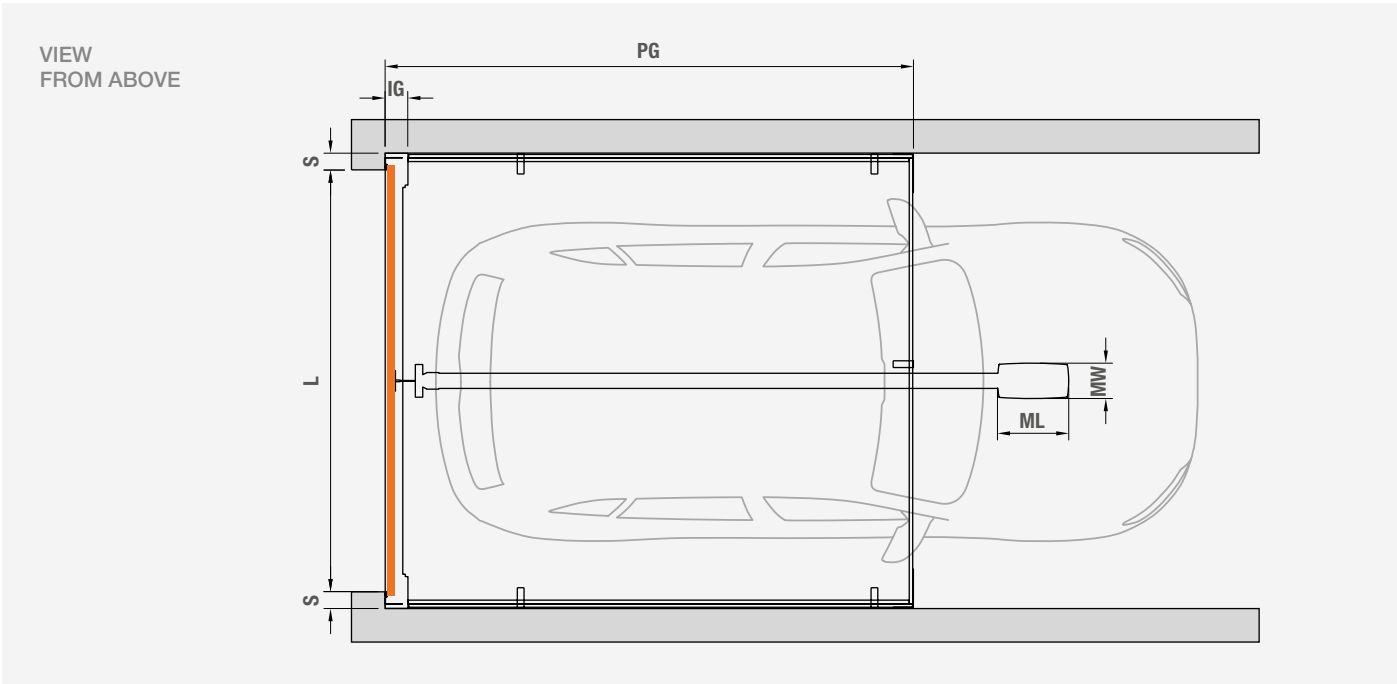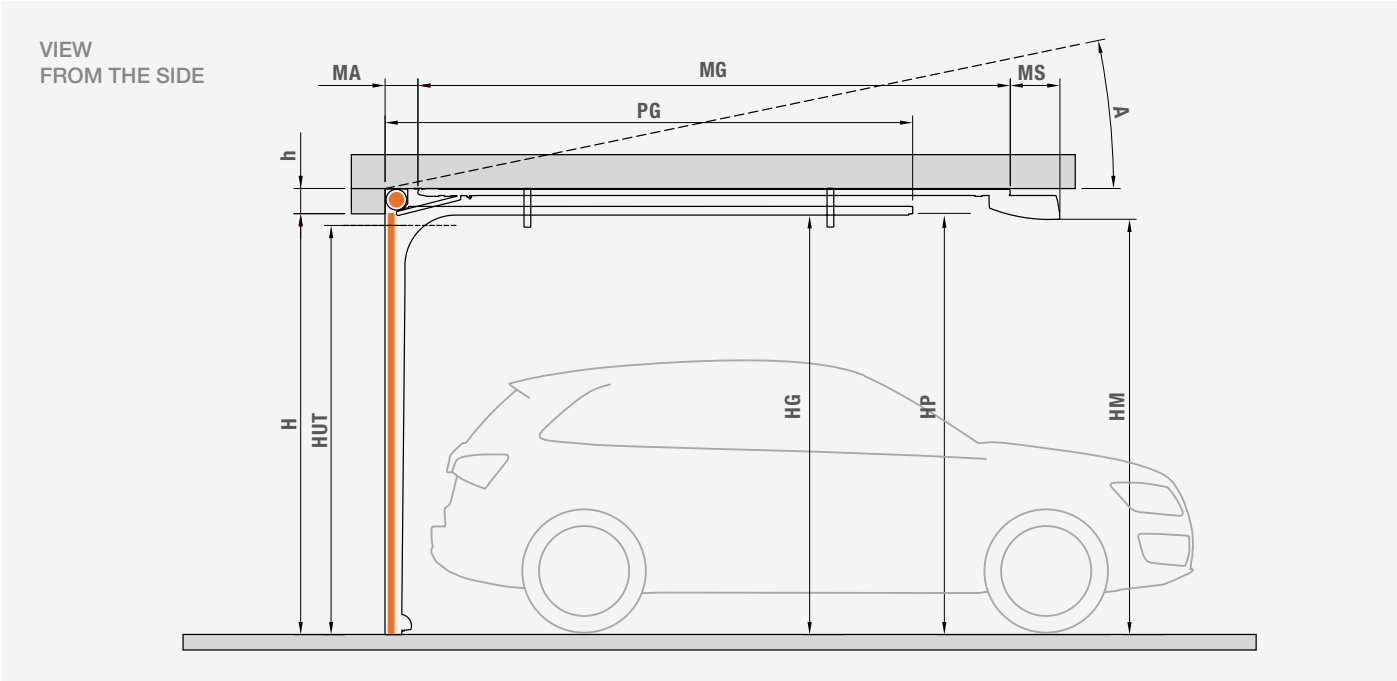

ABBREVIATION	MEANING
H	HEIGHT OF OPENING
h	150 MINIMUM ARCHITRAVE
PG	H + 634 SLIDING MECHANISM OVERALL SIZE
HUT *	H - 70 USEFUL PASSING HEIGHT
PT	MA + MG + MS TOTAL DEPTH WITH MOTOR
MA	195 DRIVE TRACK ATTACHMENT**
MS	295 MAX DRIVE PROJECTION*
HG	H - 9 TRACK HEIGHT FROM GROUND
HM	MIN. H - 33 MOTOR HEIGHT FROM GROUND
HP	H END CROSS PIECE HEIGHT FROM GROUND

ABBREVIATION	MEANING
A	10° MAXIMUM INCLINE OF RAILS (*)
IG	135 SPRING GROUP OVERALL SIZE
L	WIDTH OF OPENING
S	MIN. 100 LATERAL SPACE
ML	MAX 450 MOTOR LENGTH OVERALL SIZE
MW	MAX 215 MOTOR WIDTH OVERALL SIZE
MG	TRACK LENGTH FOR DRIVE MOTOR
	L= 3020 L= 3520 L= 4020
	RACE CAPACITY OF THE GUIDE
	MAXIMUM RAISABLE HEIGHT
	H= 2400 H= 2900 H= 3400

* **Note:** data valid where there is no GO-LEVEL / GO-STEP pedestrian door

Note: (*) The maximum incline that can be achieved can go up to 15° with prior check by the CAME GO technical office



GR 180 NF - the most versatile sliding mechanism in the whole range.

With only 180 mm overall space in the architrave and the configuration of its components, it can be used in both manual and automated modes.

This versatility makes it the solution most requested by our clients who can configure and personalise their own door with a huge range of accessories.

FOCUS



A Architrave dimension 180 mm



B Parachute cables as standard



C Double track sliding mechanism

OPTIONAL MOTOR KIT

GO MOTION PLUS kit, the smart automation kits for your CAME GO door that come complete with: motor, rail, brackets/screws and remotes. Providing them with the system CAME GO ENJOY! can be easily managed by your smartphone and/or tablet.

Find out about GO-MOTION PLUS kits, CAME GO ENJOY! and the wide range of accessories on page 174



* Patented



GO-XFRAME / GO-LIGHT*

GO-XFRAME The innovative coplanar system in aluminium for fitting where little or no space is available (jamb - architrave). Allows the additional installation of GO-LIGHT*, the most powerful built-in LED perimeter system you've ever seen in a sectional door.

Find out about GO-XFRAME page 92 Find out about GO-LIGHT* page 98



CASING TO COVER SPRINGS

Covering profile in pre-painted, press-bent sheet metal standard RAL 9016 for the moving mechanics of the spring group. Design and functionality.



GO-SIDEX SIDE ATTACHMENT

GO-SIDEX The new system that allows the sliding system to be attached to the side. Perfect in sites with load-bearing side walls, but with front jambs unsuitable for anchoring. Less work on walls, fewer installation costs.

Find out about GO-SIDEX SIDE ATTACHMENT page 100



PAINTWORK


A simple touch of personality! Match the tracks and the hinges to the colour of the inner form with RAL 9016 powder-coating.




SIZES AVAILABLE



AVAILABLE ARCHITRAVE

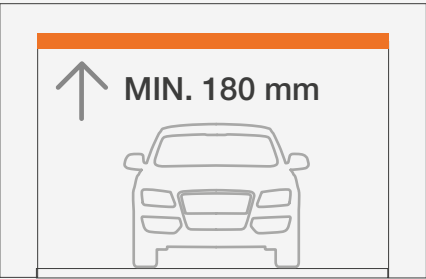

ROOF INCLINE

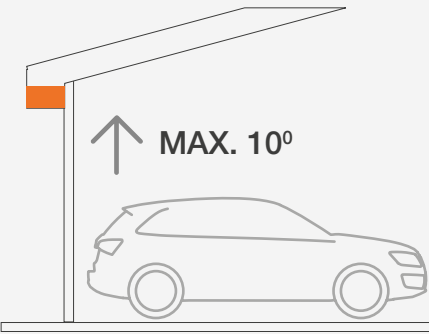

Note: Non-standard measurements available subject to technical feasibility.

MECHANICS

- Pre-assembled torsion spring assembly for available architraves, minimum 180mm.
- Sized for 15,000 cycles (1 cycle = 1 opening + 1 closing motion).
- Sliding mechanism in hot-dip galvanised steel (maximum oxidation protection).
- Ball-bearing sliding components with side shielding for maximum protection against dust and water.


FORM

- Pinch-resistant insulation panels, 40 mm thick, in Sendzimir* hot-dip galvanised steel with high-density polyurethane foam core that is self-extinguishing and CFC-free.
- Watertight and windproof EPDM seals.


SAFETY EQUIPMENT

- Safety device against springs break.
- Safety device against cables break.

VIEW FROM THE SIDE

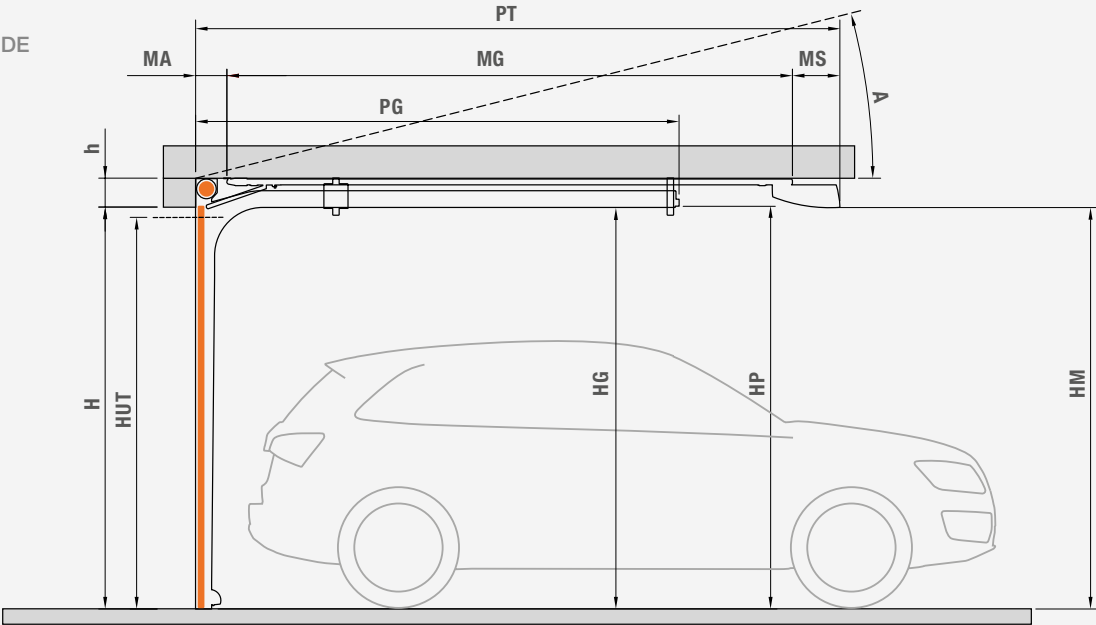

VIEW FROM ABOVE

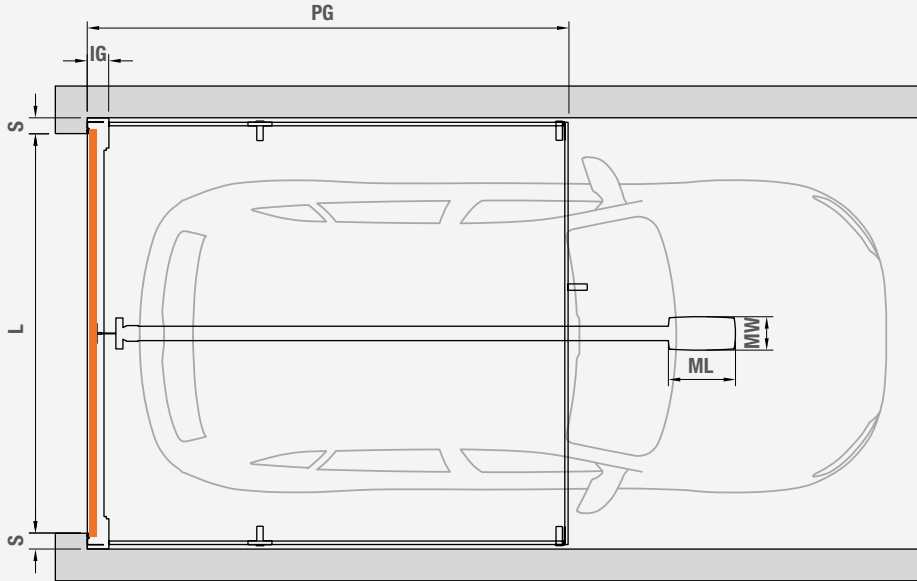


ABBREVIATION	MEANING
H	HEIGHT OF OPENING
h	180 MINIMUM ARCHITRAVE
PG	H + 510 SLIDING MECHANISM OVERALL SIZE
HUT *	H - 64 USEFUL PASSING HEIGHT
PT	MA + MG + MS TOTAL DEPTH WITH MOTOR
MA	195 DRIVE TRACK ATTACHMENT**
MS	295 MAX DRIVE PROJECTION*
HG	H - 3 TRACK HEIGHT FROM GROUND
HM	MIN. H - 3 MOTOR HEIGHT FROM GROUND
HP	H+5 END CROSS PIECE HEIGHT FROM GROUND

ABBREVIATION	MEANING
A	10° MAXIMUM INCLINE OF RAILS (*)
IG	135 SPRING GROUP OVERALL SIZE
L	WIDTH OF OPENING
S	MIN. 100 LATERAL SPACE
ML	MAX 450 MOTOR LENGTH OVERALL SIZE
MW	MAX 215 MOTOR WIDTH OVERALL SIZE
MG	TRACK LENGTH FOR DRIVE MOTOR
	L= 3020 L= 3520 L= 4020
	RACE CAPACITY OF THE GUIDE
	MAXIMUM RAISABLE HEIGHT
	H= 2400 H= 2900 H= 3400

* **Note:** data valid where there is no GO-LEVEL / GO-STEP pedestrian door

Note: (*) The maximum incline that can be achieved can go up to 15° with prior check by the CAME GO technical office

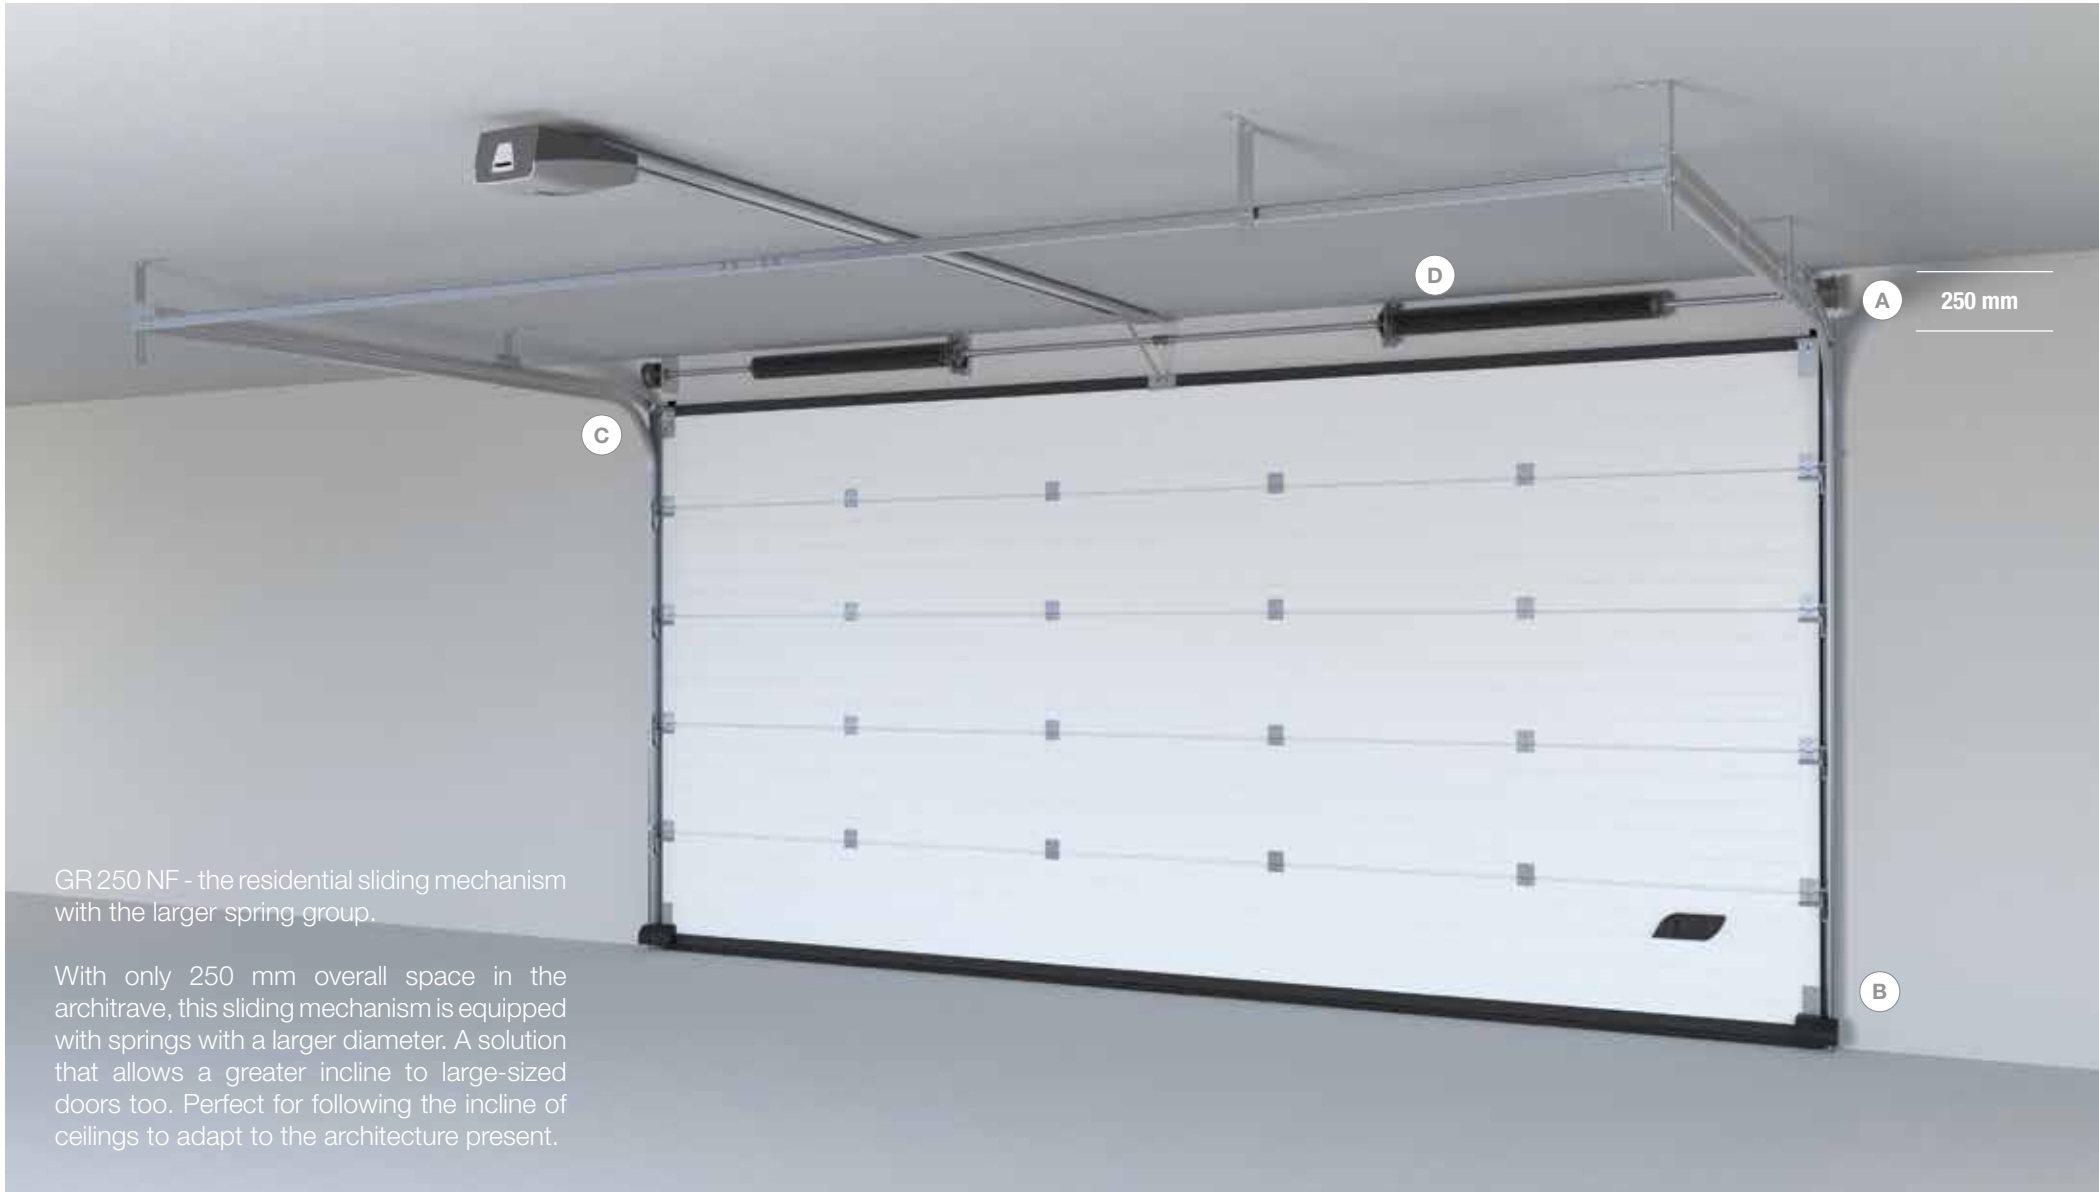


GR 250 NF - the residential sliding mechanism with the larger spring group.

With only 250 mm overall space in the architrave, this sliding mechanism is equipped with springs with a larger diameter. A solution that allows a greater incline to large-sized doors too. Perfect for following the incline of ceilings to adapt to the architecture present.



GO-SIDEFIX SIDE ATTACHMENT

GO-SIDEFIX The new system that allows the sliding system to be attached to the side. Perfect in sites with load-bearing side walls, but with front jambs unsuitable for anchoring. Less work on walls, fewer installation costs. Find out about GO-SIDEFIX SIDE ATTACHMENT page 100

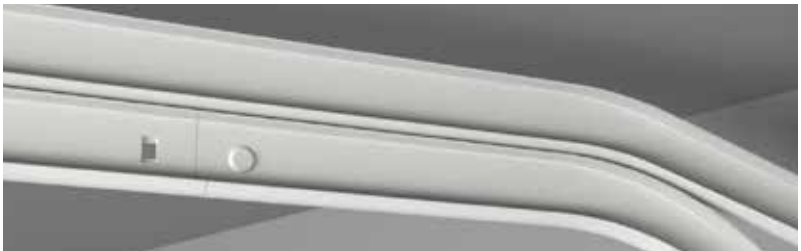

PAINTWORK

A simple touch of personality! Match the tracks and the hinges to the colour of the inner form with RAL 9016 powder-coating.

FOCUS



A Architrave dimension 250 mm



B Parachute cables as standard



C Double track sliding mechanism



D Spring group with larger diameter

OPTIONAL MOTOR KIT

GO MOTION PLUS kit, the smart automation kits for your CAME GO door that come complete with: motor, rail, brackets/screws and remotes. Providing them with the system CAME GO ENJOY! can be easily managed by your smartphone and/or tablet. Find out about GO-MOTION PLUS kits, CAME GO ENJOY! and the wide range of accessories on page 174







SIZES AVAILABLE



AVAILABLE ARCHITRAVE

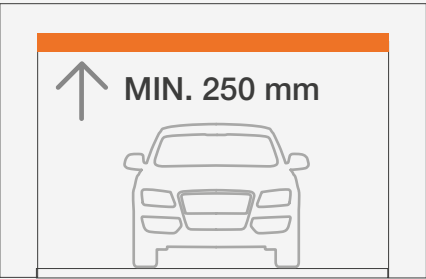

ROOF INCLINE

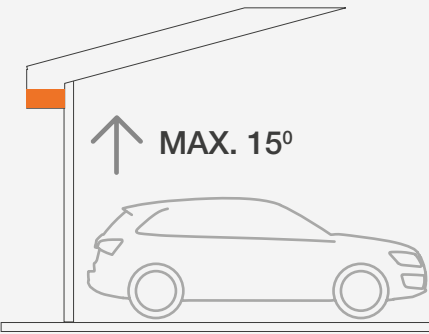

Note: Non-standard measurements available subject to technical feasibility.

MECHANICS

- Pre-assembled torsion spring assembly for available architraves, minimum 250mm.
- Sized for 15,000 cycles (1 cycle = 1 opening + 1 closing motion).
- Sliding mechanism in hot-dip galvanised steel with galvanised edges (maximum oxidation protection)
- Ball-bearing sliding components with side shielding for maximum protection against dust and water.


FORM

- Pinch-resistant insulation panels, 40 mm thick, in Sendzimir* hot-dip galvanised steel with high-density polyurethane foam core that is self-extinguishing and CFC-free.
- Watertight and windproof EPDM seals.


SAFETY EQUIPMENT

- Safety device against springs break.
- Safety device against cables break.
- Safety drive device (on horizontal incline)

VIEW FROM THE SIDE

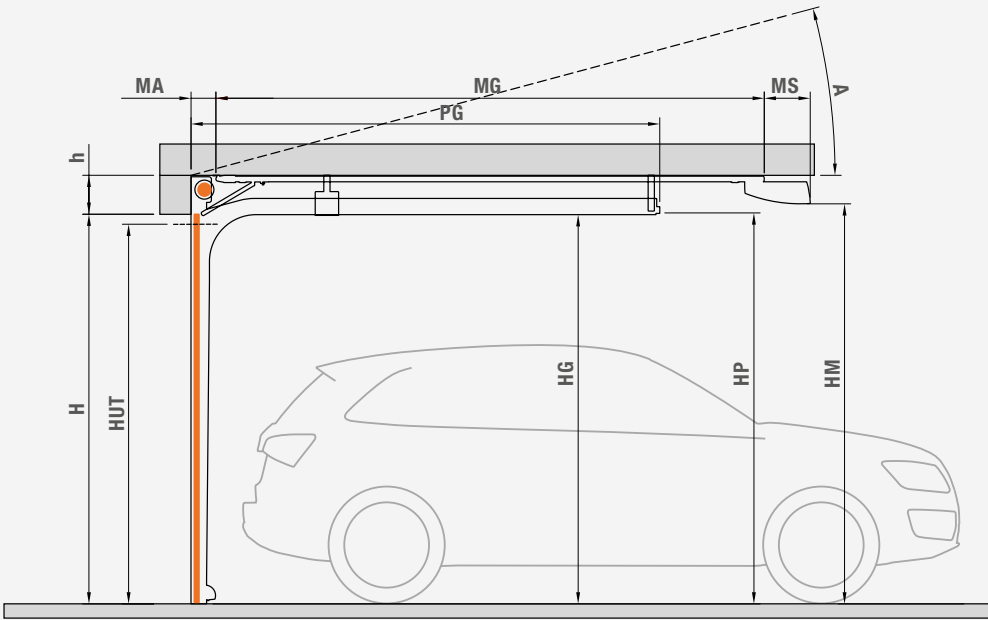


VIEW FROM ABOVE

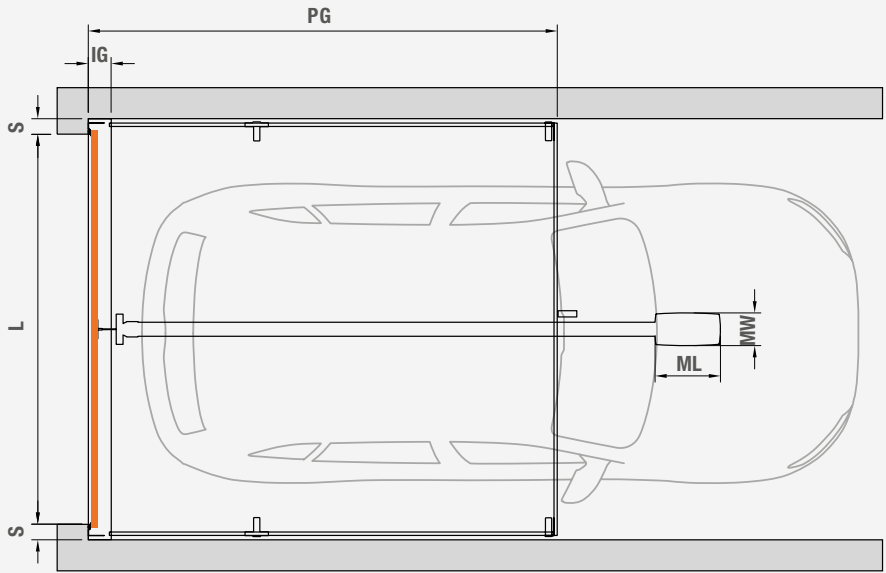

ABBREVIATION	MEANING
H	HEIGHT OF OPENING
h	250 MINIMUM ARCHITRAVE
PG	H + 510 SLIDING MECHANISM OVERALL SIZE
HUT *	H - 64 USEFUL PASSING HEIGHT
PT	MA + MG + MS TOTAL DEPTH WITH MOTOR
MA	160 DRIVE TRACK ATTACHMENT**
MS	295 MAX DRIVE PROJECTION*
HG	H - 3 TRACK HEIGHT FROM GROUND
HM	MIN. H - 67 MOTOR HEIGHT FROM GROUND
HP	H - 67 END CROSS PIECE HEIGHT FROM GROUND

ABBREVIATION	MEANING
A	15° MAXIMUM INCLINE OF RAILS
IG	147 SPRING GROUP OVERALL SIZE
L	WIDTH OF OPENING
S	MIN. 100 LATERAL SPACE
ML	MAX 450 MOTOR LENGTH OVERALL SIZE
MW	MAX 215 MOTOR WIDTH OVERALL SIZE
MG	TRACK LENGTH FOR DRIVE MOTOR
	L= 3020 L= 3520 L= 4020
	RACE CAPACITY OF THE GUIDE
	MAXIMUM RAISABLE HEIGHT
	H= 2400 H= 2900 H= 3400

* **Note:** data valid where there is no GO-LEVEL / GO-STEP pedestrian door

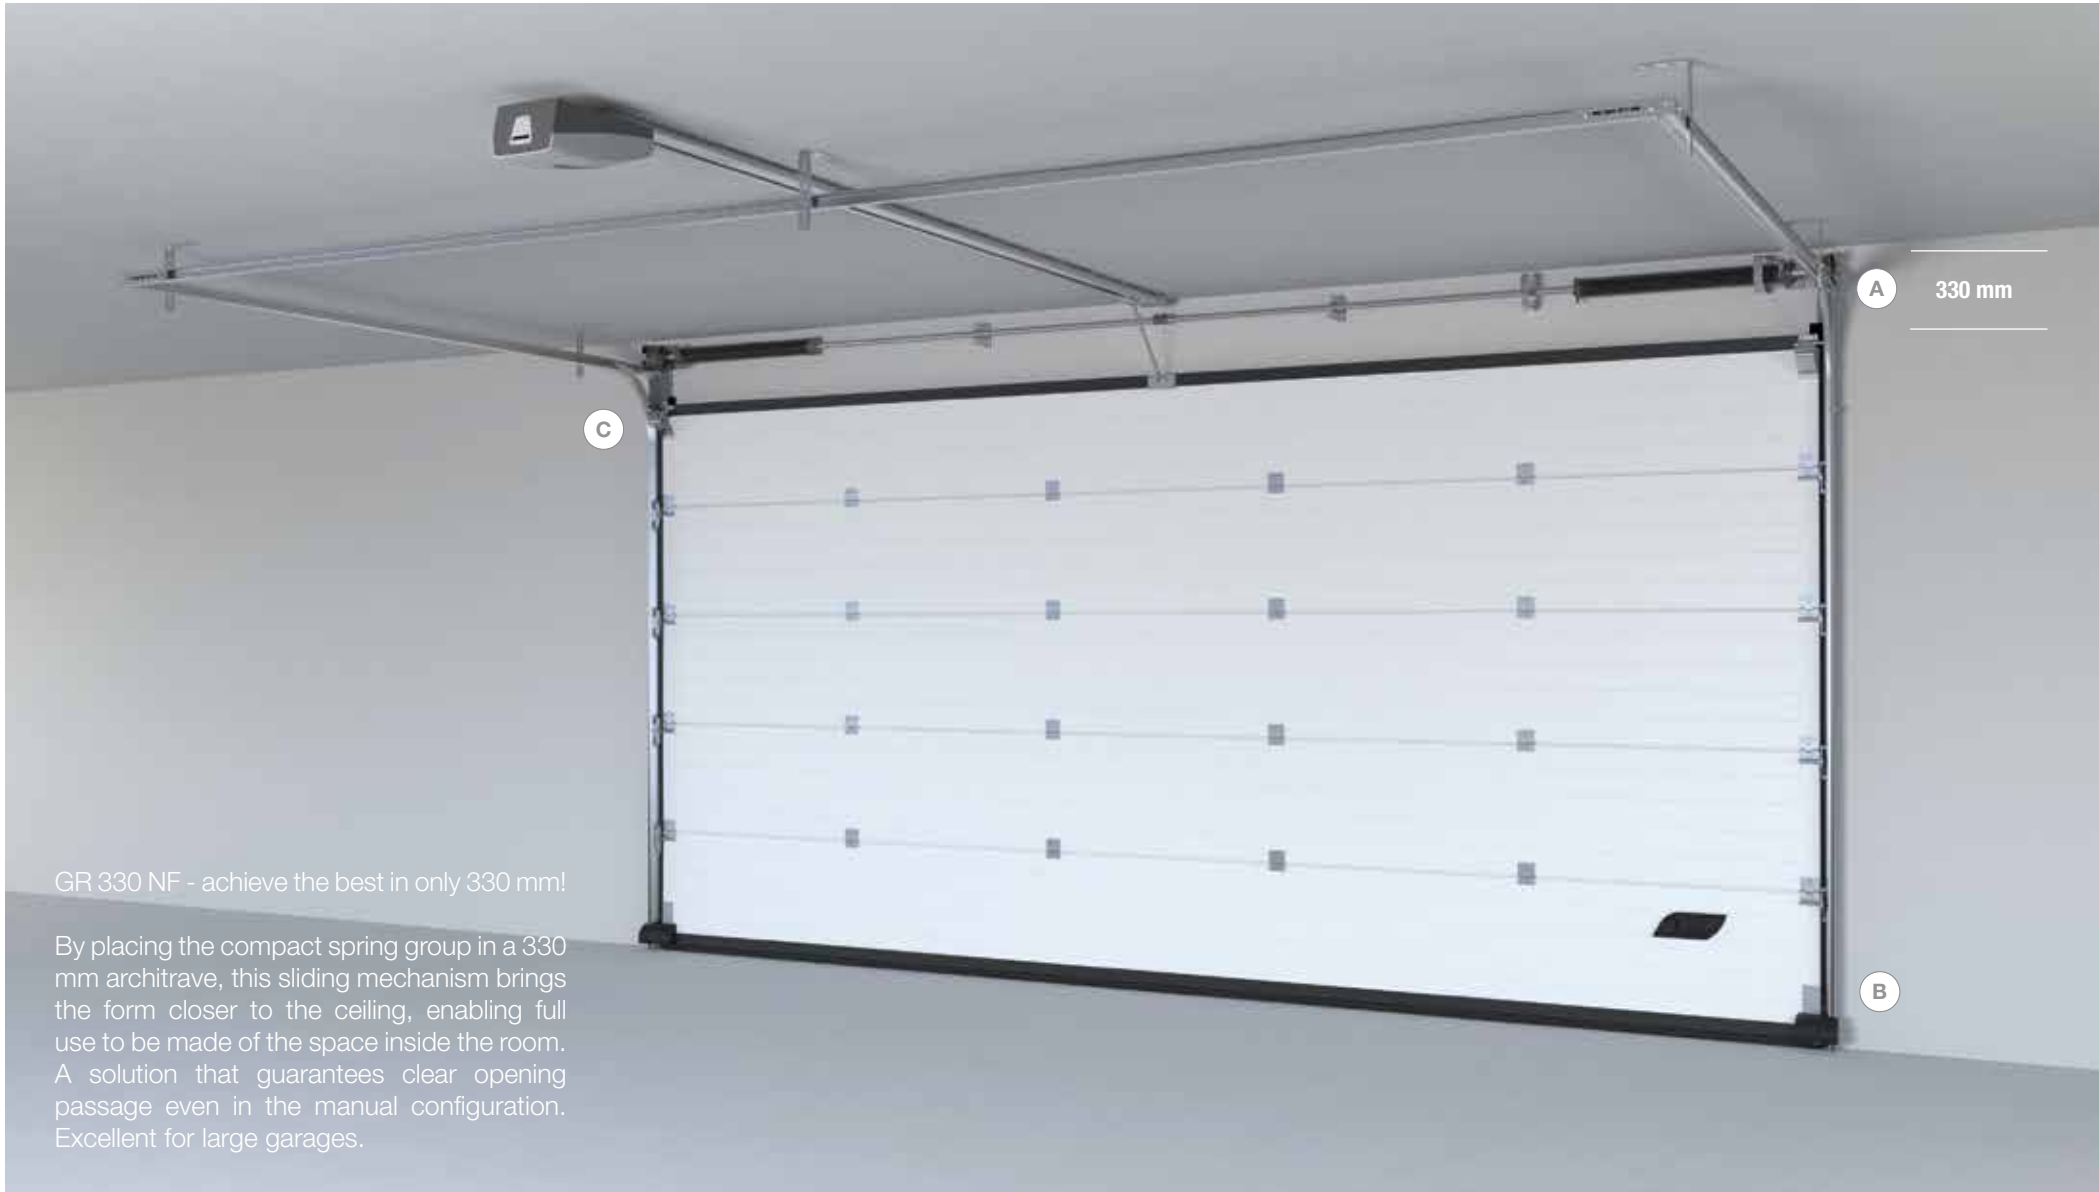

GR 330 NF - achieve the best in only 330 mm!

By placing the compact spring group in a 330 mm architrave, this sliding mechanism brings the form closer to the ceiling, enabling full use to be made of the space inside the room. A solution that guarantees clear opening passage even in the manual configuration. Excellent for large garages.

FOCUS



Ⓐ Architrave dimension
330 mm



Ⓑ Parachute cables as
standard



Ⓒ Single track sliding
mechanism

OPTIONAL MOTOR KIT

GO MOTION PLUS kit, the smart automation kits for your CAME GO door that come complete with: motor, rail, brackets/screws and remotes. Providing them with the system CAME GO ENJOY! can be easily managed by your smartphone and/or tablet. Find out about GO-MOTION PLUS kits, CAME GO ENJOY! and the wide range of accessories on page 174



* Patented



GO-XFRAME / GO-LIGHT*

GO-XFRAME The innovative coplanar system in aluminium for fitting where little or no space is available (jamb - architrave). Allows the additional installation of GO-LIGHT*, the most powerful built-in LED perimeter system you've ever seen in a sectional door. Find out about GO-XFRAME page 92 Find out about GO-LIGHT* page 98



CASING TO COVER SPRINGS

Covering profile in pre-painted, press-bent sheet metal standard RAL 9016 for the moving mechanics of the spring group. Design and functionality.



GO-SIDEX SIDE ATTACHMENT

GO-SIDEX The new system that allows the sliding system to be attached to the side. Perfect in sites with load-bearing side walls, but with front jambs unsuitable for anchoring. Less work on walls, fewer installation costs. Find out about GO-SIDEX SIDE ATTACHMENT page 100



PAINTWORK


A simple touch of personality! Match the tracks and the hinges to the colour of the inner form with RAL 9016 powder-coating.




SIZES AVAILABLE



AVAILABLE ARCHITRAVE

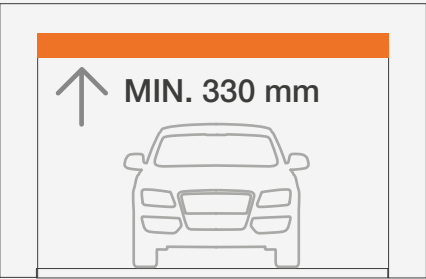

ROOF INCLINE

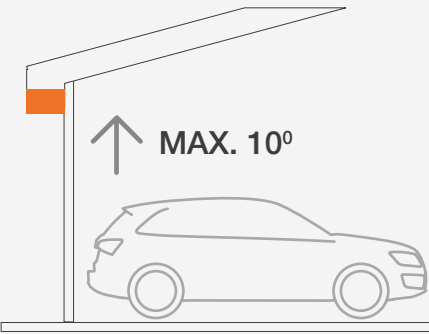

Note: Non-standard measurements available subject to technical feasibility.

MECHANICS

- Pre-assembled torsion spring assembly for available architraves, minimum 330mm.
- Sized for 15,000 cycles (1 cycle = 1 opening + 1 closing motion).
- Sliding mechanism in hot-dip galvanised steel (maximum oxidation protection).
- Ball-bearing sliding components with side shielding for maximum protection against dust and water.


FORM

- Pinch-resistant insulation panels, 40 mm thick, in Sendzimir* hot-dip galvanised steel with high-density polyurethane foam core that is self-extinguishing and CFC-free.
- Watertight and windproof EPDM seals.


SAFETY EQUIPMENT

- Safety device against springs break.
- Safety device against cables break.

VIEW FROM THE SIDE

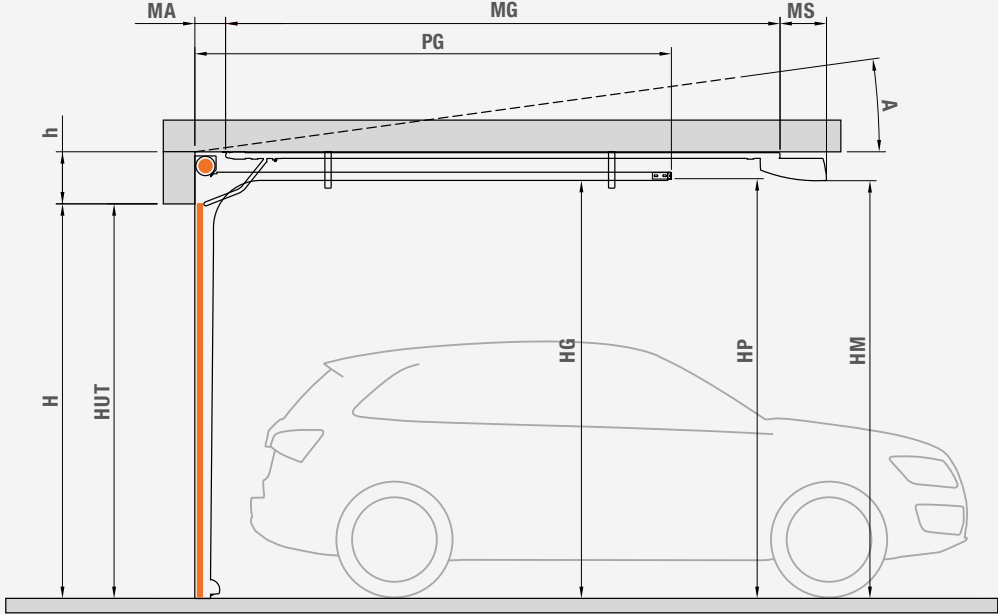

VIEW FROM ABOVE

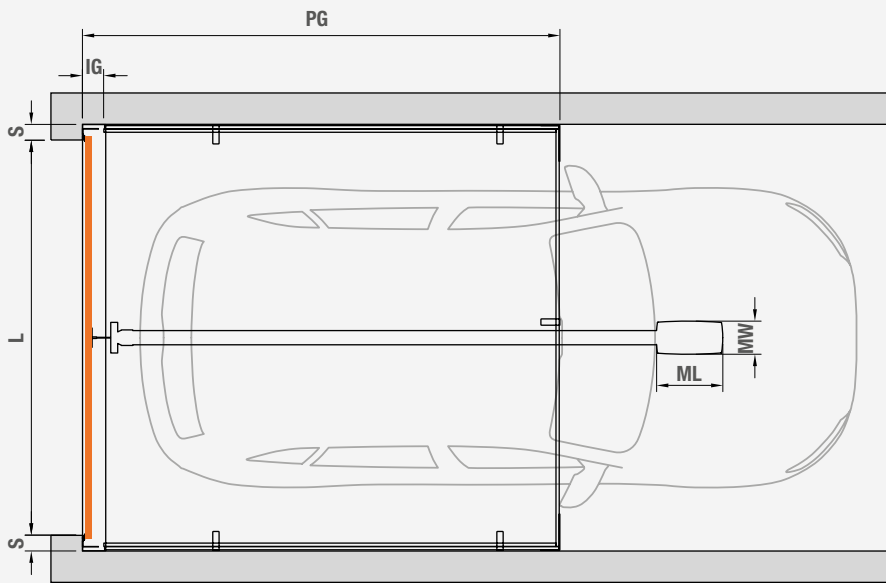


ABBREVIATION	MEANING
H	HEIGHT OF OPENING
h	330 MINIMUM ARCHITRAVE
PG	H + 524 SLIDING MECHANISM OVERALL SIZE
HUT *	H USEFUL PASSING HEIGHT
PT	MA + MG + MS TOTAL DEPTH WITH MOTOR
MA	195 DRIVE TRACK ATTACHMENT**
MS	295 MAX DRIVE PROJECTION*
HG	H + 148 TRACK HEIGHT FROM GROUND
HM	MIN. H - 147 MOTOR HEIGHT FROM GROUND
HP	H - 156 END CROSS PIECE HEIGHT FROM GROUND

ABBREVIATION	MEANING
A	10° MAXIMUM INCLINE OF RAILS (*)
IG	135 SPRING GROUP OVERALL SIZE
L	WIDTH OF OPENING
S	MIN. 100 LATERAL SPACE
ML	MAX 450 MOTOR LENGTH OVERALL SIZE
MW	MAX 215 MOTOR WIDTH OVERALL SIZE
MG	TRACK LENGTH FOR DRIVE MOTOR
	L= 3020 L= 3520 L= 4020
	RACE CAPACITY OF THE GUIDE
	MAXIMUM RAISABLE HEIGHT
	H= 2400 H= 2900 H= 3400

* **Note:** data valid where there is no GO-LEVEL / GO-STEP pedestrian door

Note (*) The maximum incline that can be achieved can go up to 30° with prior check by the CAME GO technical office

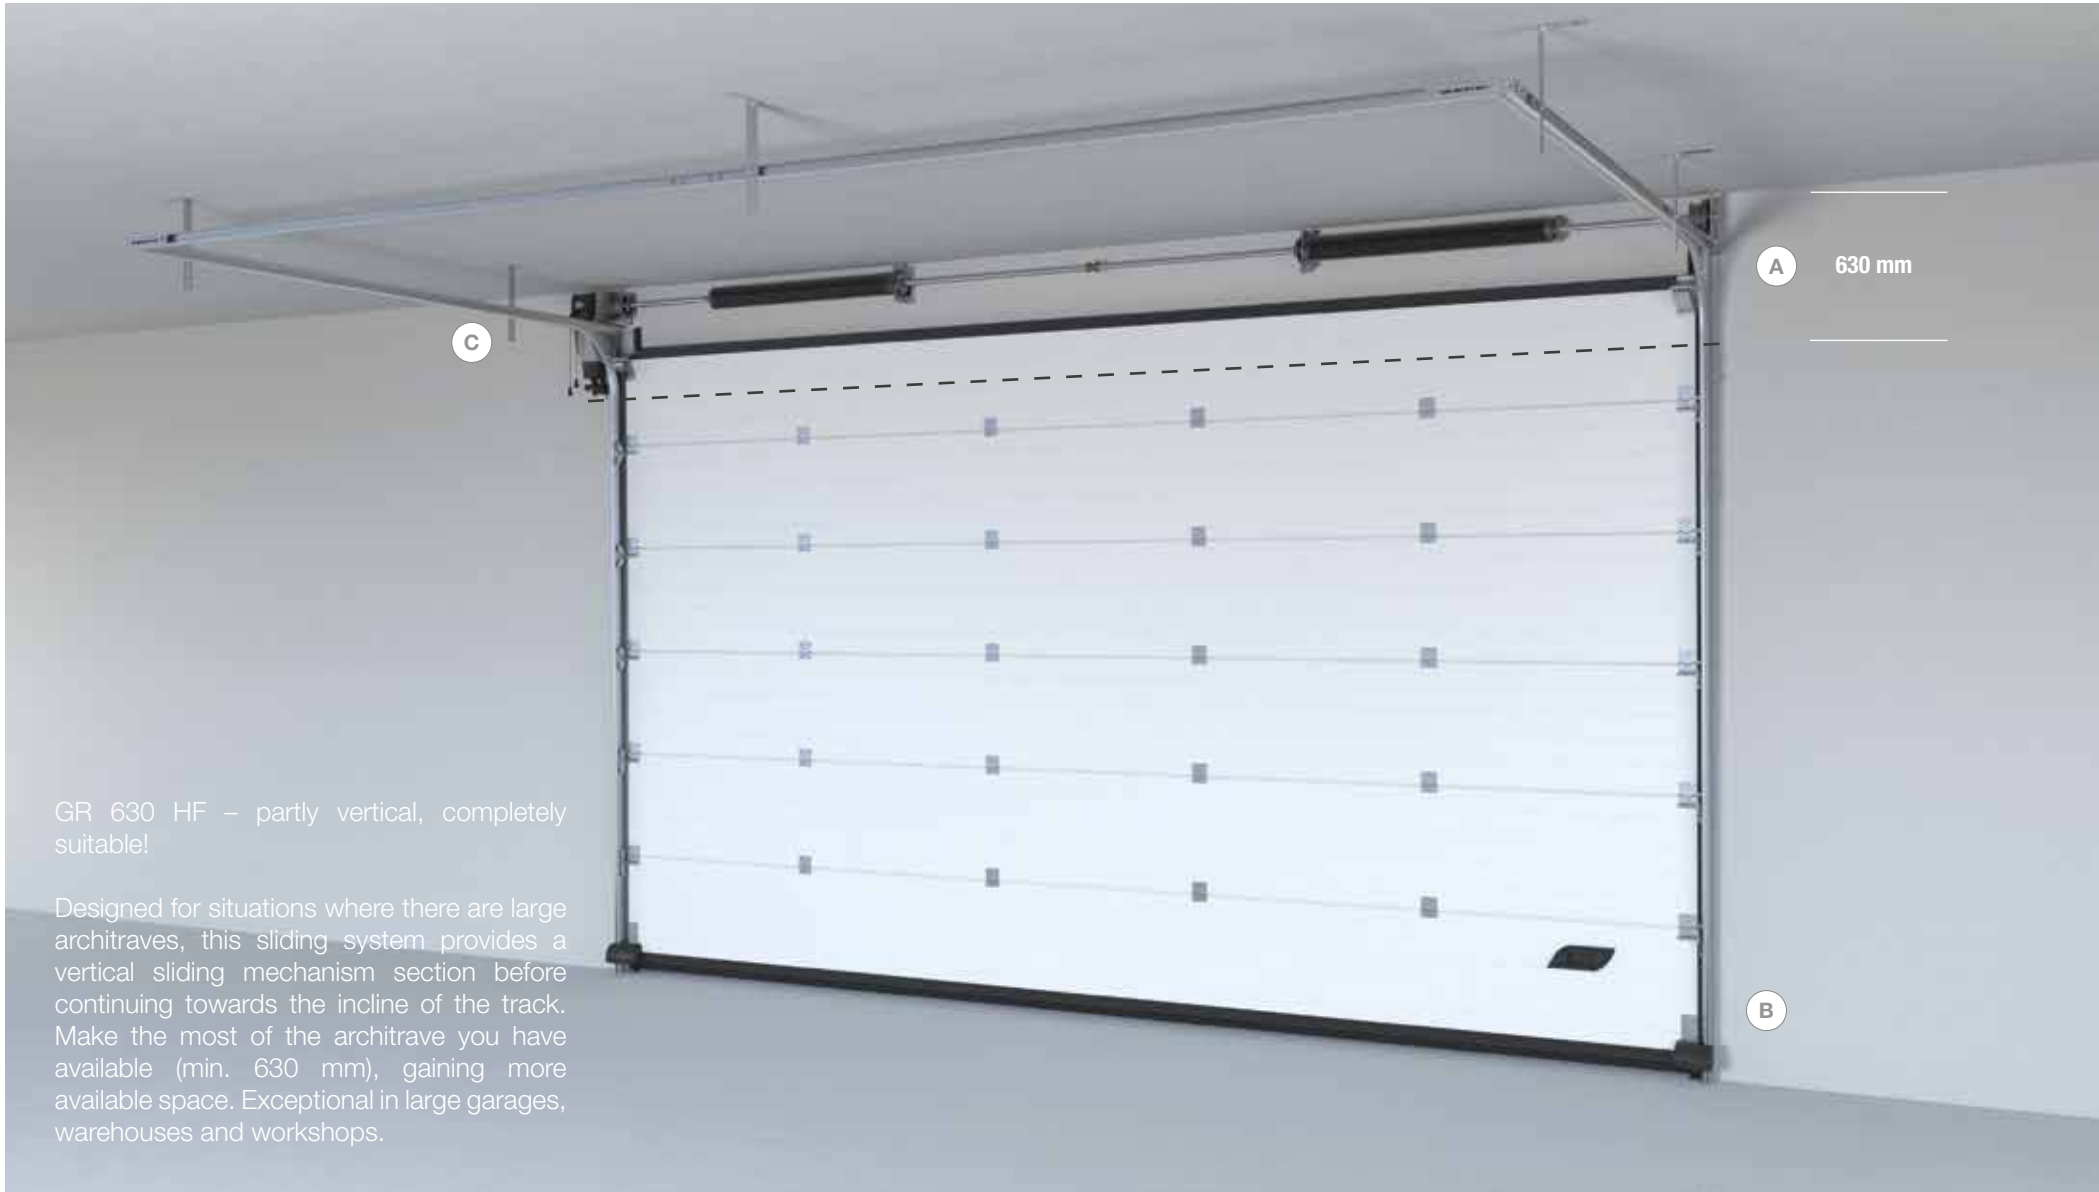

GR 630 HF – partly vertical, completely suitable!

Designed for situations where there are large architraves, this sliding system provides a vertical sliding mechanism section before continuing towards the incline of the track. Make the most of the architrave you have available (min. 630 mm), gaining more available space. Exceptional in large garages, warehouses and workshops.



PAINTWORK

A simple touch of personality! Match the tracks and the hinges to the colour of the inner form with RAL 9016 powder-coating.

FOCUS



A Architrave dimension 630 mm



B Parachute cables as standard



C Single track sliding mechanism


OPTIONAL MOTOR KIT

AUTOMATED AT SIDE
Find out about the GO-MOTION range and the huge range of accessories page 181







SIZES AVAILABLE

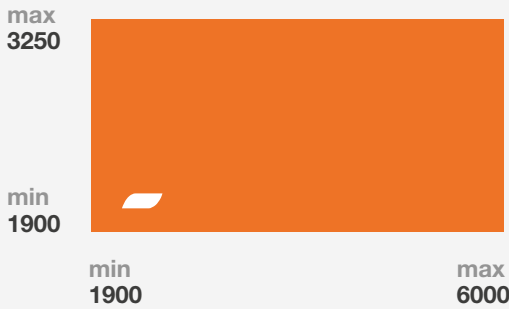

AVAILABLE ARCHITRAVE

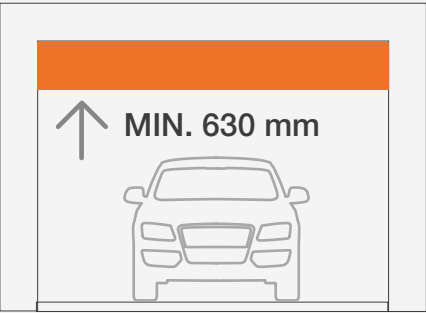

ROOF INCLINE

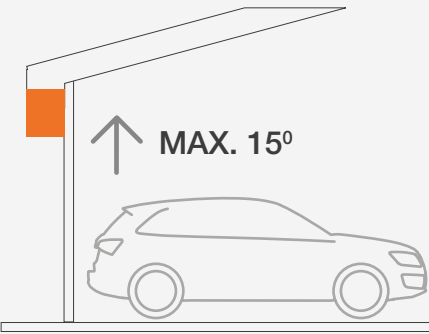

Note: Non-standard measurements available subject to technical feasibility.

MECHANICS

- Pre-assembled torsion spring assembly for available architraves, minimum 630mm.
- Sized for 15,000 cycles (1 cycle = 1 opening + 1 closing motion).
- Sliding mechanism in hot-dip galvanised steel (maximum oxidation protection).
- Ball-bearing sliding components with side shielding for maximum protection against dust and water.


FORM

- Pinch-resistant insulation panels, 40 mm thick, in Sendzimir* hot-dip galvanised steel with high-density polyurethane foam core that is self-extinguishing and CFC-free.
- Watertight and windproof EPDM seals.


SAFETY EQUIPMENT

- Safety device against springs break.
- Safety device against cables break.

VIEW FROM THE SIDE

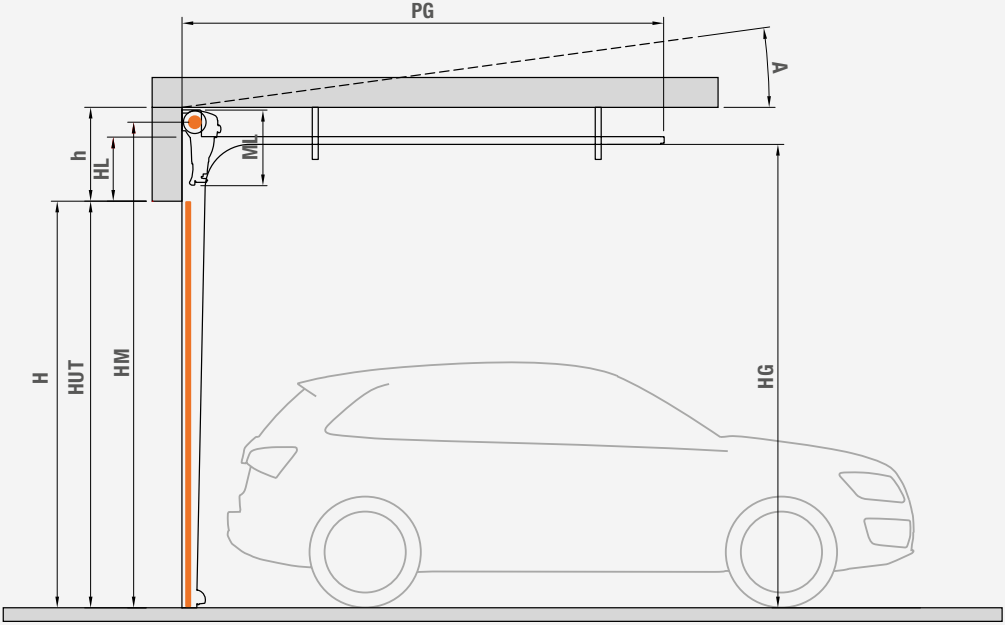

VIEW FROM ABOVE

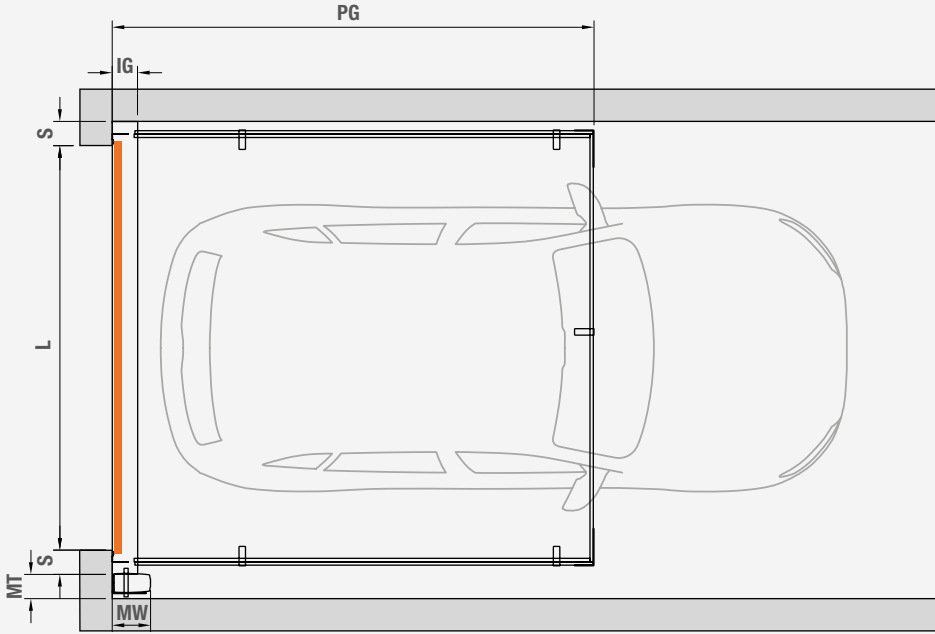


ABBREVIATION	MEANING
H	HEIGHT OF OPENING
h	630 MINIMUM ARCHITRAVE
HL	h - 200 HIGH-LIFT HEIGHT
PG	(H - HL) + 960 SLIDING MECHANISM OVERALL SIZE
HUT *	H USEFUL PASSING HEIGHT
HG	(H + HL) - 52 TRACK HEIGHT FROM GROUND
HM	(H + h) - 100 MOTOR HEIGHT FROM GROUND


ABBREVIATION	MEANING
A	15° MAXIMUM INCLINE OF RAILS
IG	157 SPRING GROUP OVERALL SIZE
L	WIDTH OF OPENING
S	MIN. 150 LATERAL SPACE
ML	MAX 505 MOTOR LENGTH OVERALL SIZE
MW	MAX 240 MOTOR WIDTH OVERALL SIZE
MT	MIN. 150 MOTOR SIDE OVERALL SIZE

* **Note:** data valid where there is no GO-LEVEL / GO-STEP pedestrian door


TYPE OF FIXING

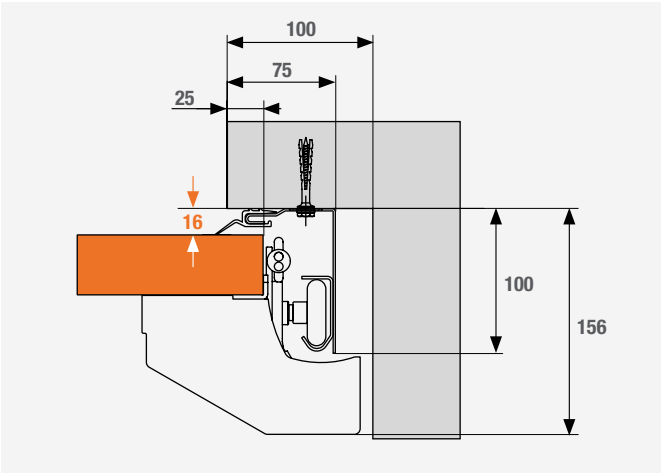


STANDARD ASSEMBLY
Compatible with models **GR100NR, GR150NF, GR180NF, GR250NF, GR330NF**

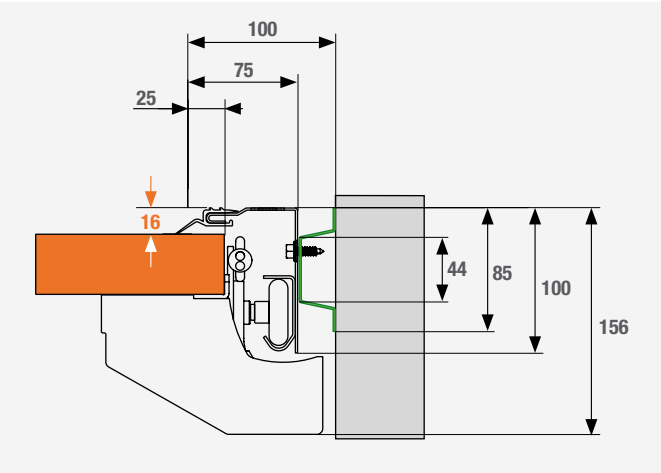

OPTIONAL ASSEMBLY 4
Side mounting with GO-SIDEX system without side space available.
Compatible with models **GR100NR, GR150NF, GR180NF, GR250NF, GR330NF**

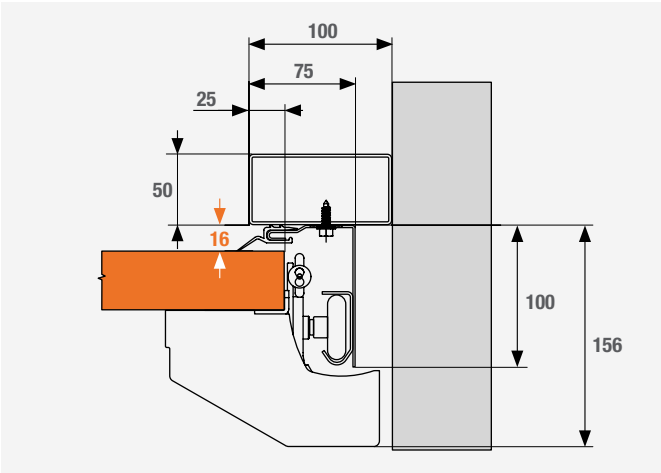


OPTIONAL ASSEMBLY 2
Compatible with models **GR100NR, GR150NF, GR180NF, GR250NF, GR330NF**

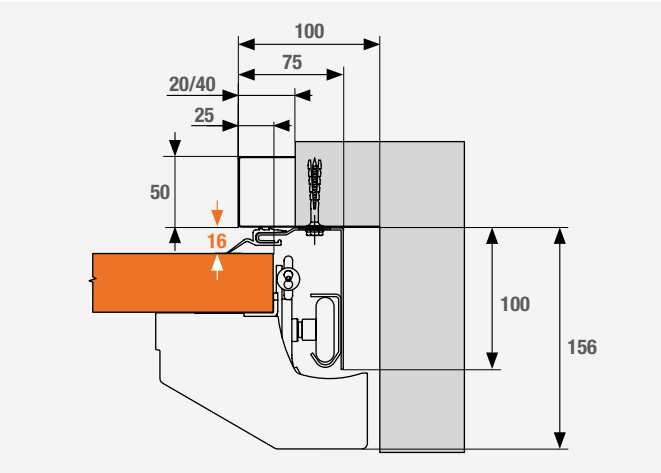


OPTIONAL ASSEMBLY 3
Compatible with models **GR100NR, GR150NF, GR180NF, GR250NF, GR330NF**

TYPE OF FIXING (in tunnel)

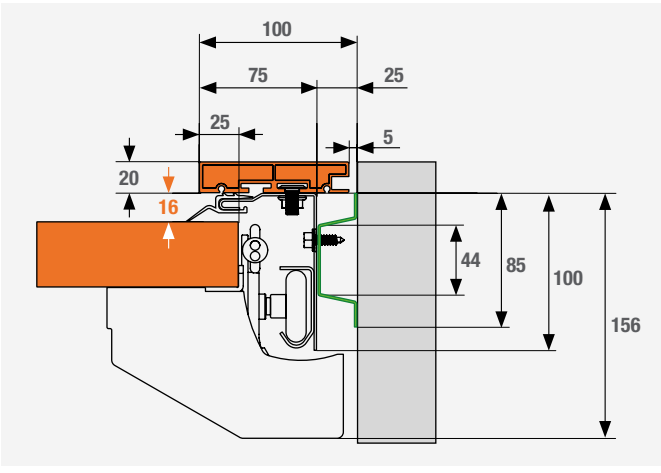


OPTIONAL ASSEMBLY 5
Side mounting with GO-SIDEX system and 100 mm aluminium side frame GO-XFRAME in the opening. Compatible with models **GR100NR, GR150NF, GR180NF and GR330NF**

TYPE OF FIXING (partial overlap)

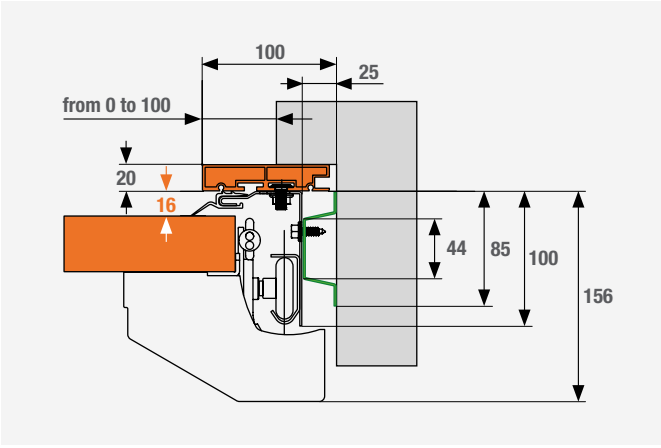


OPTIONAL ASSEMBLY 6
Side mounting with GO-SIDEX system and 100mm side frame GO-XFRAME in partial overlap. Compatible with models **GR100NR, GR150NF, GR180NF and GR330NF**

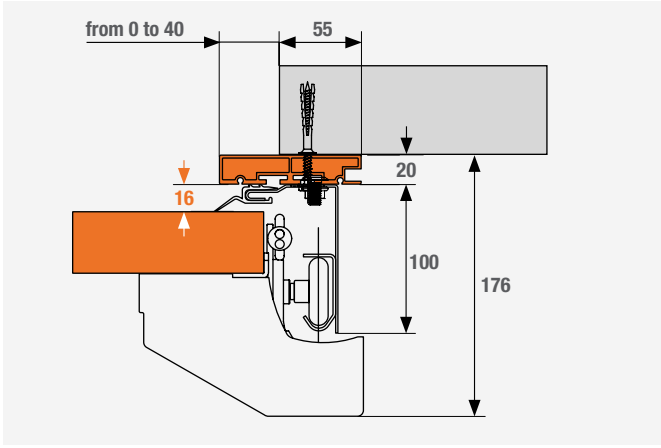


OPTIONAL ASSEMBLY 7
Frontal installation with 100mm side frame GO-XFRAME in partial overlap. Compatible with models **GR100NR, GR150NF, GR180NF and GR330NF**

TYPE OF FIXING (in tunnel)

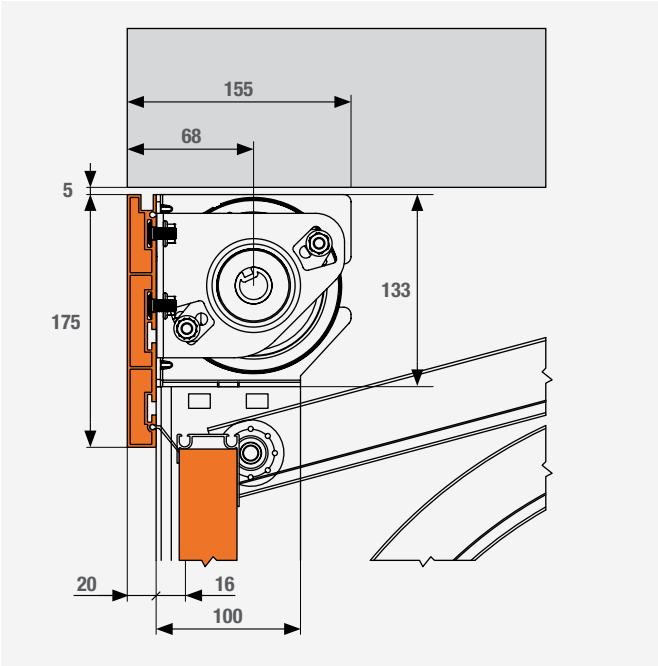


Sectional view of the **GR180NF** model with the GO-XFRAME system in case of absence of space necessary and/or tunnels.

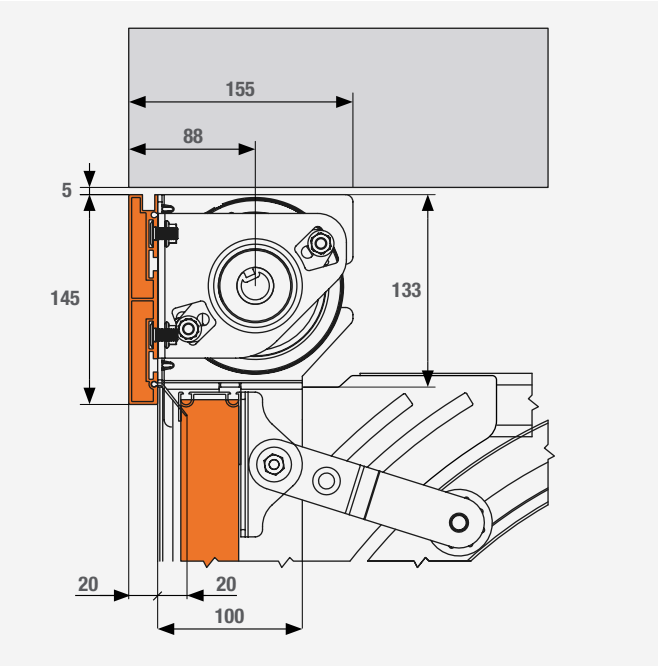


Sectional view of the **GR150NF** model with the GO-XFRAME system in case of absence of space necessary and/or tunnels.

TYPE OF FIXING (partial overlap)

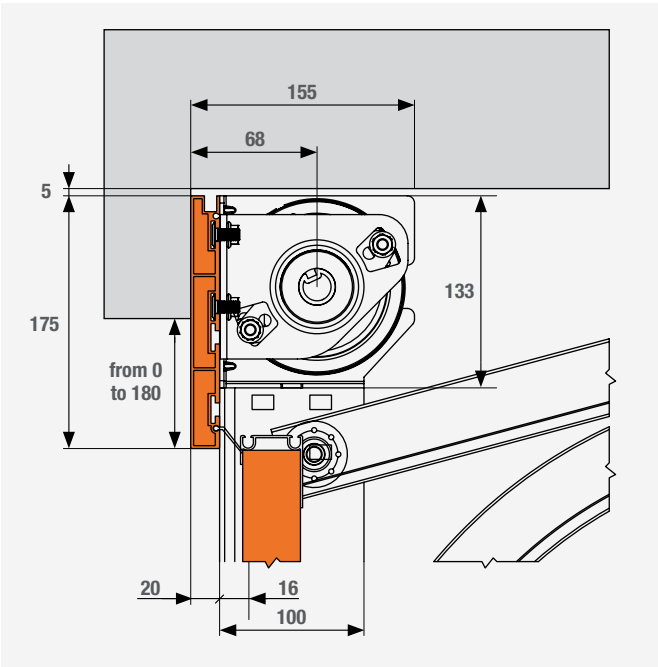


Sectional view of the **GR180NF** model with the GO-XFRAME system in case of absence of space necessary partial and/or reduced.

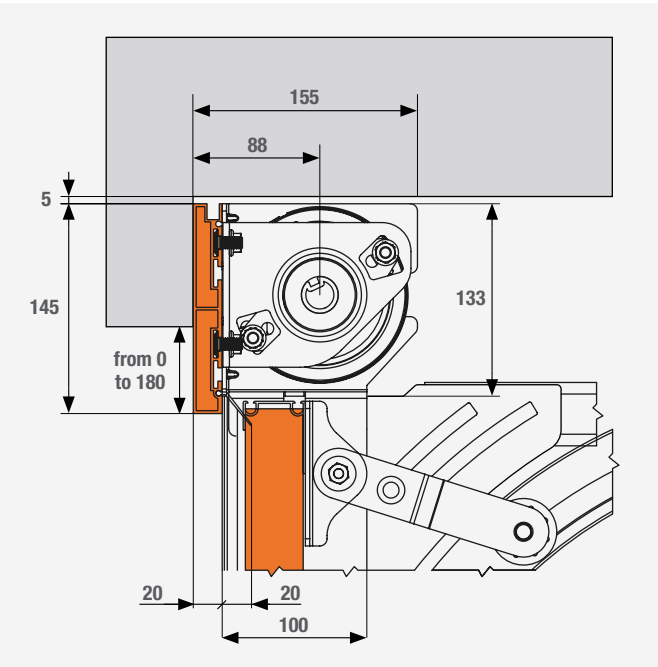


Sectional view of the **GR150NF** model with the GO-XFRAME system in case of absence of space necessary partial and/or reduced.

STANDARD
THRESHOLD

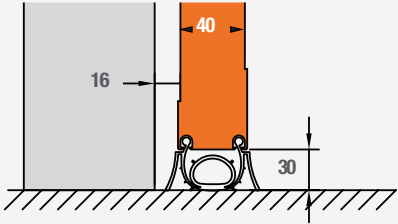


SIZES FOR GO-LEVEL VERTICAL SEAL

GO-LEVEL
PEDESTRIAN DOOR

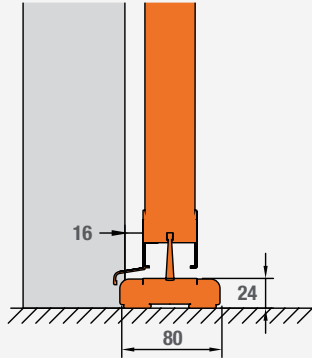

SIZES FOR GO-STEP VERTICAL SEAL

PEDESTRIAN DOOR
WITH STEP

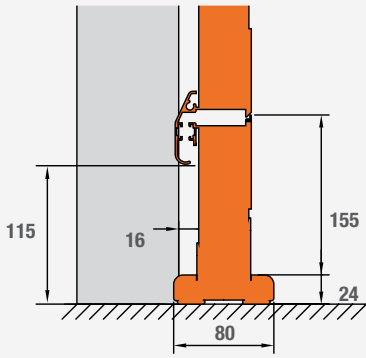



**SPECIAL
SOLUTIONS**

GO-SLIDE

Side sectional door

The GO-SLIDE side sectional door is versatile and can be adapted to any architectural context. The door can slide fully in a horizontal direction, or partially and then in a curved motion, offering a solution for every structural and practical need.



TECHNICAL SPECIFICATIONS

GO-SLIDE is the side sectional door designed to be installed in garages with a low ceiling. Its simple construction makes it easy to install, use and maintain, as it does not require any balance spring assemblies.

The smooth and silent horizontal motion is guaranteed by a dampening system of low carriage wheels. These ensure the door operates correctly even where there is a slight slope in the floor or ceiling. Thanks to the new and exclusive curvature radius, GO-SLIDE is completely safe,

eliminating the problem of pinching fingers between the panels.

The panels that make up the surface of the side sectional doors by CAME GO are insulated and are 40 mm thick. They are available in similar-wood in standard and sample RAL shades, which can be combined with existing doors and windows.

The range can be fully automated.

This product can take care of all doors now on the market, thanks to its minimal measurements. The option for side sliding is the only solution where the walls are not at a perfect 90° angle with each other.

Note: Product on request. Please contact the technical office for information on availability and feasibility.

MAIN CHARACTERISTICS

Pedestrian opening
With GO-SLIDE, there is no need for an integrated or side pedestrian door. The horizontal motion allows free passage, thanks to a partial opening mechanism as needed.

Extremely versatile
It adapts perfectly to every architectural context.

No fittings inside
The unique side-sliding mechanism completely eliminates the need for springs and cables, as well as all of the associated scheduled and unscheduled maintenance work.

Customisable
Numerous accessories are available to personalise your door to taste.

Wide range of colours and finishes
There is no limit to your choice, with a vast range of standard colour options available, together with different types of panels and finishes. And as if that was not enough, the door can be painted in any RAL colour or in created sample paints.

Smaller size
The great advantage lies in the possibility of saving space thanks to the reduced size.

Holding seal
GO-SLIDE is fitted with top and bottom seals. A specific flexible seal has been studied to adapt to any surface during closure.


Floor track
The special floor track lets the form run completely safely and conveniently.

Hidden motor
The motor is fully encased in the tracks, providing excellent aesthetic and installation advantages.

READY TO GO:
the smart kit for building
your sectional door

- **Professional**
High-quality components for precise assembly
- **Practical**
The packaging has been designed to keep the size and delivery costs down
- **Convenient**
Easy economic and logistical management at the warehouse means faster delivery times
- **Safe**
All kit components have undergone strict quality, resistance and operational tests

READY TO GO KIT AVAILABLE SIZES: H: from 2000 to 3250 mm W: from 2000 to 6500 mm

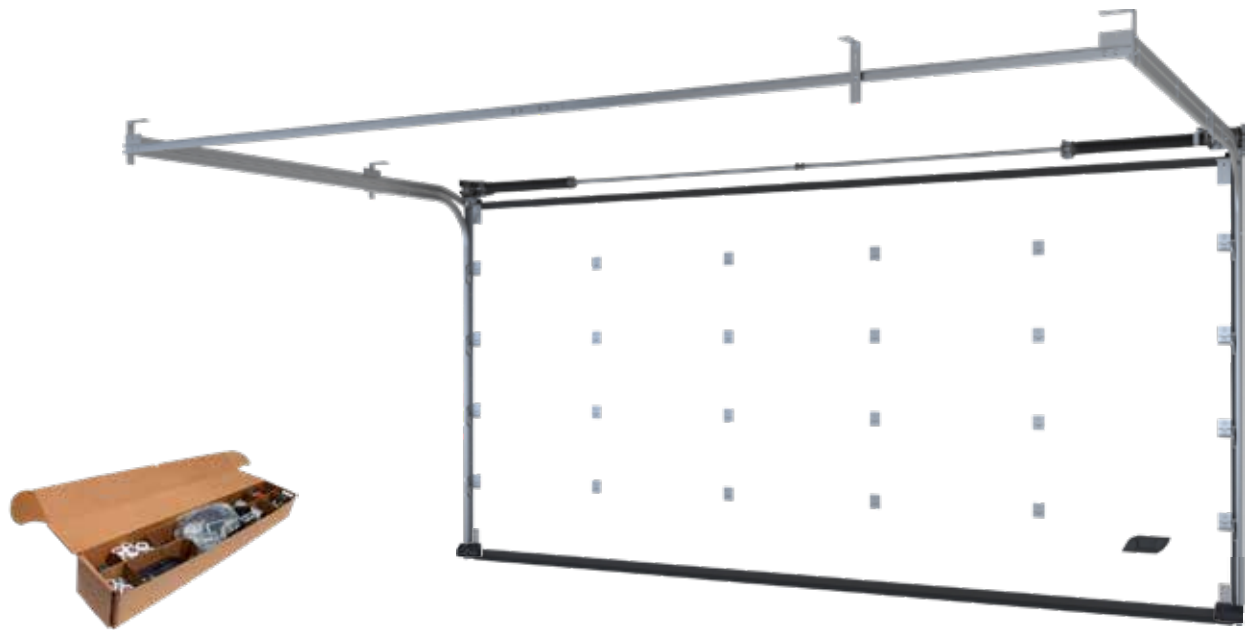

BOM (Bill Of Material)


- **Rails Set**
Residential hardware double rail galvanized GR180NF or single rail GR150NF, with gaskets inside.
- **Spring Shaft Components**
Pre-monted balanced springs and springshafts cut-to-size.
- **Door Coat Components**
Side casing sets H 500 mm + side casing pair H 864 (for joined panel)
- **Aluminium Profile Sets with Gaskets**
Upper/bottom aluminium profile cut-to-size with upper/bottom gaskets cut-to-size included.
- **Accessories Box**
Box prepared with the necessary components inside, with the right quantity and technical specs. according the choosen configuration.
- **Template**
Template with central joint for coupling

NOTE: W > or = 5250 foresee the supply of Omega reinforcement profiles and reinforced accessories.

GO-LEVEL / STEP KIT:
the complete kit to compose
a pedestrian door that can be
installed in a sectional door
coat

- **Comfortable**
The pedestrian door installed in the door coat make the movements between outside and inside easier.
- **Complete**
It contains everything needed to assemble and install a pedestrian door
- **Suitable**
The kit can be matched with the 40mm thick finger-safe-type panels.
- **Safe**
The kit is designed for the integration of locking system with one or more closing points.

GO-LEVEL / STEP KIT AVAILABLE SIZES: W: 800 mm / 900 mm / 1200 mm

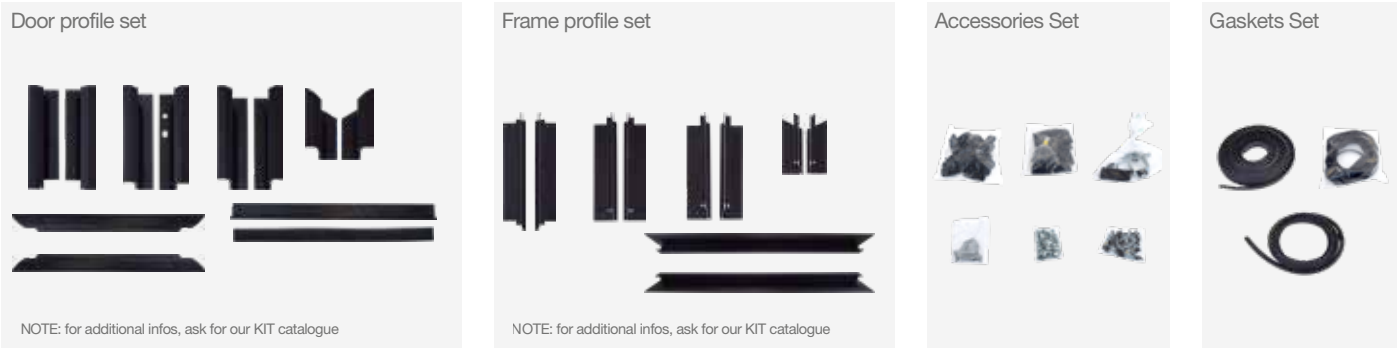

BOM (Bill Of Material):

- 10 pcs aluminium door profiles (9 in case of GO-LEVEL)
- 10 pcs aluminium frame profiles (9 in case of GO-LEVEL)
- 1 pc antidrip aluminium profile
- 1 pc system of regulation self-centering door (GO-LEVEL)
- 1 pc brush gasket
- Bubble gasket
- Thermoplastic gasket
- Epdm gasket
- Threaded inserts
- TCEI self-tapping screws
- Galvanized brackets for door profile's alignment
- T-shaped caps set for door profiles
- Hidden hinges set
- Tear rivets set



NEWS

**FOR SECTIONAL
RESIDENTIAL
DOORS**



CAME GO PREMIUM

When we designed **PREMIUM** we wanted to offer so much more than a full-optional sectional door.

We wanted to provide the customer not only with the best quality of the components, but also with a real connection with their garage door.

Because the real freedom is the power to do whatever you want.

This is for us
PREMIUM



CAME GO PREMIUM
At your command.

Open, close, stop.

Through your own user profile you can check with a few clicks your garage door and receive any alert notifications concerning its status.

CAME GO PREMIUM
The sectional door completely at your disposal. Everywhere and always.

Has Chiara closed the garage door going to work? Where did I put my remote control? Luca is coming back earlier to get his bike, how can I open the garage from my office?

CAME GO PREMIUM is the answer to these questions! Thanks to its developed standard equipment, including the system CAME GO ENJOY!, you will be able to manage and remote control your garage door. Just a few steps will suffice to create your user profile and to install the dedicated app. Open and close your CAME GO door when and how you want!

Very easy and completely free.

CAME GO ENJOY!

Enjoy the advantages of a kit thought to make the management of your garage easier. Minimal design and small size make it perfect for every living environment.



CAME GO PREMIUM

ALWAYS WITH YOU

Download the CAME AUTOMATION app, available on iOS and Android to manage your garage door directly from your smartphone or from your tablet.



CAME GO PREMIUM

TOP PRIVACY & SAFETY

Your CAME CONNECT user profile ensures absolute privacy and safety.

Besides enabling you the app installation, it allows you to request assistance directly to your installer.

Visit our website for more details.



CAME GO PREMIUM



CAME GO PREMIUM
Tailor-made for you.

Putting at your disposal what we do best is our history. Everything our customers always wanted for their own garage door.

CAME GO PREMIUM
Absolute white for an unique feel.

We choose white color to point out the idea of design and independency. Traditional or minimal? It doesn't matter! The special laquering powder coating type in similar RAL color 9016 of accessories and sliding guides, has the ability to boost the space and to maximize the brightness of any type of rooms.

An enjoyable sensation of white elegance matches our attention to safety thanks to spring shaft cover-casing.

A tidy and protected environment.

IF YOU DON'T SEE, YOU CAN'T TOUCH

Tailored-made cover casing, white-painted in similar RAL color 9016. It prevents accidental contact with working parts, by offering a clean and tidy design.



CAME GO PREMIUM

TONE ON TONE

To guarantee functionality and strength by raising the aesthetics. That's why we give you the white painted components in similar RAL color 9016.



CAME GO PREMIUM

A PLEASANT VIEW

A touch of color that extends the view. The white-painted rails in similar RAL color 9016 merge mechanics and architecture, making the structure "invisible".



CAME GO PREMIUM



EXTERNAL VIEW



INTERNAL VIEW



CAME GO PREMIUM
Choose the color you want. Or he wants.

PIANO - DOGATO - RIGATO - MILLE RIGHE
Choose the panel you want.

CAME GO PREMIUM is available for you in every finishing and standard colors or sample.

No limit to your imagination.

CONTACT **your** local dealer for more details.

DESIGN



White-painted rails in similar RAL color 9016



White-painted accessories in similar RAL color 9016



Spring shaft cover-casing in simil RAL color 9016

HOME AUTOMATION



CAME GO ENJOY! kit to remote control the automation



CAME AUTOMATION app available on iOS and Android



CAME CONNECT profile completely free

SAFETY



Cable safety device - it stops the door coat in case of cable break



Springs safety device - it stops the door coat in case of springs break



Pair of photocells - prevents the work in case of obstacles

TECHNOLOGY




GO-MOTION PLUS 100 / 130 Automation



GO-LIGHT PLUS flashing-light Amber or light-blue color



GO-SELECT AIR selector with key-board via radio
TOP PLUS pair of transmitters Pink + Black

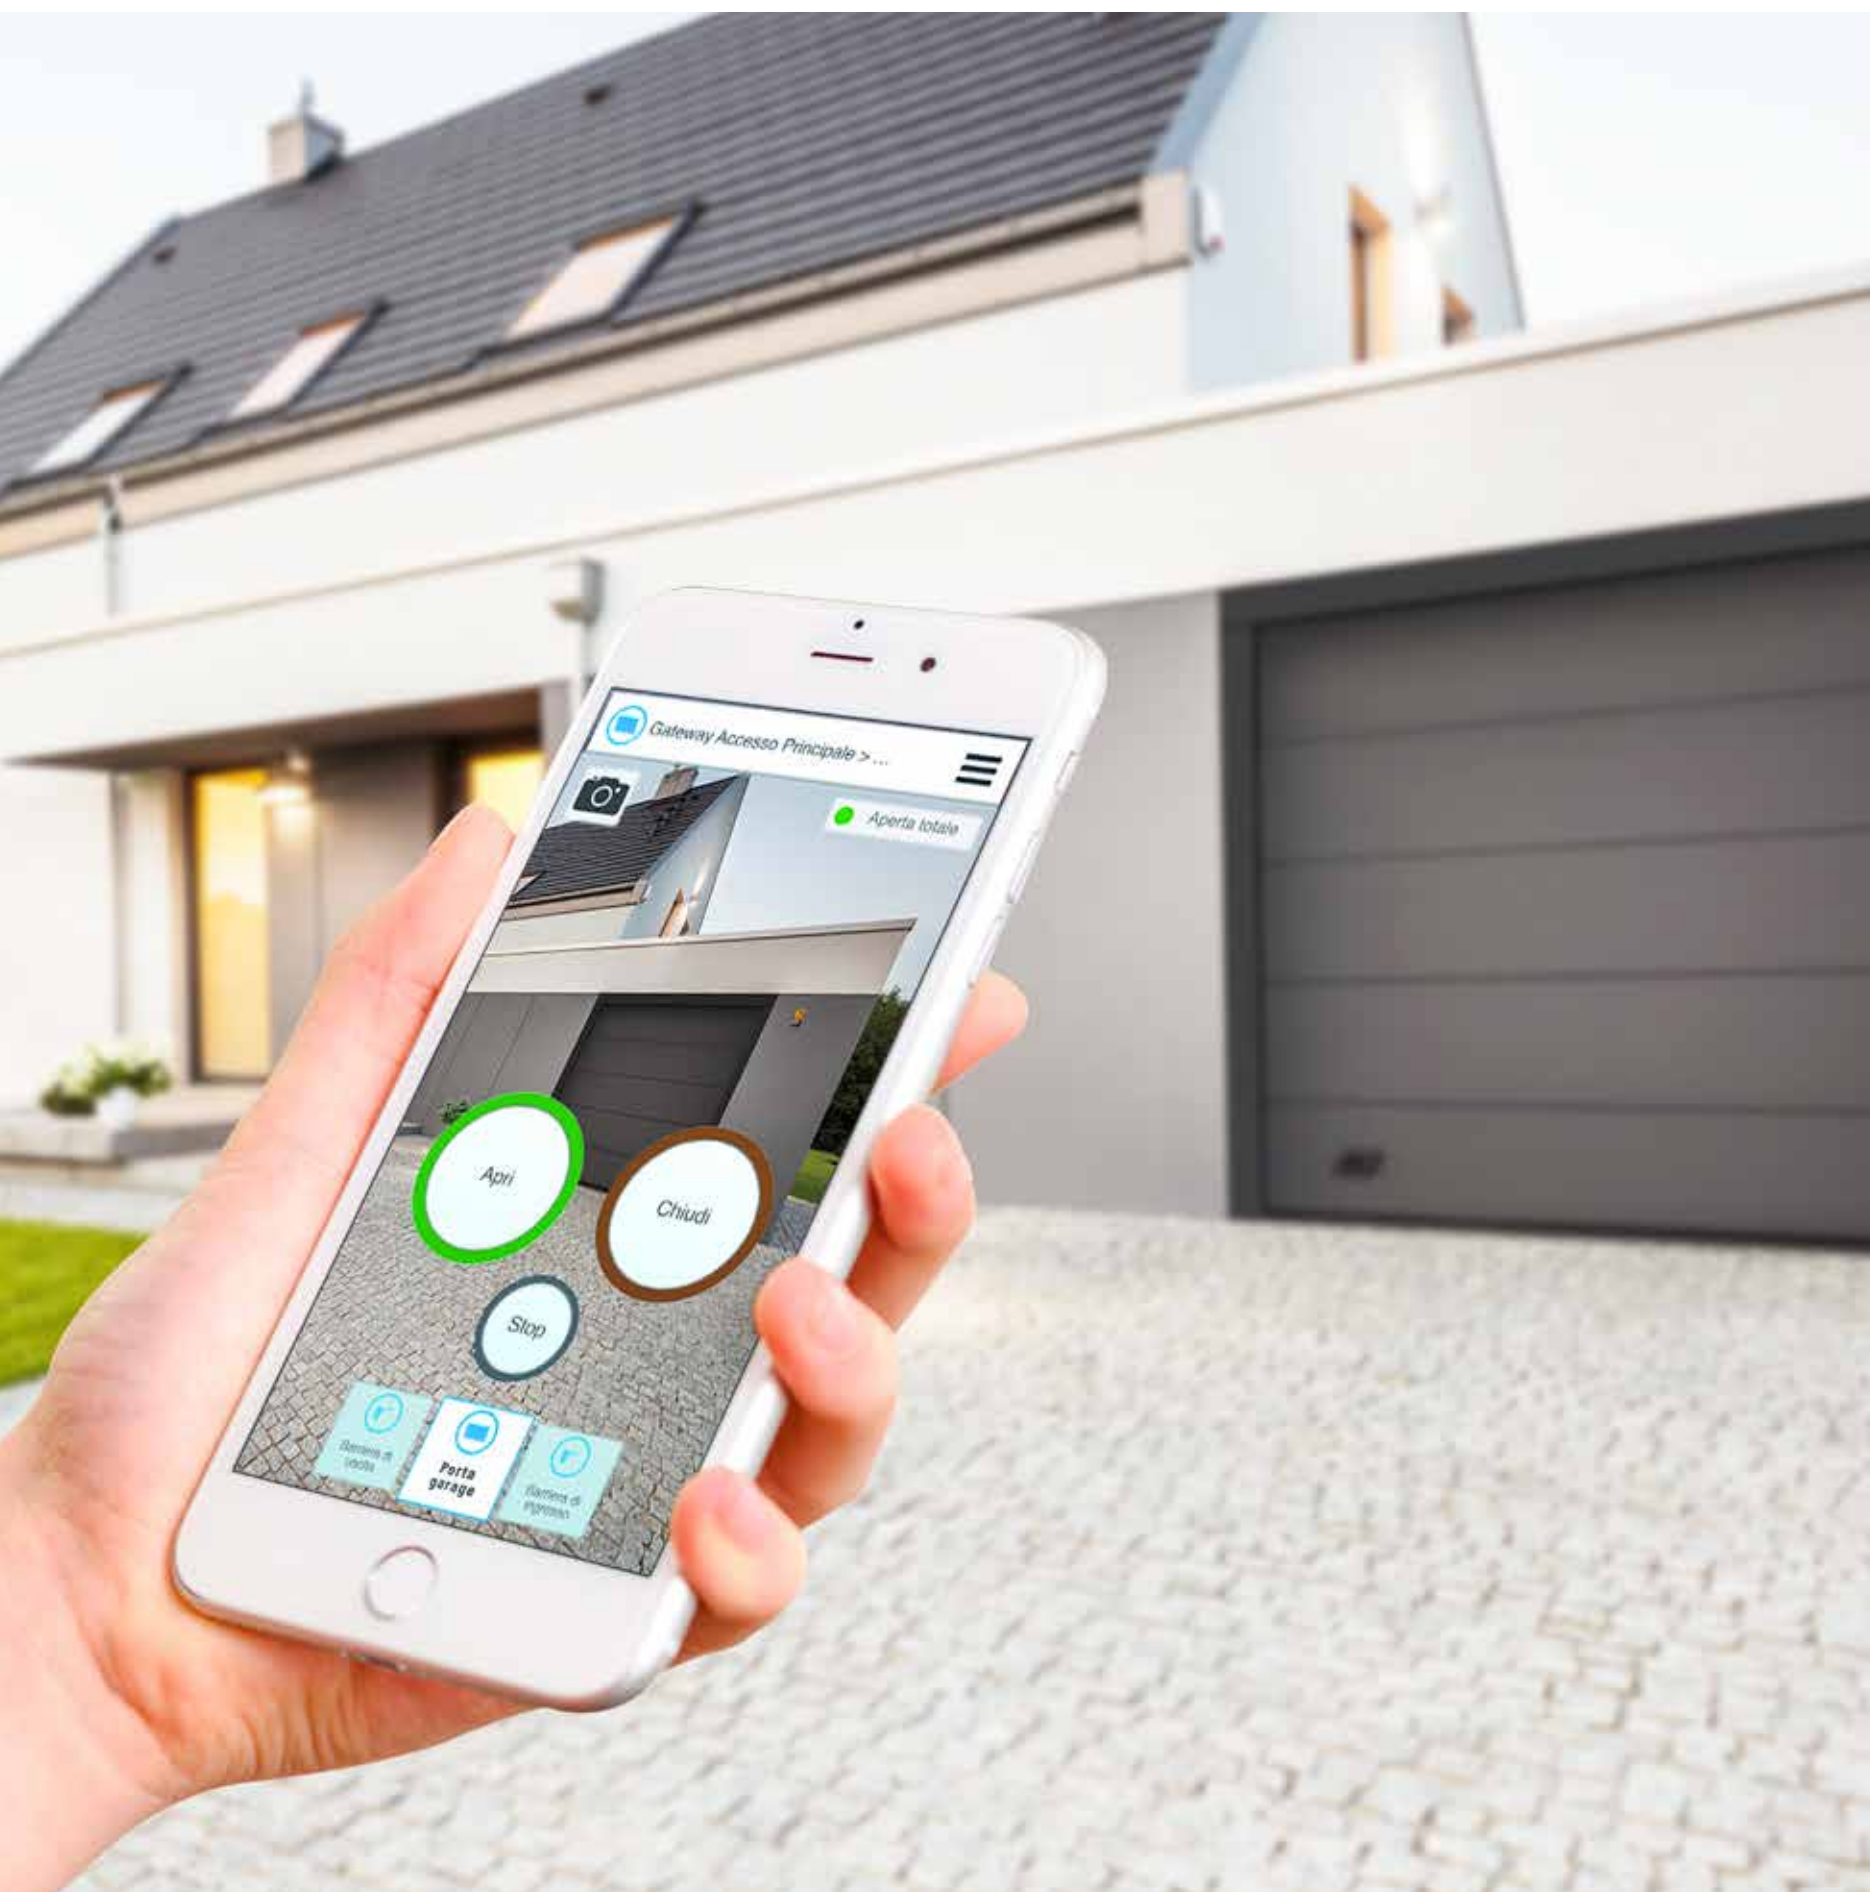

CAME GO ENJOY!

Connection to the Cloud changes the way of living the automations, revolutionizes lifestyles by ensuring comfort and **safety**.

Thanks to the **CAME GO ENJOY!** kit, you will be able to manage and check your **CAME GO** garage door from every mobile device such as smartphone and tablet.

You can leave your remote at home or open your garage door for your everyday necessities.

Complete freedom in total safety CAME Cloud.

Find out about the **CAME GO ENJOY! KIT**



CAME GO ENJOY! : the wi-fi kit that allows you to remote control your CAME GO garage door.

You forgot your remote? Or do you need to long-distance open your garage door to allow your boy/ girlfriend to get their bike or to unload your groceries? **CAME GO ENJOY!** is the solution! Thanks to this handy kit you can control your garage door directly from your device (Android and iOS) wherever and whenever you want.

CAME GO ENJOY! will be your personal garage assistant, tireless and always available!

KIT CONTENTS



CAME GO ENJOY! is a complete kit! modues + cables



Gateway module with ethernet access for internet connection



Receiver transmitter module, inclusive of cables and card



Dedicated APP **OPEN, CLOSE** and **STOP**. Customizable home screen!



INSTALL THE AUTOMATION MODULE

Your trusted technician will arrange the connection of the wireless module to your automation.
A few minutes will be needed for a functional and discreet setup.



FASTEN THE GATEWAY MODULE

Plug the gateway module to your home internet connection.
It's very easy! You only have to plug in the ethernet cable.



SET UP YOUR CAME CONNECT PROFILE

Visit the website www.cameconnect.net and set up your personal profile.
Follow the instructions that you can find in the gateway module.



CONTROL YOUR DOOR DIRECTLY FROM YOUR DEVICE!

Install the CAME AUTOMATION app by entering your CAME CONNECT profile data .


Control your CAME GO door directly from your tablet or smartphone!




GO-XFRAME

GO-XFRAME: is the innovative door with aluminium profiles that brings together aesthetics and technology.

- **THE SOLUTION IN SOME SITUATIONS:** Thanks to its dimensional modularity, it allows a garage door to be installed in particular types of situation: E.g. partial or complete absence of architrave and/or jambs.
- **REDUCED SIZE OF INSTALLATION SPACES:** thanks to its being only 20 mm thick, GO-XFRAME takes up less space giving the advantage of greater installation flexibility.
- **COPLANARITY OF FRAME:** the assembly system allows the elements that make it up to be totally coplanar.
- **LED DESIGN:** set up for the insertion and cabling of LED strip lights, completely built into the aluminium profile (GO-LIGHT*).

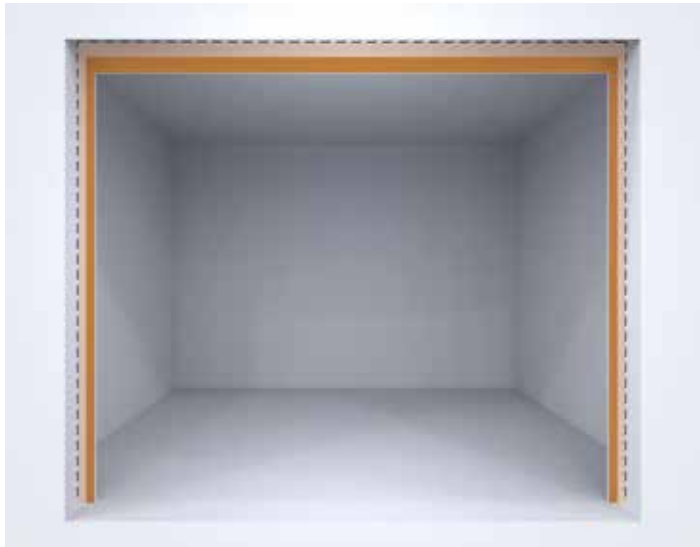

EXTERNAL VIEW

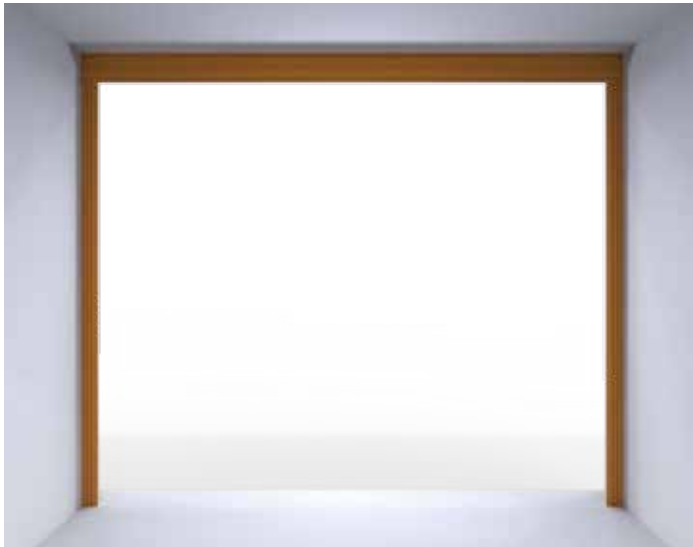

INTERNAL VIEW

PROFILES AVAILABLE



① 100 mm profile



② 150 mm profile




③ 180 mm profile




④ 150+180 mm profile


UNIQUE SOLUTION FOR ALL SITUATIONS

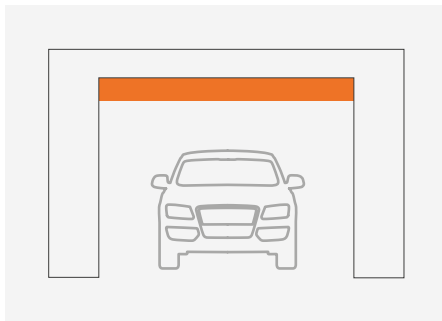


No architrave

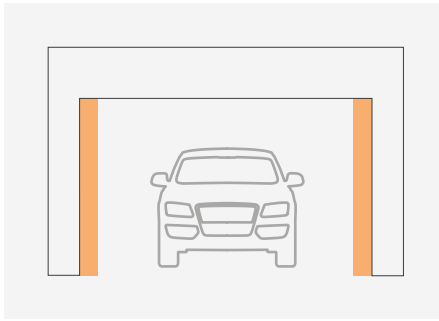

No laterals

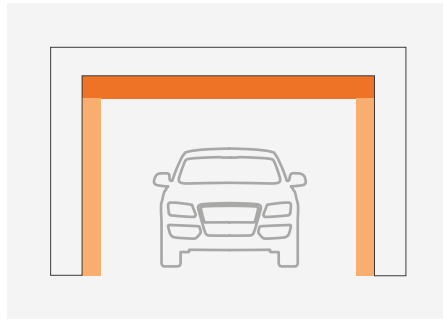


A tunnel

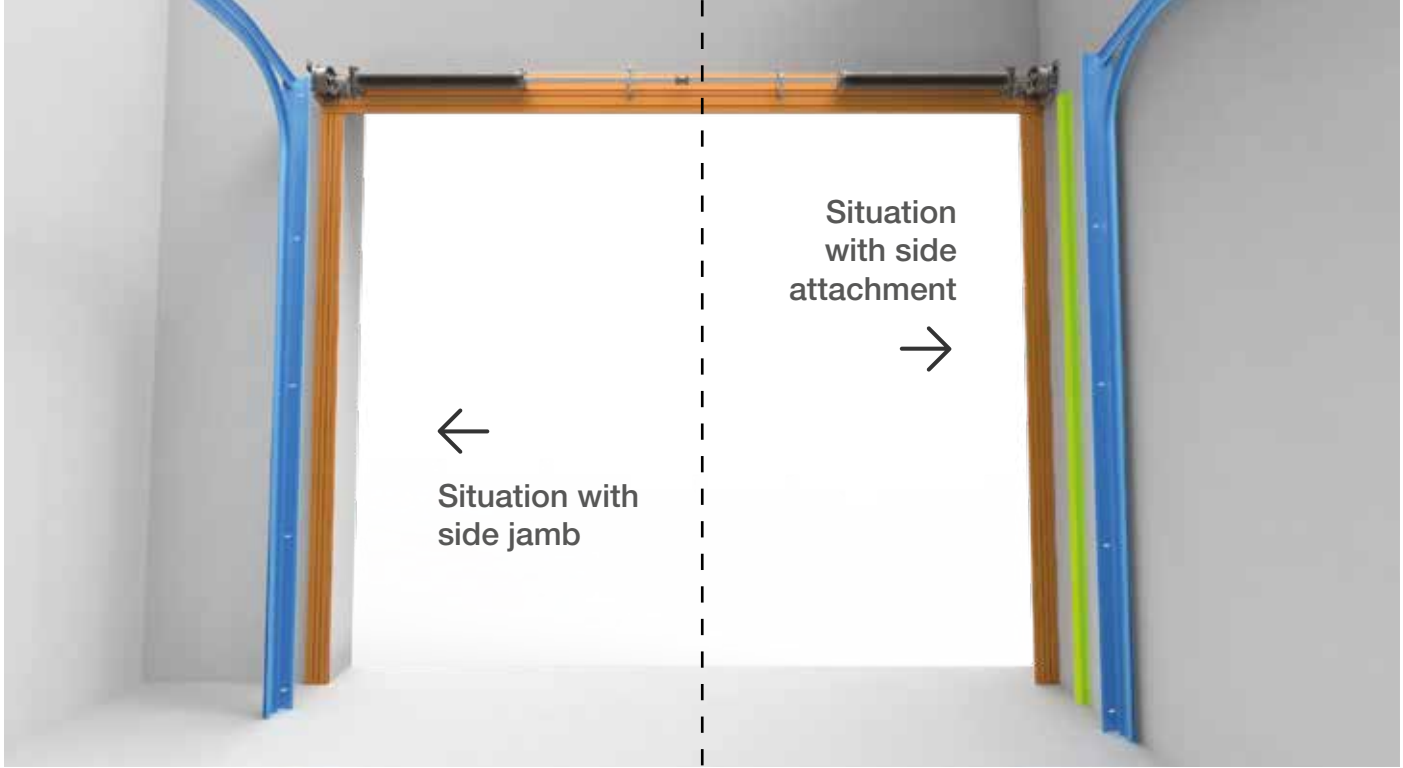

The GO-XFRAME is a coplanar filler frame made up of special profiles in aluminium with a symmetrical section. The profiles designed to provide maximum resistance containing weights, have the relevant cables for the assembly of the vertical angle bracket, the installation of the top seal, the spring shaft bracket and of course the installation of the GO-LIGHT* system. The empty areas inside it create spaces that can be used to pass cables through for accessory systems.

Thanks to its versatility, the GO-XFRAME system can be fitted: as a filler - on the front - on the side with the GO-SIDEFIX system (optional).

GO-XFRAME available in standard colours BLACK SIMILAR RAL 9005 - WHITE SIMILAR RAL 9016, can be painted in SIMILAR RAL colours / sample shade or in casing.

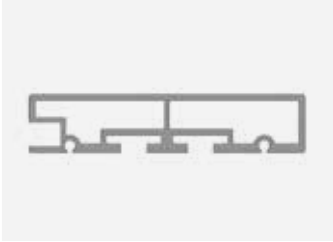

SECTION OF ONLY 20 MM

STANDARD COLOURS



WHITE
SIMILAR RAL
9016



BLACK
SIMILAR RAL
9005




COPLANARITY OF THE ELEMENTS




READY FOR INSTALLATION OF GO-LIGHT*

TUNNEL INSTALLATION
(IN THE OPENING)

Architrave profile Jamb profile GO-SIDEX Side attachment

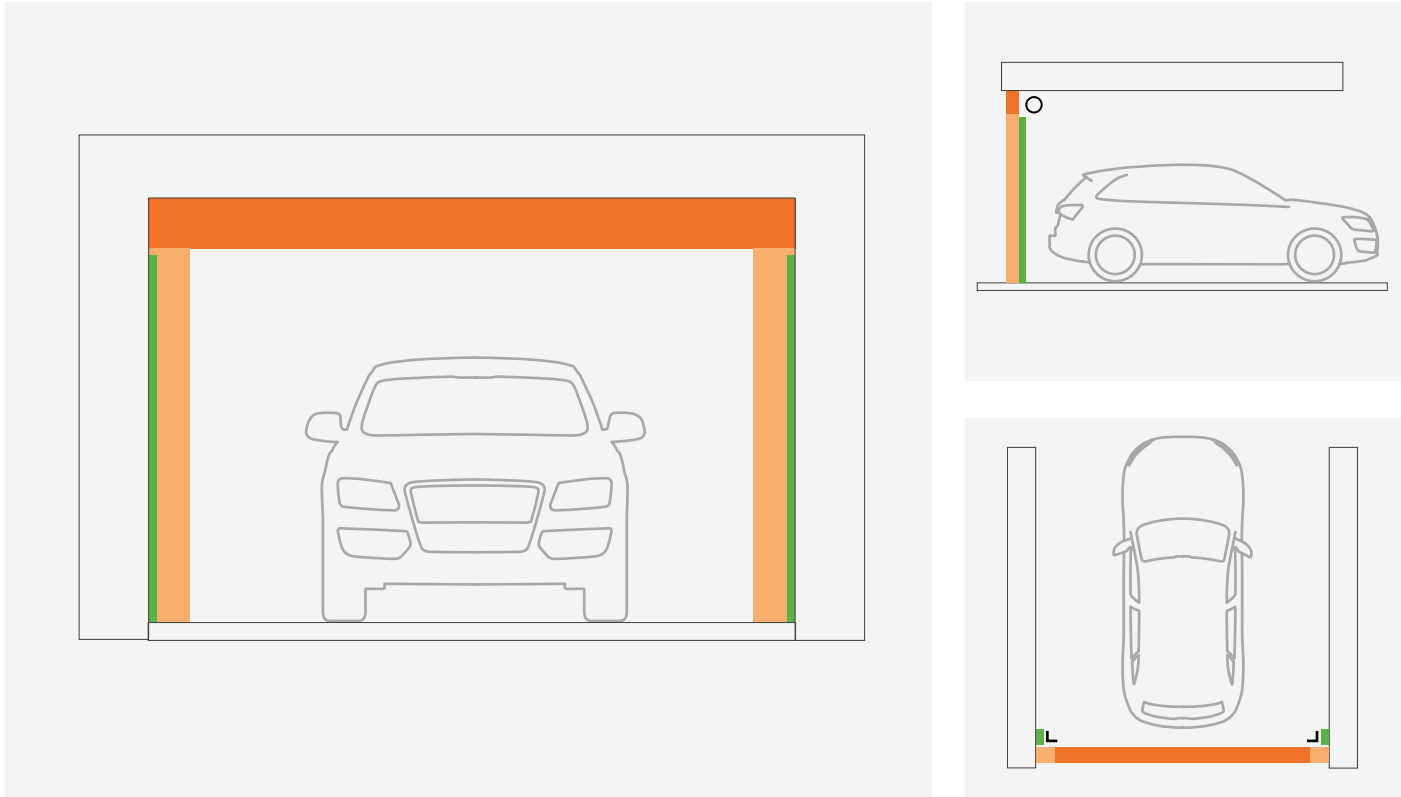


INSTALLATION TOTALLY ON TOP (OUTSIDE THE OPENING)

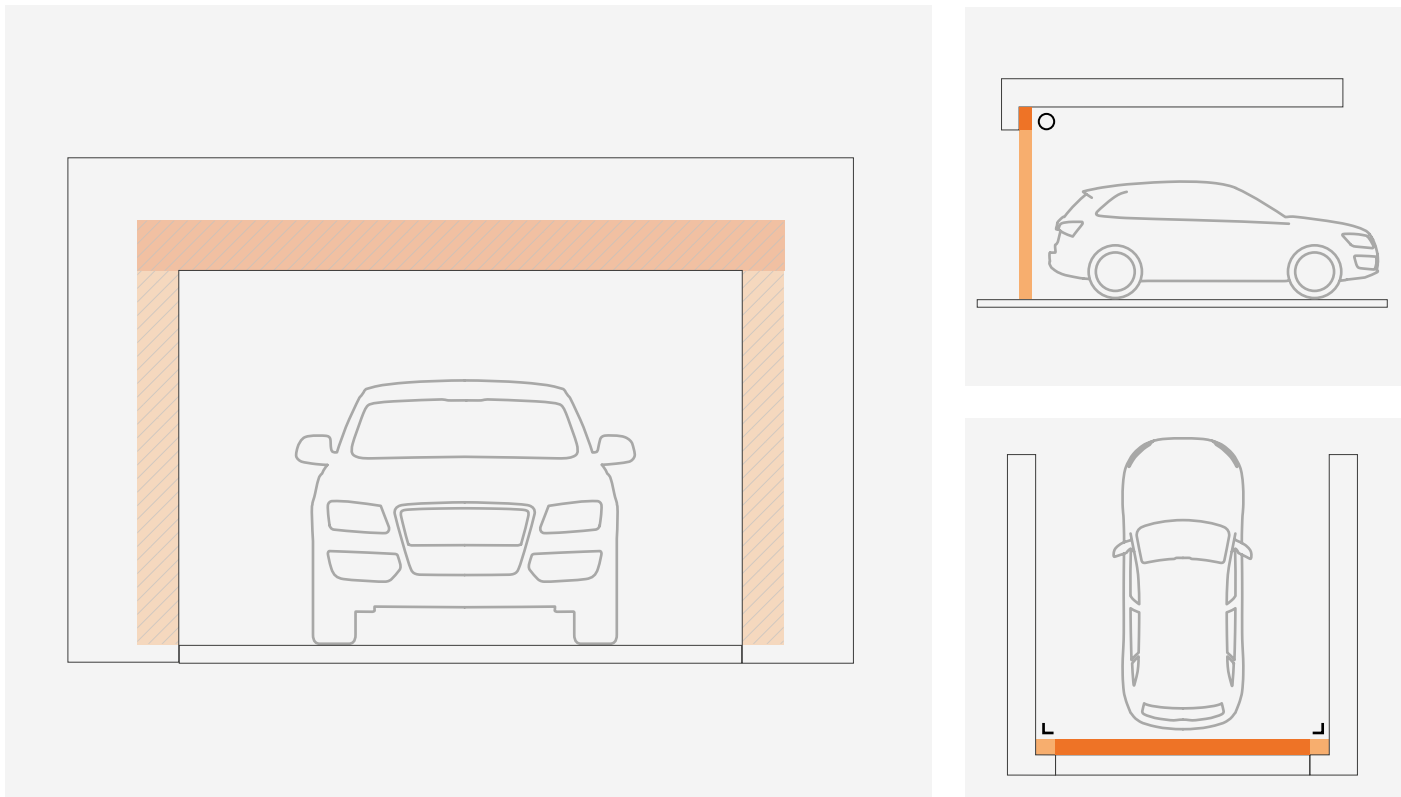


INSTALLATION ONLY OF PROFILE
HEADER (IN THE OPENING)

Architrave profile Jamb profile GO-SIDEX Side attachment

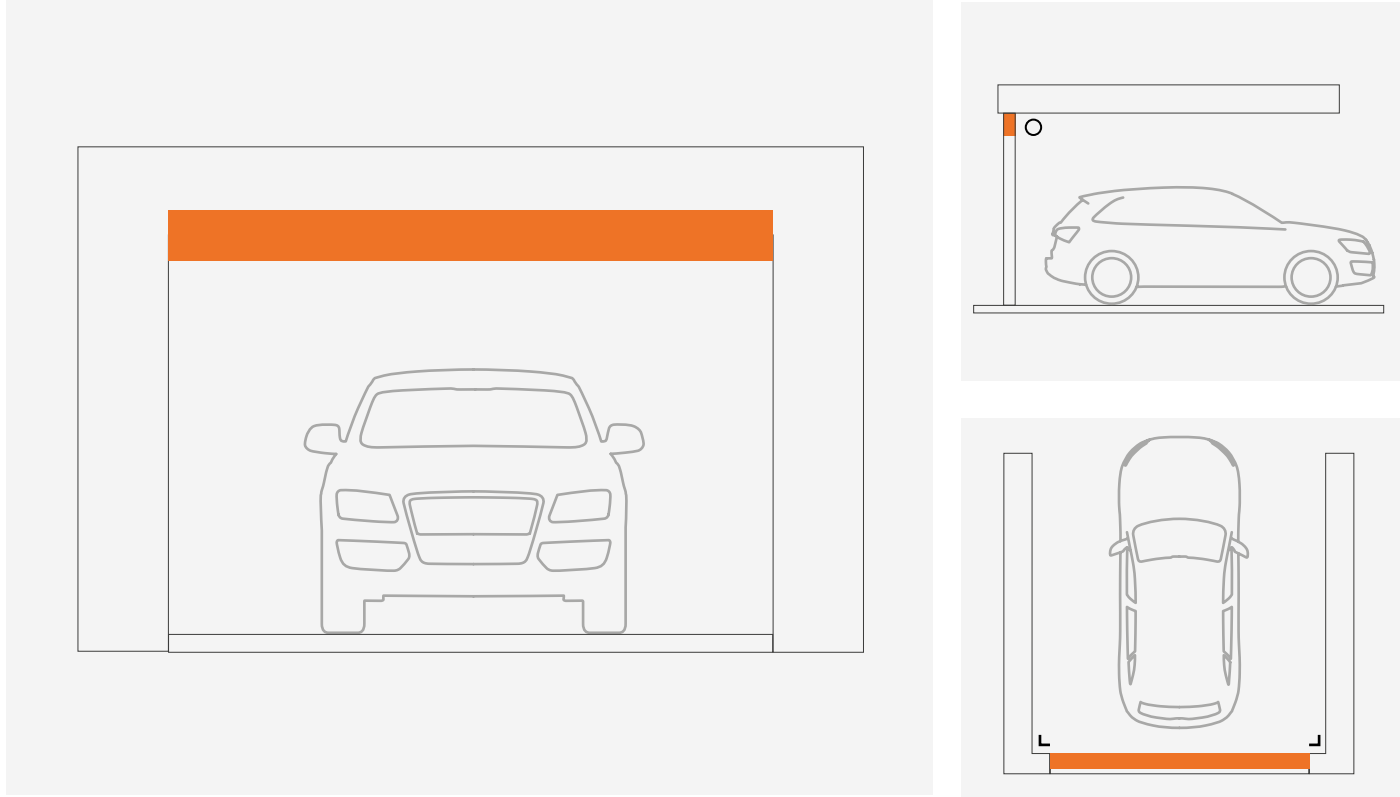

INSTALLATION ONLY OF JAMB PROFILES (IN THE OPENING)

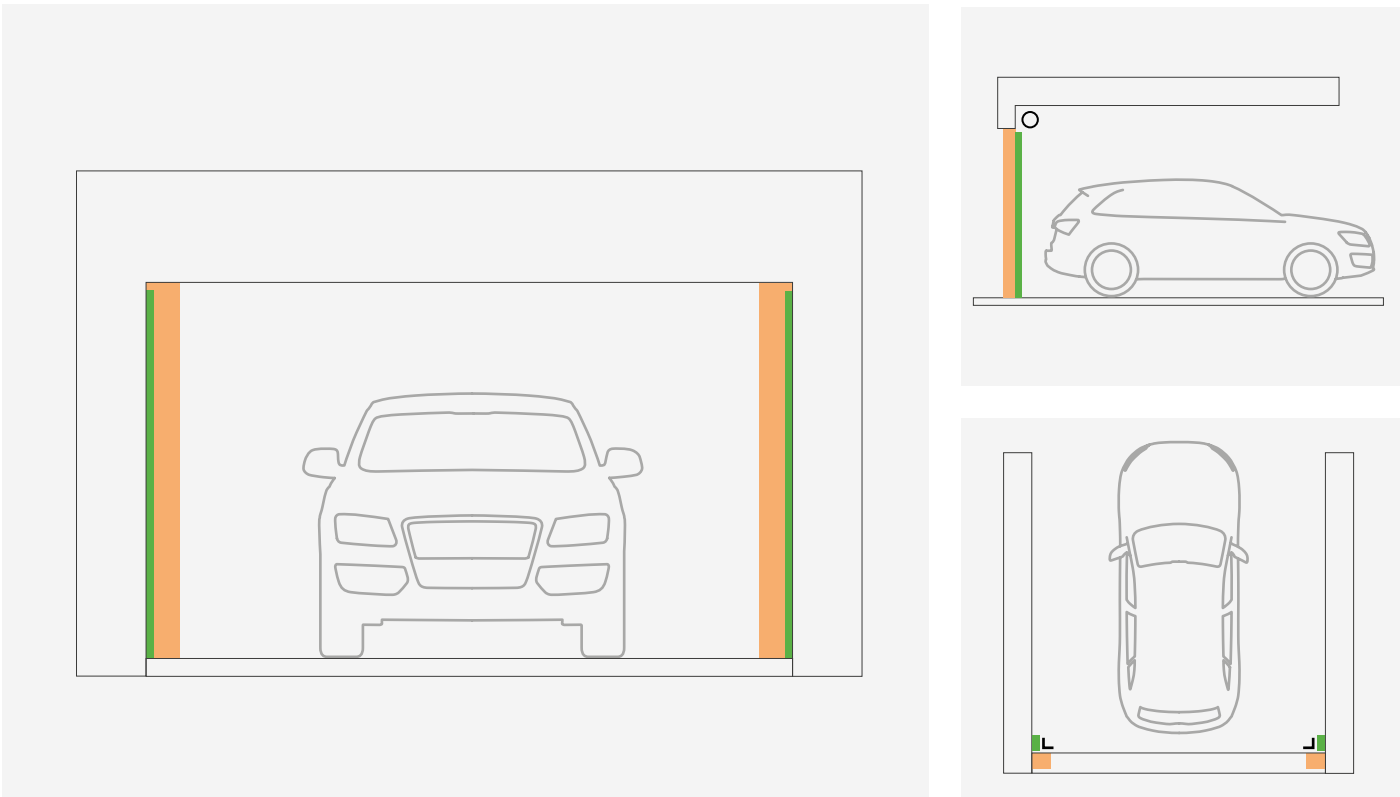




GO-LIGHT*: It lights up your entrance when it is darkest, letting you come in safely and conveniently.

We have always dreamt of coming home to a light that banishes the dark of the night.
GO-LIGHT* The most powerful built-in LED perimeter system you've ever seen in a sectional door.
Minimal in size, only 8 mm thick, a blade of natural white light bursts forth with a high light power (4000-4500 K), together with a low energy consumption (9,6 W/m).
24 V system with top quality long-lasting LEDs.
Perfect light, a joy to the eyes.


TECHNICAL SPECIFICATIONS



The long-life LEDs guarantee a long period of use.

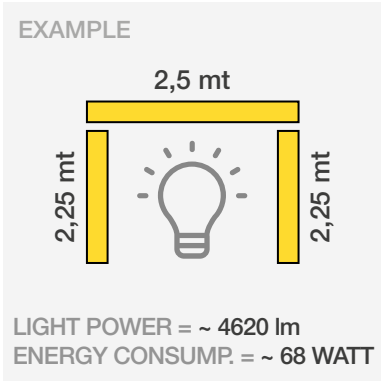

220 V eco green power with energy saving LEDs

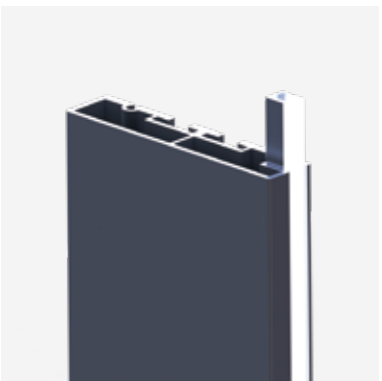

Simplified installation thanks to GO-XFRAME



GO-LIGHT* UP-MODE

Illumination coming from the architrave for an oblique soft light.






GO-LIGHT* SIDE-MODE

Illumination coming from the side jambs for a strong, effective light.



GO-LIGHT* AREA-MODE

Illumination coming from the architrave and from the side jambs for an exciting bright light.

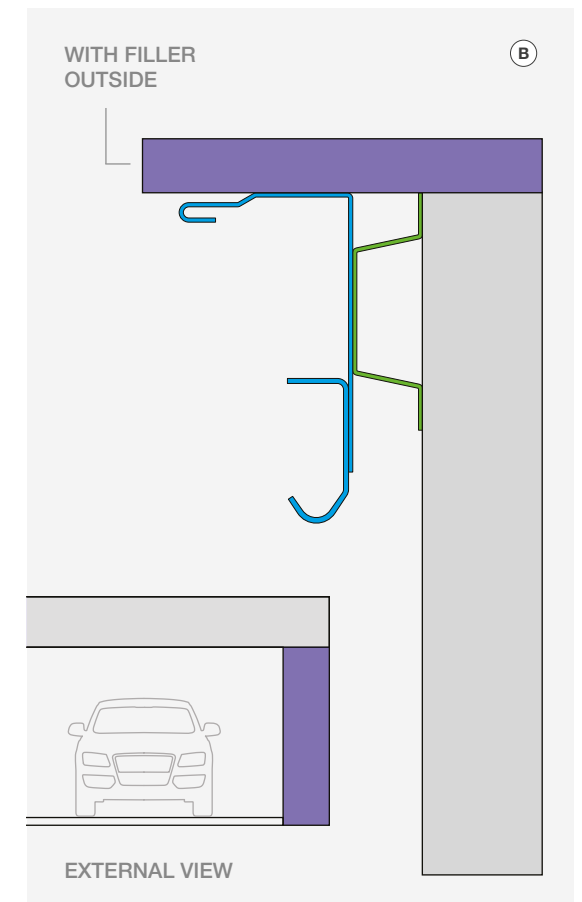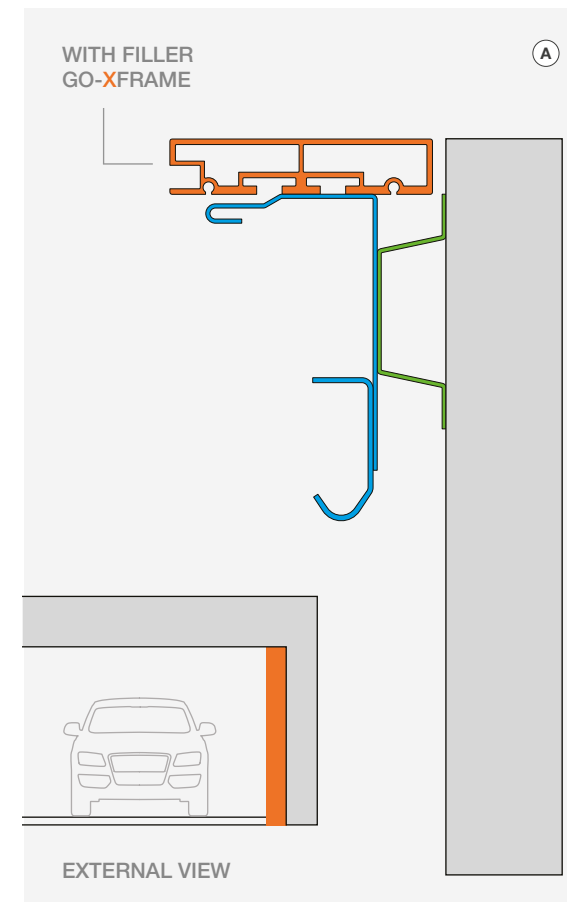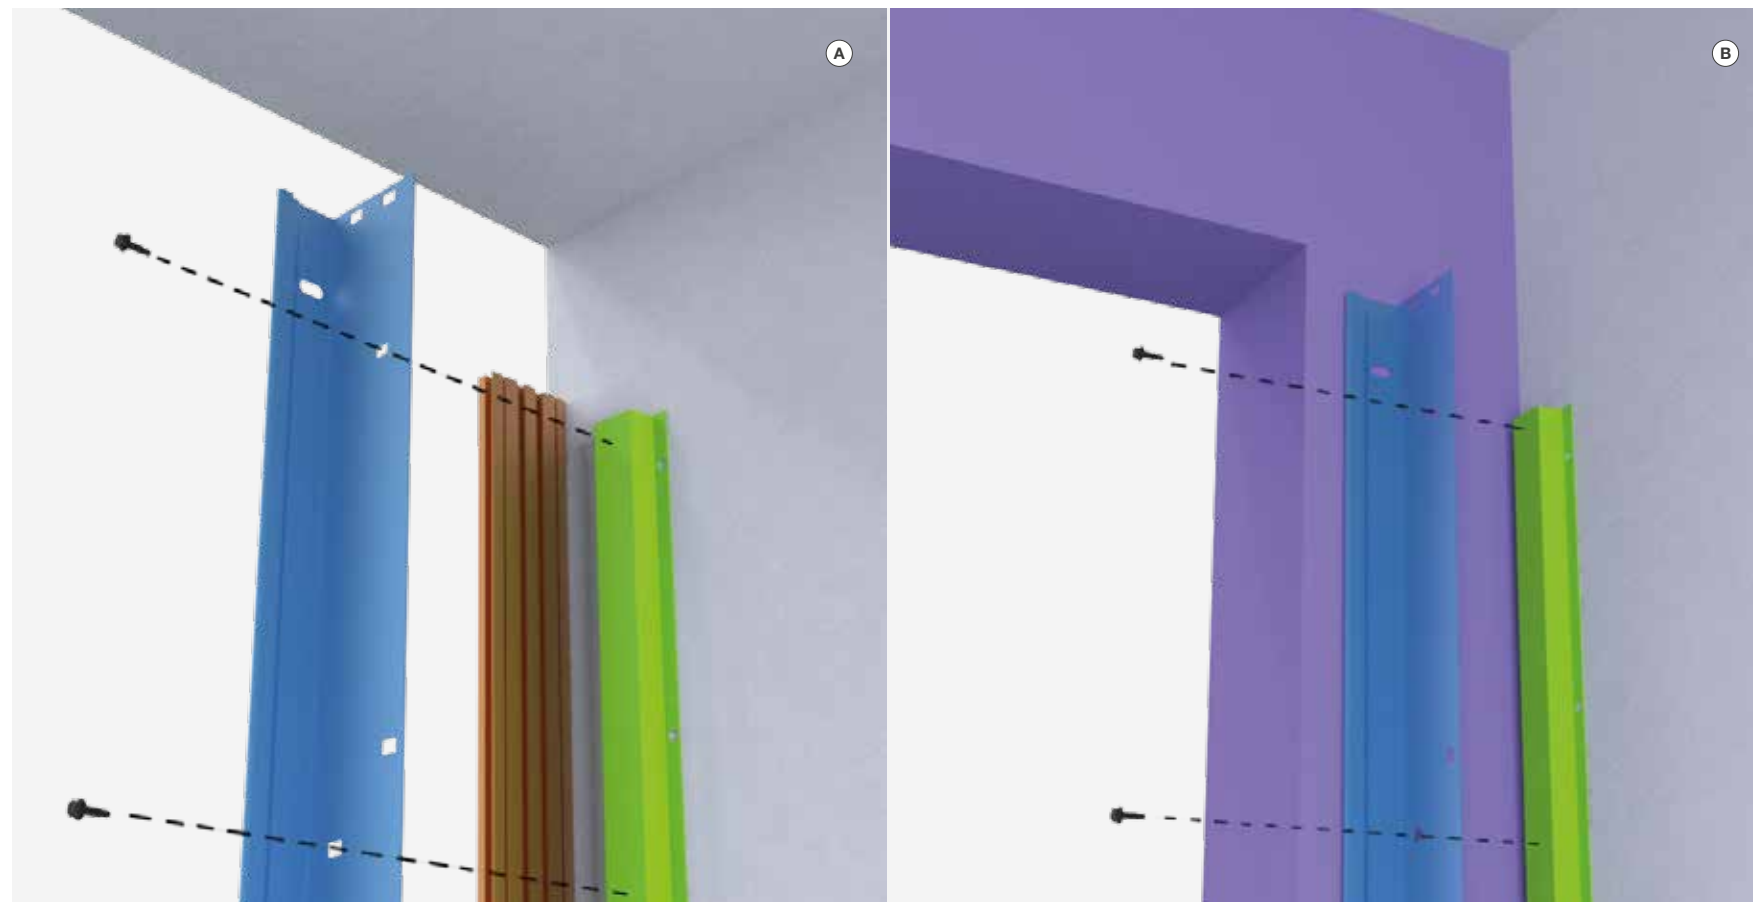


The side attachment that didn't exist!

Let's introduce GO-SIDEFIX! A new way of attaching the mechanism of your residential door. Thanks to this kit, it is possible to anchor it on the side by making use of load-bearing walls in situations where front jambs are not suitable. Easy and versatile! Just fix and make level the sturdy pre-drilled galvanised steel profile (15/10 thick) on the side wall (the profile can also be split and arranged as necessary to accommodate shapes or similar) to create the support base to which the rails/vertical angle bracket group can be joined using the relevant screws contained in the kit.


Its reduced size avoids reducing the clear passage height of the door, retaining the standard situation of 100 mm jamb. The Omega section of the profiles ensures strength and ease of assembly, retaining lightness and providing support for fixing the rails and practical space for cables or wiring to pass through.

Designed to be combined with the GO-XFRAME, at the same time its versatility makes it the perfect solution for other types of installation: jambs not suitable for front attachment - jambs with filler qualities - non-structural jambs. Practical and fast!


FOCUS



① Zinc-coating plus



② Usable cable passage space



③ Ease of assembly


ADAPTABLE

The Omega profile can be cut in situations where there are obstacles present



MODEST SIZES

Only 25 mm overall size

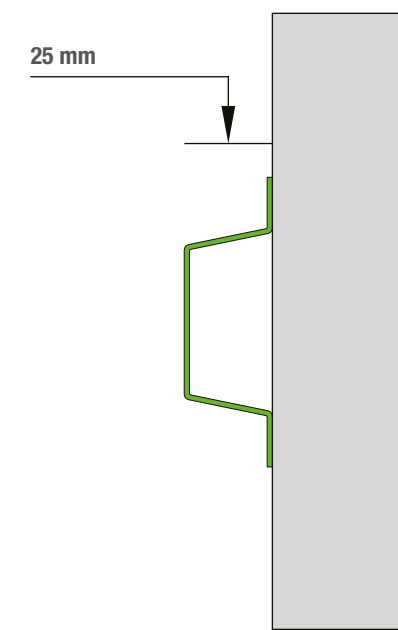

2 COMPLETE KITS



With Omega pieces and screws for doors of heights up to 3500

KIT SIDEFIX 1

2 x 2.5 mt profiles and bag of screws (12 screws)

KIT SIDEFIX 2

3 x 2.5 mt profiles and bag of screws (12 screws)

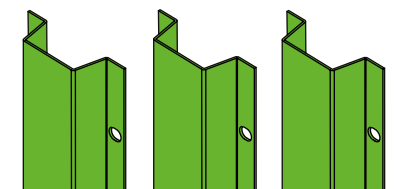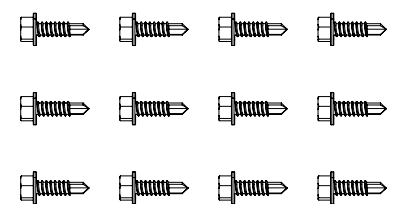

INDUSTRIAL SECTIONAL DOORS



PIANO

Minimalist forms that integrate into any industrial building, especially suited to modern spaces.



FINISHES

Smooth

Embossed wood

PVC smooth film-coated

Smooth prepainted

WINDOWS

Goblò

Go-Vision

Panoramic

ARCHITRAVES AND SLIDING MECHANISMS

GI300NF

GI350NF

GI450NF

GI520NF

GI990HF

GIH+600VF

SIMILAR RAL COLOURS

9016 Poly *

1013

7035

7040

9002

9006

6005

3003

6009

5010

8014

7016 Poly PMD *

7016 Sandgrain

Golden Oak PVC

Dark Oak PVC

V-Golden Prev.

V-Dark Prev.

Other Colours page 215

PEDESTRIAN DOOR

Also available with pedestrian door
GO-LEVEL / GO-STEP

*** Note:** The long-lasting surface coating on the POLYGRAIN panels (Poly similar RAL 9016 and Poly similar RAL 7016) has a shimmering finish, which changes depending on the angle you look at it from and the light shining on it. The colour is not uniform as on other types of panel. Therefore, any subtle or more significant shades and tones should not be considered a defect on the panel, rather an integral part of its finish.

Note: CAME GO uses the SIMILAR RAL colour range. The SIMILAR RAL colour tones in the catalogue and other CAME GO documents and promotional material are approximate and should be considered as an indication of the colour shade. The finished product colour may differ in tone, shade and brightness with respect to the SIMILAR RAL sample.



DOGATO

Wide, horizontal staves
to add aesthetic value to
both traditional and modern
architecture.



FINISHES


Smooth


Embossed wood


PVC smooth film-coated

Smooth prepainted

WINDOWS

Goblò

Go-Vision

Panoramic

ARCHITRAVES AND SLIDING MECHANISMS

GI300NF

GI350NF

GI450NF

GI520NF

GI990HF

GIH+600VF

SIMILAR RAL COLOURS

9016 Poly *

1013

7035

7040

9002

9006

6005

3003

6009

5010

8014

7016 Poly PMD *

7016 Sandgrain

Golden Oak PVC

Dark Oak PVC

V-Golden Prev.

V-Dark Prev.

Other Colours

Other Colours
page 215

PEDESTRIAN DOOR


Also available with pedestrian door
GO-LEVEL / GO-STEP

*** Note:** The long-lasting surface coating on the POLYGRAIN panels (Poly similar RAL 9016 and Poly similar RAL 7016) has a shimmering finish, which changes depending on the angle you look at it from and the light shining on it. The colour is not uniform as on other types of panel. Therefore, any subtle or more significant shades and tones should not be considered a defect on the panel, rather an integral part of its finish.


Note: CAME GO uses the SIMILAR RAL colour range. The SIMILAR RAL colour tones in the catalogue and other CAME GO documents and promotional material are approximate and should be considered as an indication of the colour shade. The finished product colour may differ in tone, shade and brightness with respect to the SIMILAR RAL sample.

RIGATO


Perfectly practical and versatile in any context, it is highly customisable thanks to a vast range of colours and finishes.




FINISHES



WINDOWS

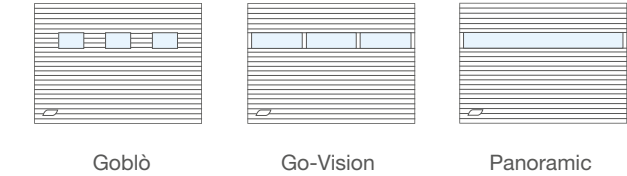

SIMILAR RAL COLOURS

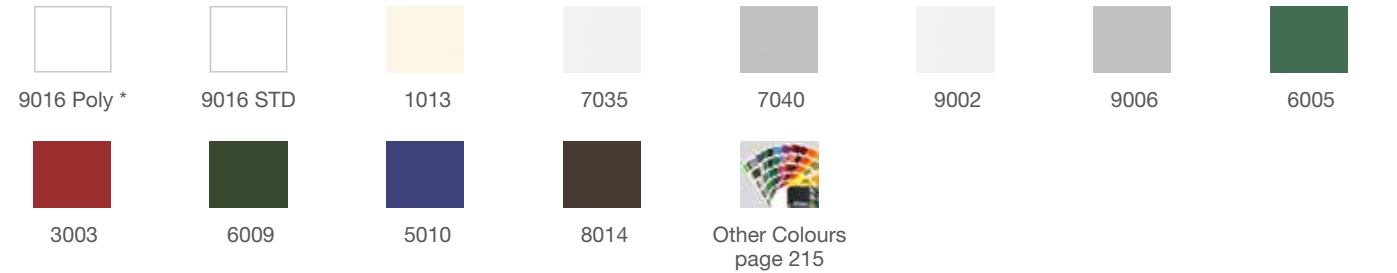

ARCHITRAVES AND SLIDING MECHANISMS



PEDESTRIAN DOOR

Also available with pedestrian door
GO-LEVEL / GO-STEP


*** Note:** The long-lasting surface coating on the POLYGRAIN panels (Poly similar RAL 9016 and Poly similar RAL 7016) has a shimmering finish, which changes depending on the angle you look at it from and the light shining on it. The colour is not uniform as on other types of panel. Therefore, any subtle or more significant shades and tones should not be considered a defect on the panel, rather an integral part of its finish.

Note: CAME GO uses the SIMILAR RAL colour range. The SIMILAR RAL colour tones in the catalogue and other CAME GO documents and promotional material are approximate and should be considered as an indication of the colour shade. The finished product colour may differ in tone, shade and brightness with respect to the SIMILAR RAL sample.



MILLERIGHE

A balance between tradition and innovation, to create a line that is classic but fresh and original, and can be adapted to suit any building.



FINISHES



Millerighe


WINDOWS



Goblò



Go-Vision



Panoramic

SIMILAR RAL COLOURS



9006

ARCHITRAVES AND SLIDING MECHANISMS



GI300NF



GI350NF



GI450NF



GI520NF



GI990HF



GIH+600VF


PEDESTRIAN DOOR

Also available with pedestrian door
GO-LEVEL / GO-STEP



SCENARIO

A practical and versatile design for a closing mechanism that meets your needs, including for brightness and ventilation.



GLASS AND MESH FILLERS

 Clear

 Satin

 Opal

 Mesh micro-perforated

 Expanded metal mesh

 Wire mesh

 Alu + MDF Panels

ARCHITRAVES AND SLIDING MECHANISMS

 GI300NF

 GI350NF

 GI450NF

 GI520NF

 GI990HF

 GIH+600VF

COLOUR / FINISHES OF ALUMINIUM PROFILES

 Aluminium Anodised

 White 9016

 Black 9005

 1013

 7035

 7040

 9002

 9006

 6005

 3003

 6009

 5010

 8014

 7016

 Golden Oak

 Dark Oak

 Anthracite

 Other Colours Available


PEDESTRIAN DOOR

Also available with pedestrian door
GO-LEVEL / GO-STEP

Note: CAME GO uses the SIMILAR RAL colour range. The SIMILAR RAL colour tones in the catalogue and other CAME GO documents and promotional material are approximate and should be considered as an indication of the colour shade. The finished product colour may differ in tone, shade and brightness with respect to the SIMILAR RAL sample.

PANORAMIC

The perfect combination of aesthetics, brightness and ventilation in the most demanding industrial contexts.



GLASS AND MESH FILLER


Clear


Satin


Opal


Mesh micro-perforated


Expanded metal mesh


Wire mesh

ARCHITRAVES AND SLIDING MECHANISMS


GI300NF


GI350NF


GI450NF


GI520NF


GI990HF


GIH+600VF

COLOUR / FINISHES OF ALUMINIUM PROFILES


Aluminium Anodised


White 9016


Black 9005


1013


7035


7040


9002


9006


6005


3003


6009


5010


8014


7016


Golden Oak


Dark Oak









Anthracite






Other Colours Available

Note: CAME GO uses the SIMILAR RAL colour range. The SIMILAR RAL colour tones in the catalogue and other CAME GO documents and promotional material are approximate and should be considered as an indication of the colour shade. The finished product colour may differ in tone, shade and brightness with respect to the SIMILAR RAL sample.



**INDUSTRIAL
DOORS:
TECHNICAL
INFORMATION**

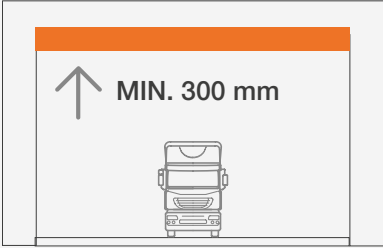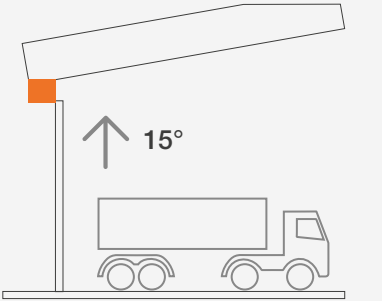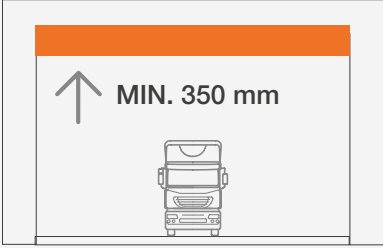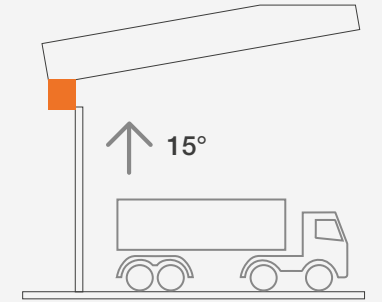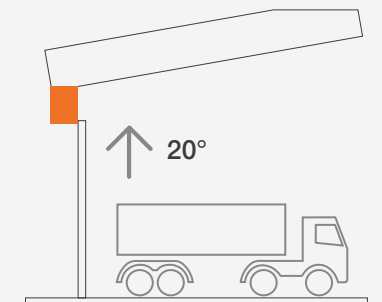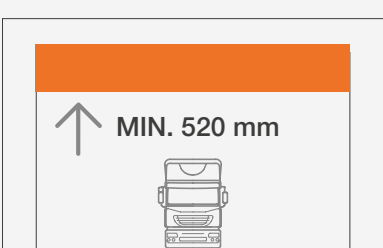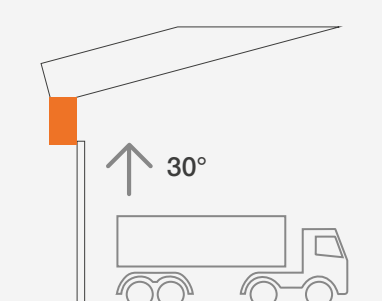AVAILABLE ARCHITRAVE	ROOF INCLINATION	MODEL
		GI300NF Horizontal double track sliding mechanism. Architrave 300 mm - Roof inclination max. 15°
		GI350NF Horizontal double track sliding mechanism. Architrave 350 mm - Roof inclination max. 15°
		GI450NF Horizontal single track sliding mechanism. Architrave 450 mm - Roof inclination max. 20°
		GI520NF Horizontal single track sliding mechanism. Architrave 520 mm - Roof inclination max. 30°

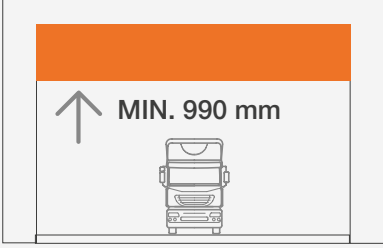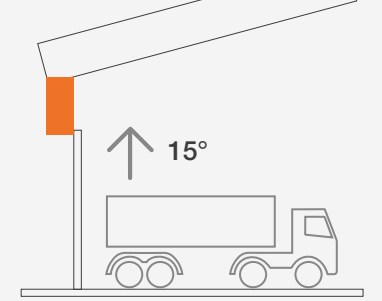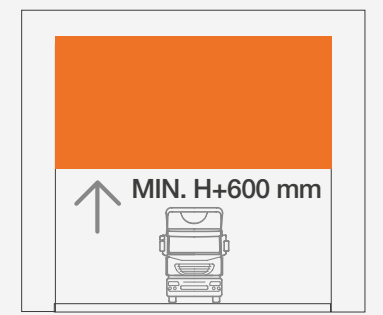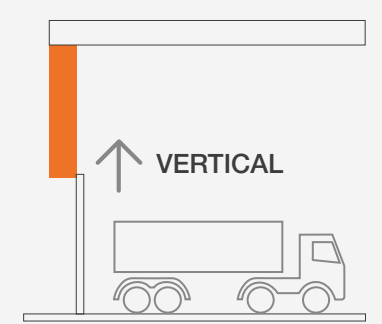AVAILABLE ARCHITRAVE	ROOF INCLINATION	MODEL
		GI990HF Semi-vertical single track sliding mechanism. Architrave 990 mm - Roof inclination max. 15°
		GIH+600VF Vertical single track sliding mechanism. Architrave H+600 mm - No inclination



GI 300 NF - the lowered industrial door for drive operator!

All the features of an industrial door in only 300 mm. The configuration of this sliding mechanism allows the use of drive operator. The ideal solution for small manufacturing units or industrial sites where there is a reduced architrave.



PAINTWORK

A simple touch of personality! Match the tracks and the hinges to the colour of the inner form with RAL 9016 powder-coating.

FOCUS



Ⓐ Architrave dimension 300 mm



Ⓑ Cable break safety device as standard



Ⓒ Double track sliding mechanism

OPTIONAL MOTOR KIT


DRIVE OPERATOR

Find out about the GO-MOTION X range and the huge range of accessories on page 180







SIZES AVAILABLE

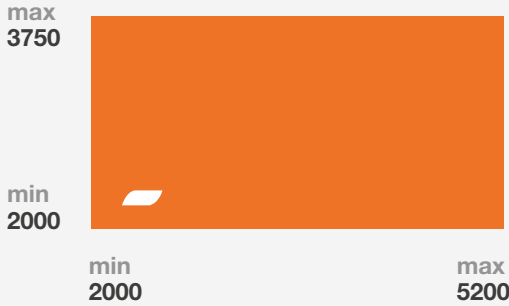

AVAILABLE ARCHITRAVE

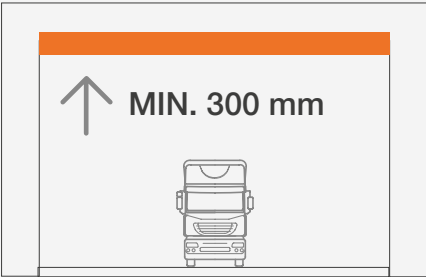

ROOF INCLINATION

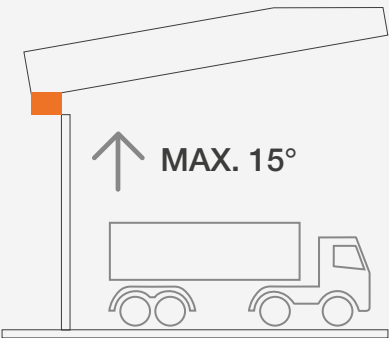

Note: Non-standard measurements available subject to technical feasibility.

MECHANICS

- Pre-assembled torsion spring assembly for available architraves, minimum 300mm.
- Sized for 15,000 cycles (1 cycle = 1 opening + 1 closing motion)
- Sliding mechanism in hot-dip galvanised steel with galvanised edges (maximum oxidation protection).
- Ball-bearing sliding components with side shielding for maximum protection against dust and water.


FORM

- Pinch-resistant insulation panels, 40 mm thick, in Sendzimir* hot-dip galvanised steel with high-density polyurethane foam core that is self-extinguishing and CFC-free.
- Watertight and windproof EPDM seals.


SAFETY EQUIPMENT

- Safety device against springs break.
- Safety device against cables break.

VIEW FROM THE SIDE

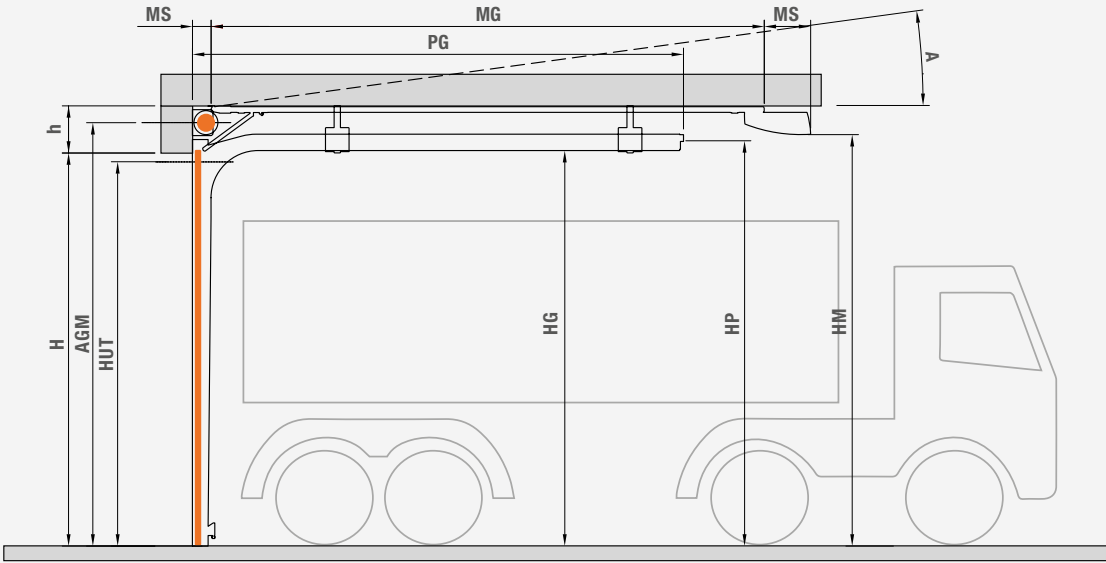

VIEW FROM ABOVE

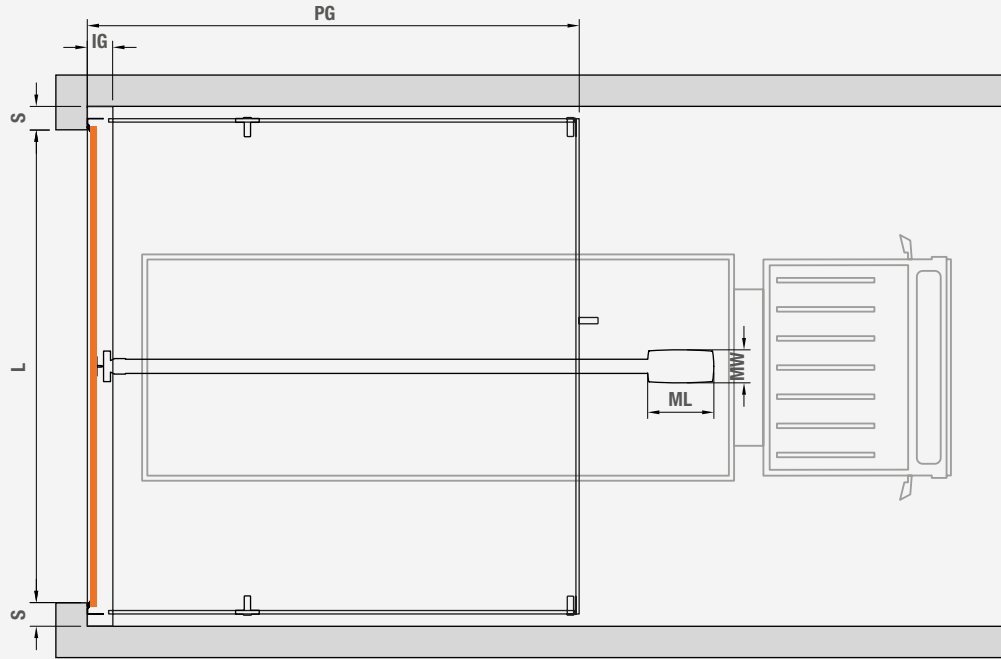

ABBREVIATION	MEANING
H	HEIGHT OF OPENING
h	300 MINIMUM ARCHITRAVE
PG	H + 624 SLIDING MECHANISM OVERALL SIZE
HUT *	H - 56 USEFUL PASSING HEIGHT
HG	H + 15 TRACK HEIGHT FROM GROUND
HM	H + 117 MOTOR HEIGHT FROM GROUND
HP	H + 73 END CROSS PIECE HEIGHT FROM GROUND
AGM	H + 193 SPRING GROUP AXLE POSITION
PT	MA + MG + MS TOTAL DEPTH WITH MOTOR

ABBREVIATION	MEANING
A	15° MAXIMUM INCLINATION OF RAILS
IG	172 SPRING GROUP OVERALL SIZE
L	WIDTH OF OPENING
S	MIN. 150 LATERAL SPACE
ML	MAX 450 MOTOR LENGTH OVERALL SIZE
MW	MAX 215 MOTOR WIDTH OVERALL SIZE
MA	119 DRIVE TRACK ATTACHMENT**
MS	295 MAX DRIVE PROJECTION*
MG	DRIVE TRACK LENGTH

* **Note:** Data valid where no GO-LEVEL / GO-STEP pedestrian door



GI 350 NF - The lowered industrial door with lateral operator!

The industrial door with lateral operator that takes up only 350 mm. Better movement performances, together with size benefits that allow its installation in industrial sites with reduced architrave. Recommended for small factories, warehouses and laboratories.



PAINTWORK

A simple touch of personality! Match the tracks and the hinges to the colour of the inner form with RAL 9016 powder-coating.

FOCUS



Ⓐ Architrave dimension 350 mm



Ⓑ Cable break safety device as standard



Ⓒ Double track sliding mechanism



Ⓓ Spring group increased as standard

OPTIONAL MOTOR KIT

AUTOMATED AT SIDE

Find out about the GO-MOTION X range and the huge range of accessories on page 181







SIZES AVAILABLE



AVAILABLE ARCHITRAVE

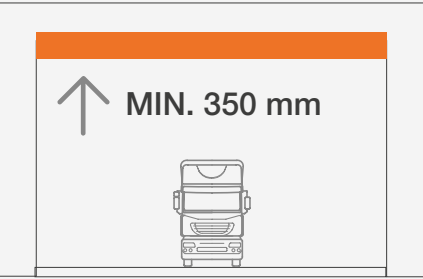

ROOF INCLINATION

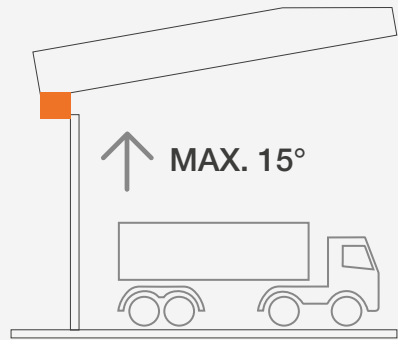

Note: Non-standard measurements available subject to technical feasibility.

MECHANICS

- Pre-assembled torsion spring assembly for available architraves, minimum 350mm.
- Sized for 25,000 cycles (1 cycle = 1 opening + 1 closing motion).
- Sliding mechanism in hot-dip galvanised steel with galvanised edges (maximum oxidation protection).
- Ball-bearing sliding components with side shielding for maximum protection against dust and water.


FORM

- Pinch-resistant insulation panels, 40 mm thick, in Sendzimir* hot-dip galvanised steel with high-density polyurethane foam core that is self-extinguishing and CFC-free.
- Watertight and windproof EPDM seals.


SAFETY EQUIPMENT

- Safety device against springs break.
- Safety device against cables break.

VIEW FROM THE SIDE

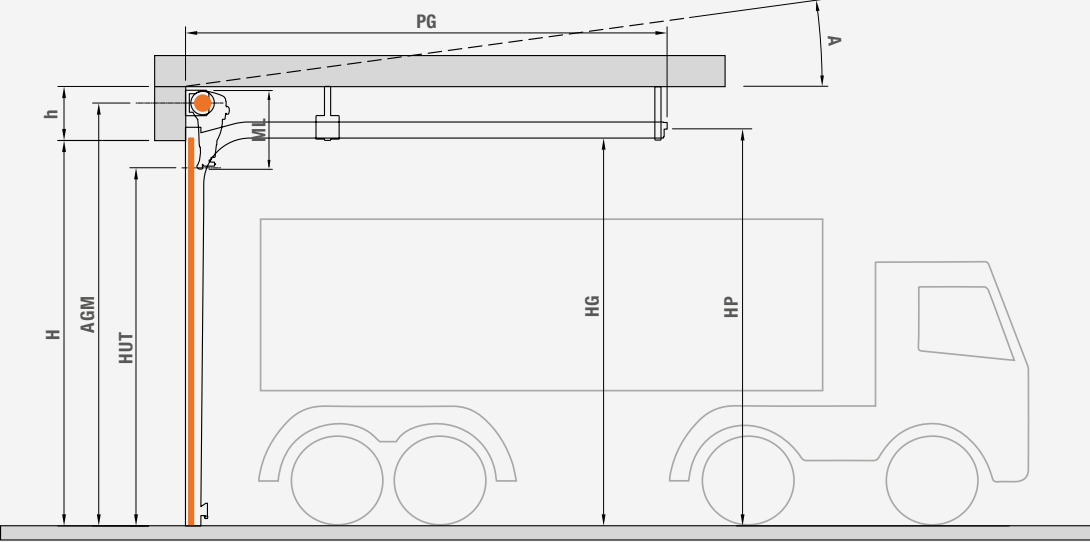

VIEW FROM ABOVE

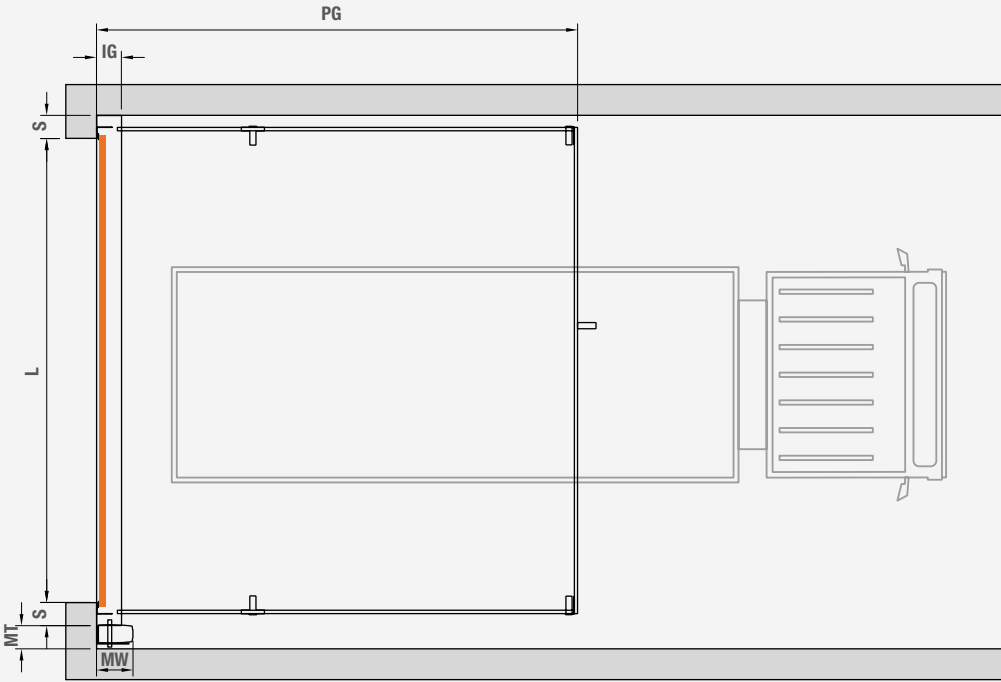

ABBREVIATION	MEANING
H	HEIGHT OF OPENING
h	350 MINIMUM ARCHITRAVE
PG	H + 624 SLIDING MECHANISM OVERALL SIZE
HUT *	H - 177 USEFUL PASSING HEIGHT
HG	H + 15 TRACK HEIGHT FROM GROUND
HP	H + 73 END CROSS PIECE HEIGHT FROM GROUND
AGM	H + 243 SPRING GROUP AXLE POSITION

ABBREVIATION	MEANING
A	15° MAXIMUM INCLINATION OF RAILS
IG	172 SPRING GROUP OVERALL SIZE
L	WIDTH OF OPENING
S	MIN. 150 LATERAL SPACE
ML	MAX 450 MOTOR LENGTH OVERALL SIZE
MW	MAX 215 MOTOR WIDTH OVERALL SIZE
MT	MIN. 150 MOTOR SIDE OVERALL SIZE

* **Note:** Data valid where no GO-LEVEL / GO-STEP pedestrian door



GI 450 NF - The versatile industrial door!

More compact spring group to allow the installation of a standard industrial sliding mechanism in only 450 mm. A much sought-after solution for using in existing sites or to accommodate building requirements during planning or in the course of the works.



PAINTWORK

A simple touch of personality! Match the tracks and the hinges to the colour of the inner form with RAL 9016 powder-coating.



IRON VERSION

IRON, the industrial solution without a spring group. A useful solution that lets you make savings on installation works and in particular maintenance. It is particularly suited to large doors.

Find out about IRON on page 148

FOCUS



Ⓐ Architrave dimension
450 mm



Ⓑ Cable break safety
device as standard



Ⓒ Single track sliding
mechanism

OPTIONAL MOTOR KIT

AUTOMATED AT SIDE
Find out about the GO-MOTION X range and the huge range of accessories on page 181







SIZES AVAILABLE



AVAILABLE ARCHITRAVE

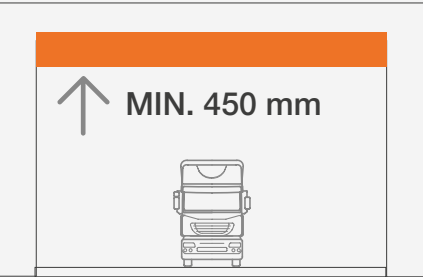

ROOF INCLINATION

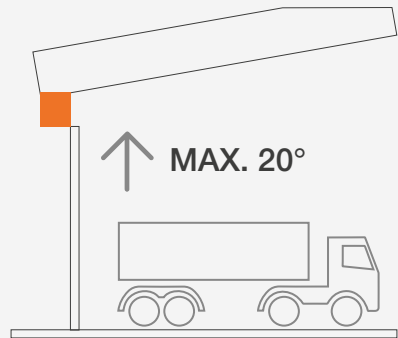

Note: Non-standard measurements available subject to technical feasibility.

MECHANICS

- Pre-assembled torsion spring assembly for available architraves, minimum 450mm.
- Sized for 25,000 cycles (1 cycle = 1 opening + 1 closing motion).
- Sliding mechanism in hot-dip galvanised steel with galvanised edges (maximum oxidation protection)
- Ball-bearing sliding components with side shielding for maximum protection against dust and water.


FORM

- Pinch-resistant insulation panels, 40 mm thick, in Sendzimir* hot-dip galvanised steel with high-density polyurethane foam core that is self-extinguishing and CFC-free.
- Watertight and windproof EPDM seals.


SAFETY EQUIPMENT

- Safety device against springs break.
- Safety device against cables break.

VIEW FROM THE SIDE

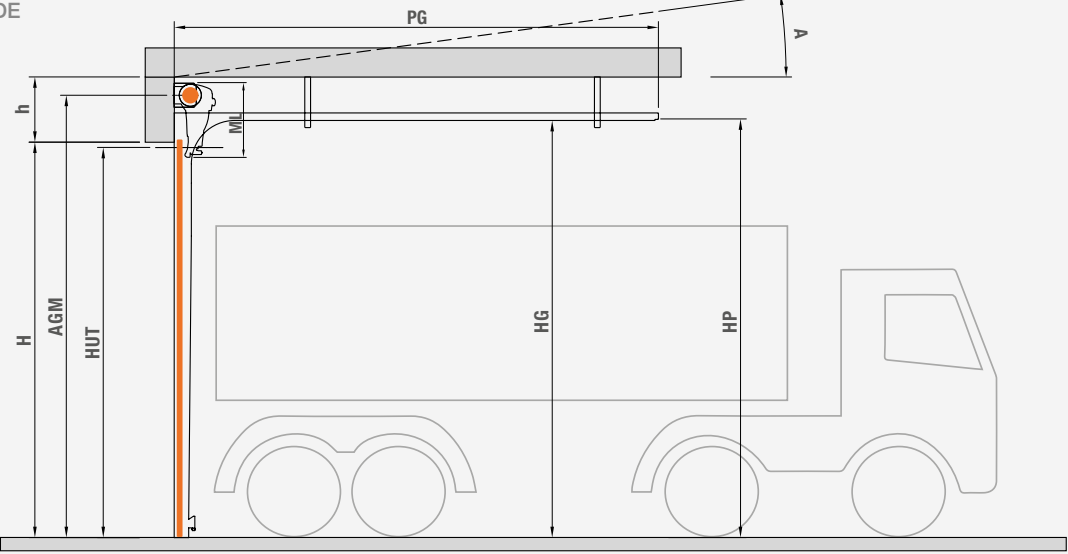

VIEW FROM ABOVE

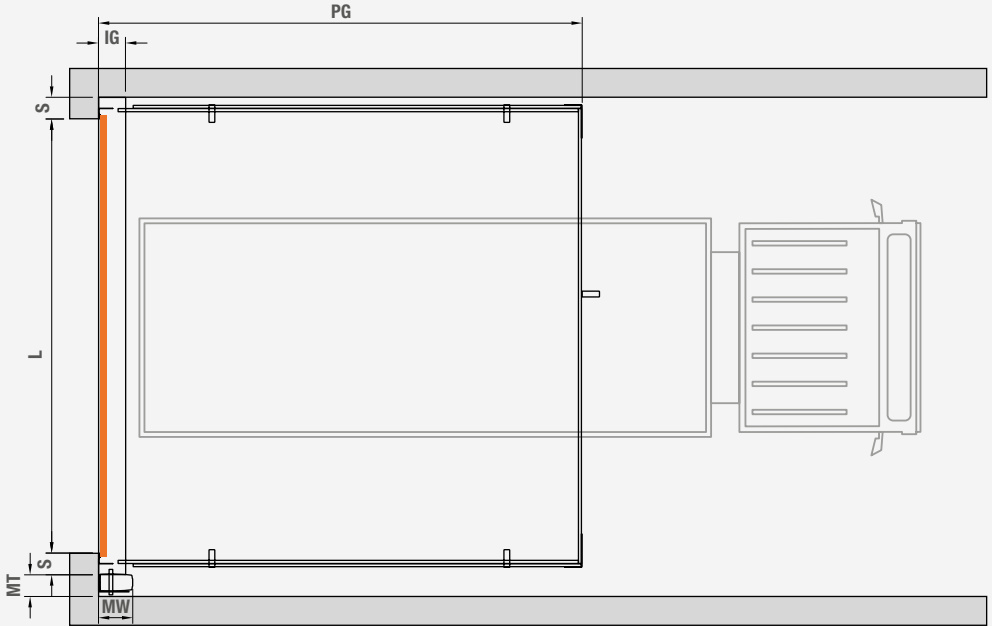

ABBREVIATION	MEANING
H	HEIGHT OF OPENING
h	450 MINIMUM ARCHITRAVE
PG	H + 615 SLIDING MECHANISM OVERALL SIZE
HUT *	H - 37 USEFUL PASSING HEIGHT
HG	H + 149 TRACK HEIGHT FROM GROUND
HP	H + 157 END CROSS PIECE HEIGHT FROM GROUND
AGM	H + 324 SPRING GROUP AXLE POSITION

ABBREVIATION	MEANING
A	20° MAXIMUM INCLINATION OF RAILS (*)
IG	187 SPRING GROUP OVERALL SIZE
L	WIDTH OF OPENING
S	MIN. 150 LATERAL SPACE
ML	MAX 505 MOTOR LENGTH OVERALL SIZE
MW	MAX 240 MOTOR WIDTH OVERALL SIZE
MT	MIN. 150 MOTOR SIDE OVERALL SIZE

* **Note:** Data valid where no GO-LEVEL / GO-STEP pedestrian door

Note (*) The maximum incline that can be achieved can go up to 30° with prior check by the CAME GO technical office



GI 520 NF - the benchmark industrial sliding mechanism.

Its configuration with 520 mm architrave makes it the most sought-after industrial standard. The option of adding an increased spring group makes it a tireless partner in its work. Perfect for factories, warehouses, depots, and all industrial uses.



PAINTWORK

A simple touch of personality! Match the tracks and the hinges to the colour of the inner form with RAL 9016 powder-coating.



IRON VERSION

IRON, the industrial solution without a spring group. A useful solution that lets you make savings on installation works and in particular maintenance. It is particularly suited to large doors.

Find out about IRON on page 148

FOCUS



Ⓐ Architrave dimension 520 mm



Ⓑ Cable break safety device as standard



Ⓒ Single track sliding mechanism



Ⓓ Spring group increased as standard

OPTIONAL MOTOR KIT


AUTOMATED AT SIDE

Find out about the GO-MOTION X range and the huge range of accessories on page 181






SIZES AVAILABLE

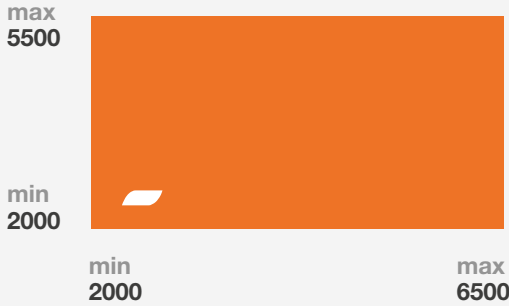

AVAILABLE ARCHITRAVE



ROOF INCLINATION

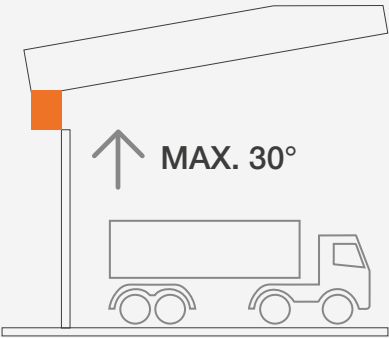

Note: Non-standard measurements available subject to technical feasibility.

MECHANICS

- Pre-assembled torsion spring assembly for available architraves, minimum 520mm.
- Sized for 25,000 cycles (1 cycle = 1 opening + 1 closing motion).
- Sliding mechanism in hot-dip galvanised steel with galvanised edges (maximum oxidation protection)
- Ball-bearing sliding components with side shielding for maximum protection against dust and water.


FORM

- Pinch-resistant insulation panels, 40 mm thick, in Sendzimir* hot-dip galvanised steel with high-density polyurethane foam core that is self-extinguishing and CFC-free.
- Watertight and windproof EPDM seals.


SAFETY EQUIPMENT

- Safety device against springs break.
- Safety device against cables break.

VIEW FROM THE SIDE

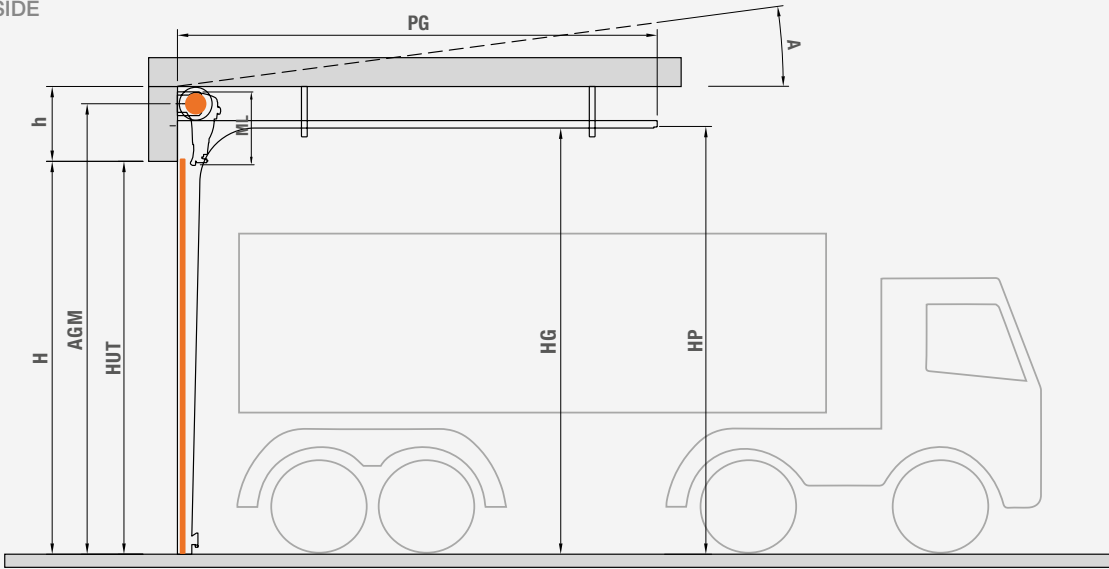


VIEW FROM ABOVE

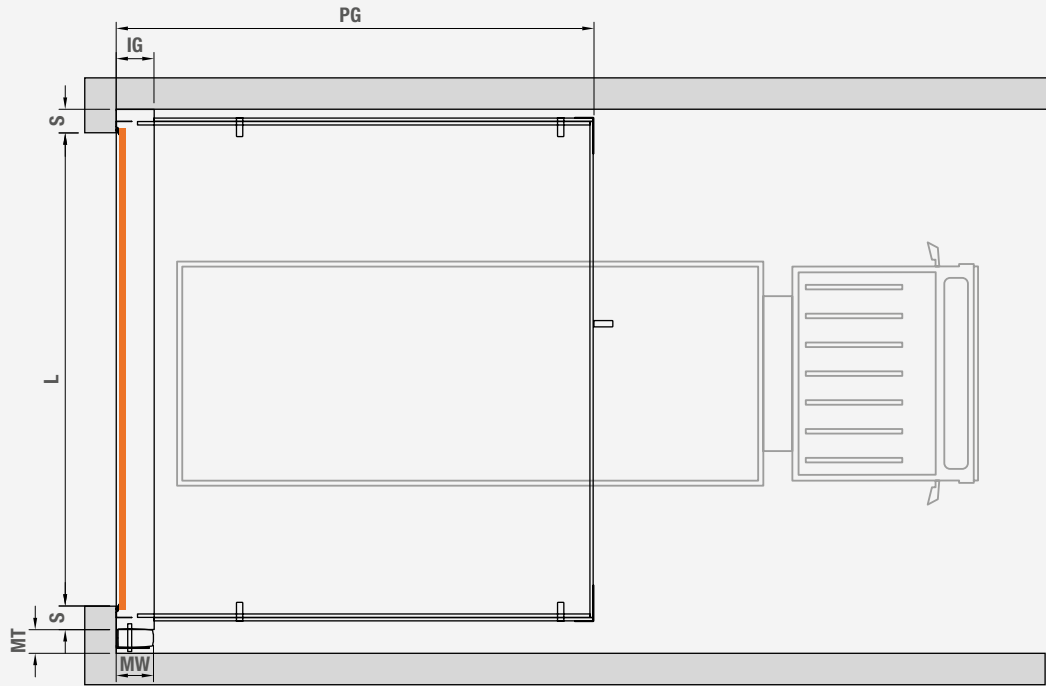

ABBREVIATION	MEANING
H	HEIGHT OF OPENING
h	520 MINIMUM ARCHITRAVE
PG	H + 605 SLIDING MECHANISM OVERALL SIZE
HUT *	H USEFUL PASSING HEIGHT
HG	H + 231 TRACK HEIGHT FROM GROUND
HP	H + 238 END CROSS PIECE HEIGHT FROM GROUND
AGM	H + 400 SPRING GROUP AXLE POSITION

ABBREVIATION	MEANING
A	30° MAXIMUM INCLINATION OF RAILS
IG	241 SPRING GROUP OVERALL SIZE
L	WIDTH OF OPENING
S	MIN. 150 LATERAL SPACE
ML	MAX 505 MOTOR LENGTH OVERALL SIZE
MW	MAX 240 MOTOR WIDTH OVERALL SIZE
MT	MIN. 150 MOTOR SIDE OVERALL SIZE

* **Note:** Data valid where no GO-LEVEL / GO-STEP pedestrian door

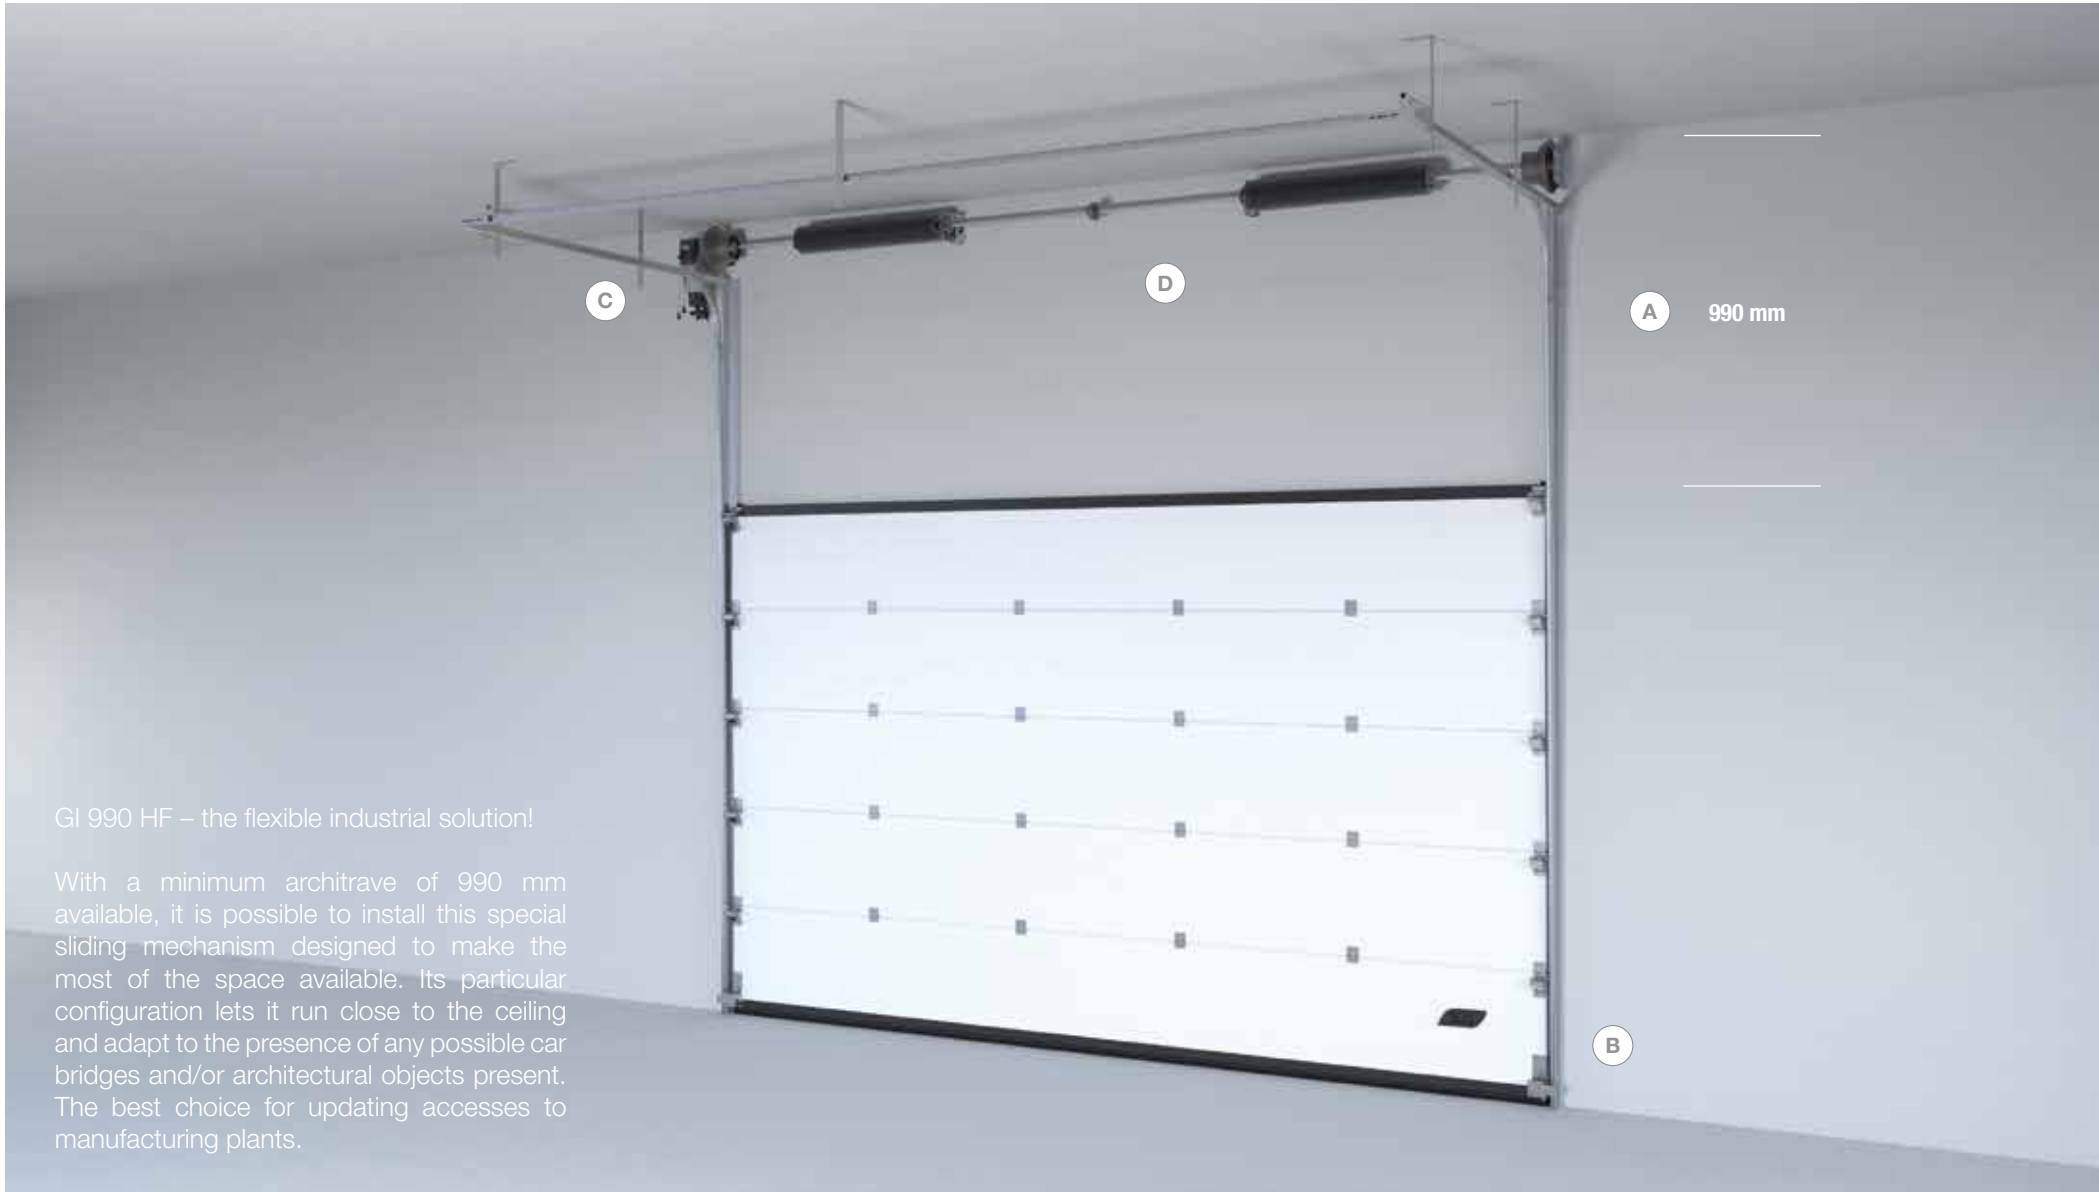

GI 990 HF – the flexible industrial solution!

With a minimum architrave of 990 mm available, it is possible to install this special sliding mechanism designed to make the most of the space available. Its particular configuration lets it run close to the ceiling and adapt to the presence of any possible car bridges and/or architectural objects present. The best choice for updating accesses to manufacturing plants.



PAINTWORK

A simple touch of personality! Match the tracks and the hinges to the colour of the inner form with RAL 9016 powder-coating.



IRON VERSION

IRON, the industrial solution without a spring group. A useful solution that lets you make savings on installation works and in particular maintenance. It is particularly suited to large doors.

Find out about IRON on page 148

FOCUS



Ⓐ Architrave dimension from 990 to 4350 mm



Ⓑ Cable break safety device as standard



Ⓒ Single track sliding mechanism



Ⓓ Adapts to presence of obstacles

OPTIONAL MOTOR KIT

AUTOMATED AT SIDE

Find out about the GO-MOTION X range and the huge range of accessories on page 181







SIZES AVAILABLE



AVAILABLE ARCHITRAVE

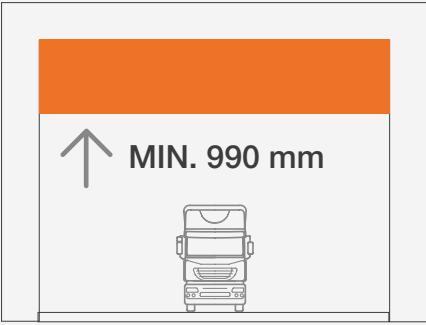

ROOF INCLINATION

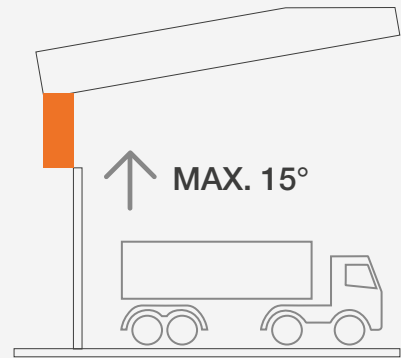

Note: Non-standard measurements available subject to technical feasibility.

MECHANICS

- Pre-assembled torsion spring assembly for available architraves, minimum 990mm.
- Sized for 25,000 cycles (1 cycle = 1 opening + 1 closing motion).
- Sliding mechanism in hot-dip galvanised steel with galvanised edges (maximum oxidation protection)
- Ball-bearing sliding components with side shielding for maximum protection against dust and water.


FORM

- Pinch-resistant insulation panels, 40 mm thick, in Sendzimir* hot-dip galvanised steel with high-density polyurethane foam core that is self-extinguishing and CFC-free.
- Watertight and windproof EPDM seals.


SAFETY EQUIPMENT

- Safety device against springs break.
- Safety device against cables break.

VIEW FROM THE SIDE

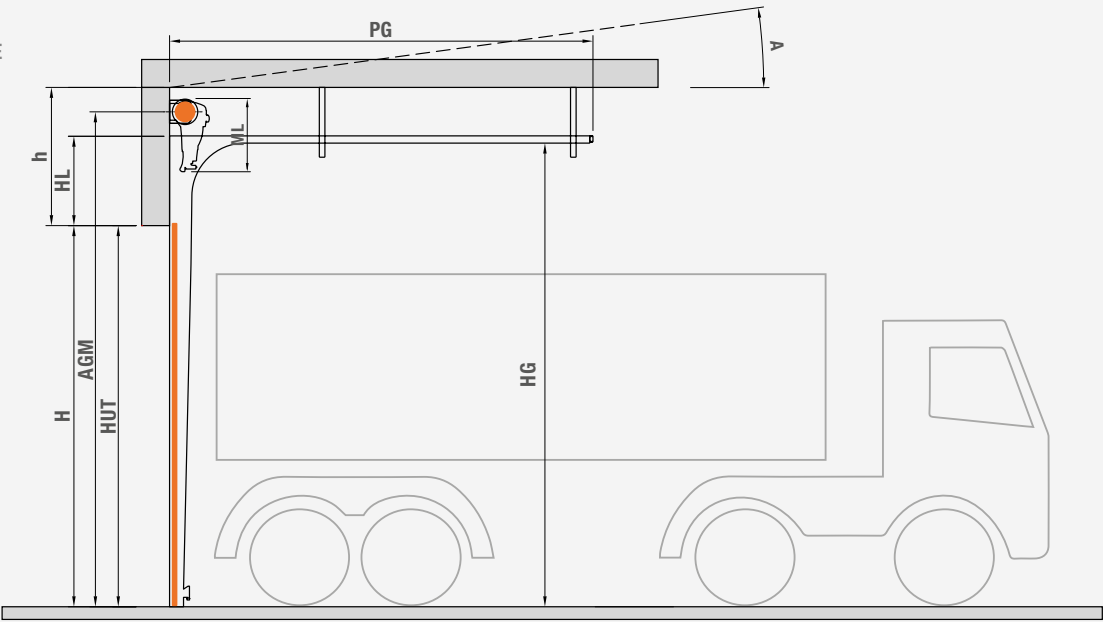

VIEW FROM ABOVE

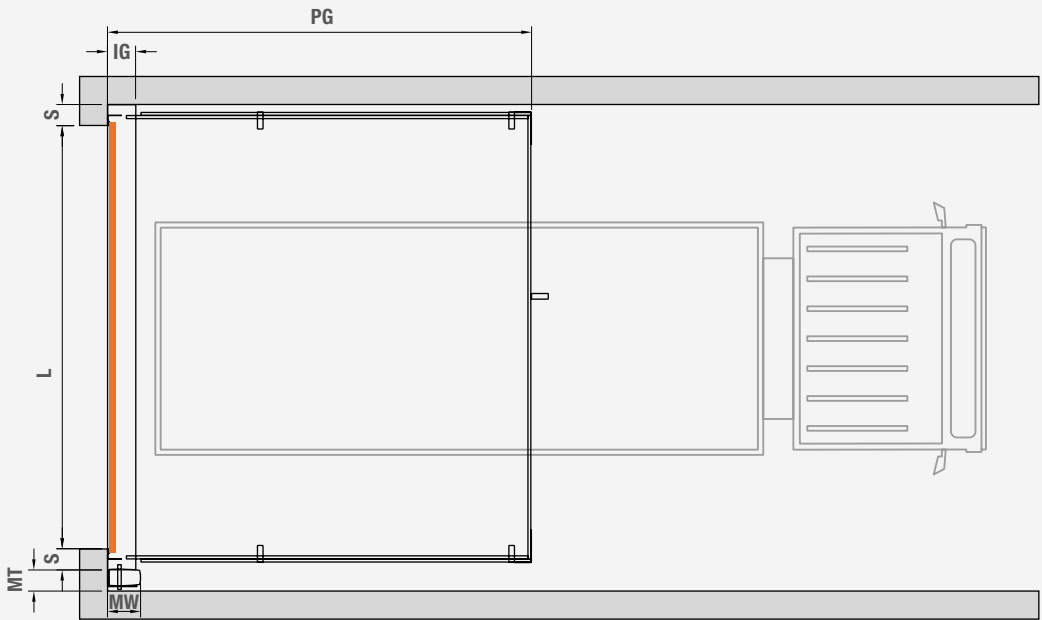

ABBREVIATION	MEANING
H	HEIGHT OF OPENING
h	990 MINIMUM ARCHITRAVE
PG	(H-HL) + 950 SLIDING MECHANISM OVERALL SIZE
HUT *	H USEFUL PASSING HEIGHT
HG	H + HL - 52 TRACK HEIGHT FROM GROUND
HL	h - 350 HIGH-LIFT HEIGHT
AGM	H + HL + 175 SPRING GROUP AXLE POSITION

ABBREVIATION	MEANING
A	15° MAXIMUM INCLINATION OF RAILS (*)
IG	202 SPRING GROUP OVERALL SIZE
L	WIDTH OF OPENING
S	MIN. 150 LATERAL SPACE
ML	MAX 505 MOTOR LENGTH OVERALL SIZE
MW	MAX 240 MOTOR WIDTH OVERALL SIZE
MT	MIN. 150 MOTOR SIDE OVERALL SIZE

* **Note:** Data valid where no GO-LEVEL / GO-STEP pedestrian door

Note (*) The maximum incline that can be achieved can go up to 30° with prior check by the CAME GO technical office



GIH + 600 VF - the unmatched vertical industrial sliding mechanism.

Where there are large architraves it is possible to use this totally vertical sliding mechanism. In this way, the mechanics snug to the wall do not use up the space inside the premises. Excellent in large firms and for goods loading/unloading areas.



PAINTWORK

A simple touch of personality! Match the tracks and the hinges to the colour of the inner form with RAL 9016 powder-coating.




IRON VERSION

IRON, the industrial solution without a spring group. A useful solution that lets you make savings on installation works and in particular maintenance. It is particularly suited to large doors.

Find out about IRON on page 148

FOCUS

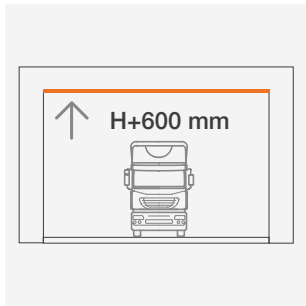


Ⓐ Architrave dimension
H + 600 mm



Ⓑ Cable break safety
device as standard



Ⓒ Standard single track





Ⓓ Sliding mechanism
along the wall

OPTIONAL MOTOR KIT

AUTOMATED AT SIDE

Find out about the GO-MOTION X range and the huge range of accessories on page 181



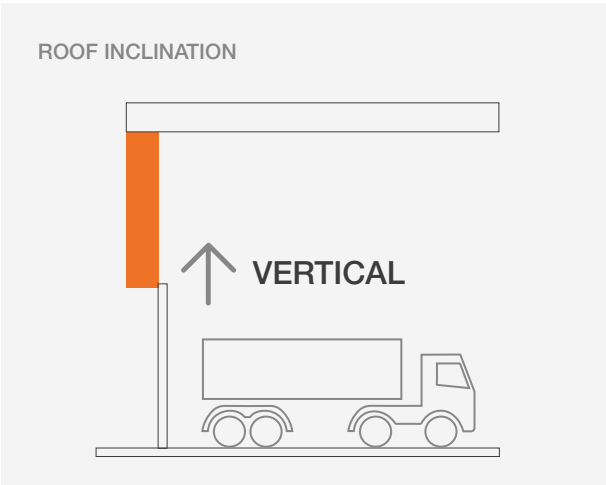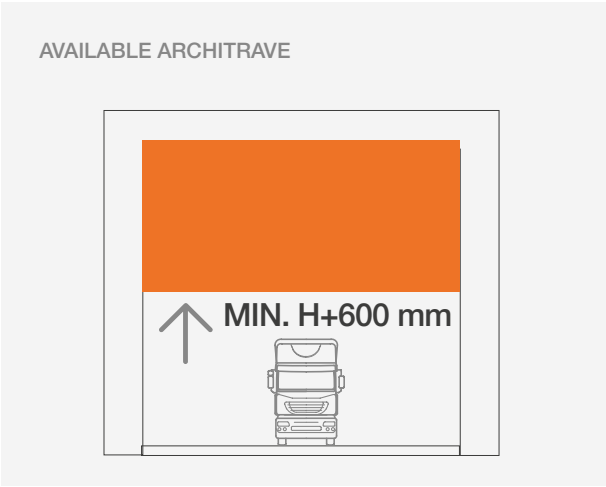

Note: Non-standard measurements available subject to technical feasibility.

MECHANICS



- Pre-assembled torsion spring assembly for available architraves, door height + 600mm
- Sized for 25,000 cycles (1 cycle = 1 opening + 1 closing motion).
- Sliding mechanism in hot-dip galvanised steel with galvanised edges (maximum oxidation protection)
- Ball-bearing sliding components with side shielding for maximum protection against dust and water.

FORM

- Pinch-resistant insulation panels, 40 mm thick, in Sendzimir* hot-dip galvanised steel with high-density polyurethane foam core that is self-extinguishing and CFC-free.
- Watertight and windproof EPDM seals.

SAFETY EQUIPMENT

- Safety device against springs break.
- Safety device against cables break.

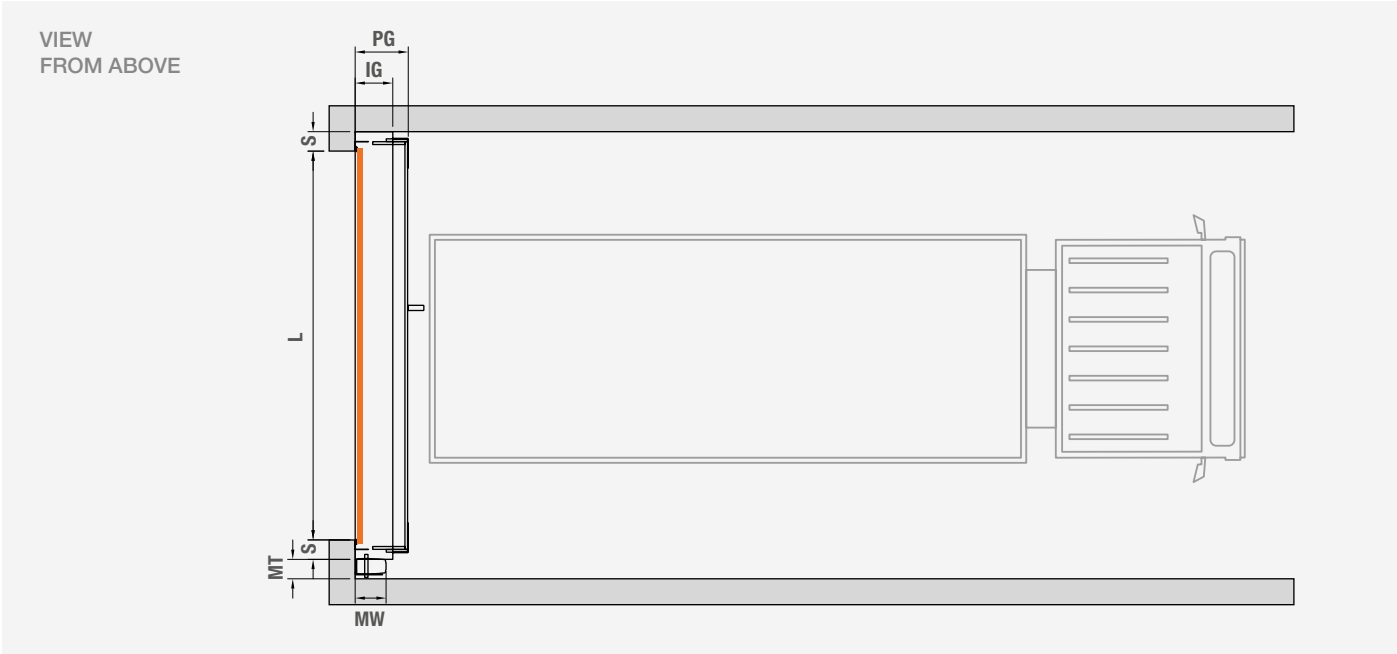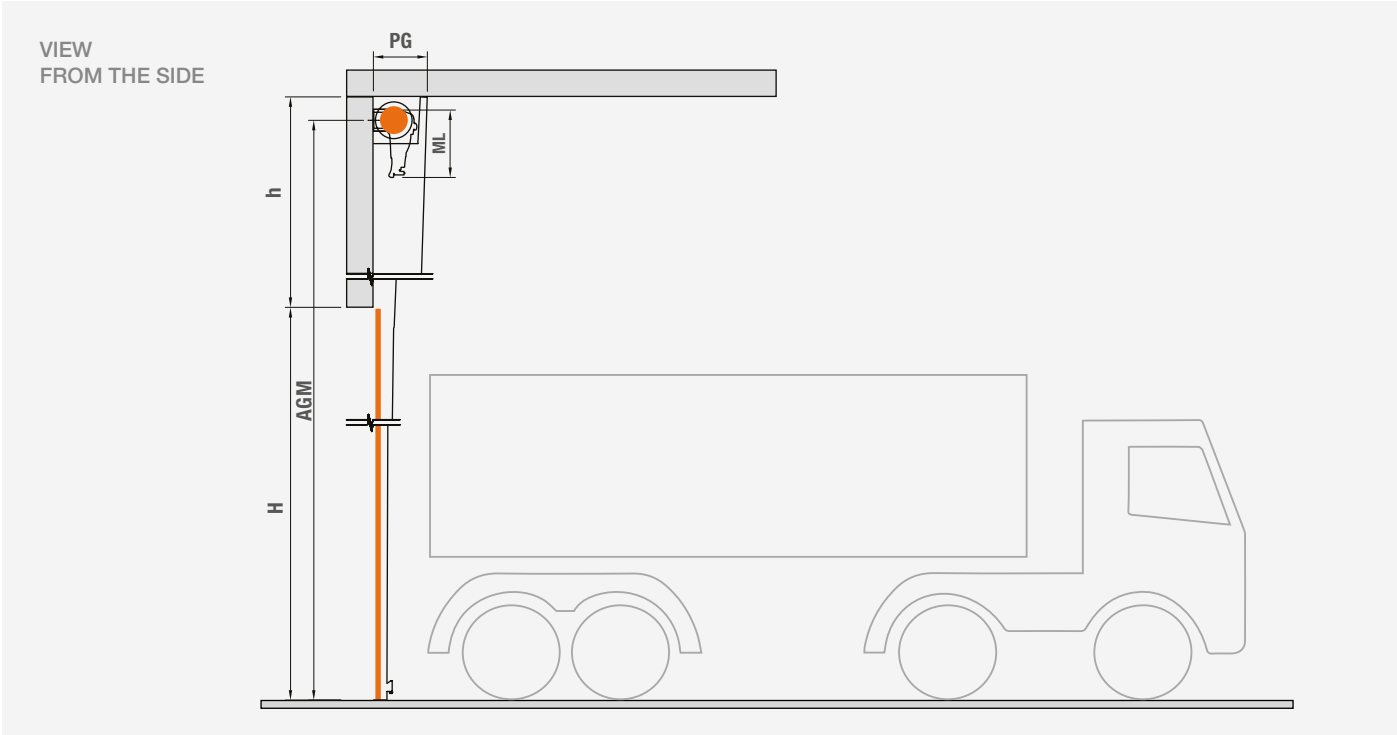


ABBREVIATION	MEANING
H	HEIGHT OF OPENING
h	H + 600 MINIMUM ARCHITRAVE
PG	550 SLIDING MECHANISM OVERALL SIZE
HUT *	H USEFUL PASSING HEIGHT
HG	H + h TRACK HEIGHT FROM GROUND
AGM	H + h - 200 SPRING GROUP AXLE POSITION


ABBREVIATION	MEANING
IG	289 SPRING GROUP OVERALL SIZE
L	WIDTH OF OPENING
S	MIN. 150 LATERAL SPACE
ML	MAX 505 MOTOR LENGTH OVERALL SIZE
MW	MAX 240 MOTOR WIDTH OVERALL SIZE
MT	MIN. 150 MOTOR SIDE OVERALL SIZE

* **Note:** Data valid where no GO-LEVEL / GO-STEP pedestrian door


TYPE OF FIXING

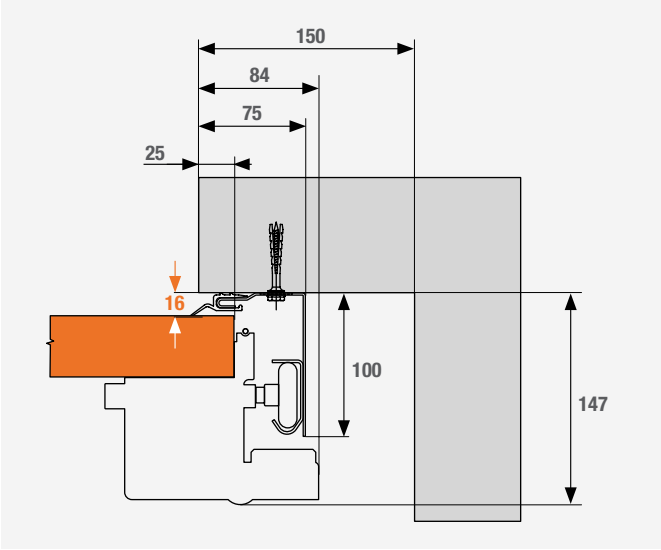


STANDARD ASSEMBLY
Compatible with models **GI300NF, GI350NF, GI450NF, GI520NF, GI990HF** and **GIH+600VF**

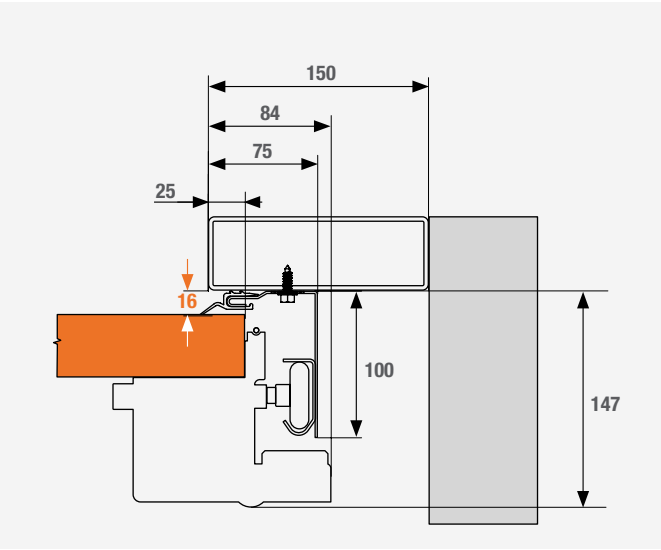


Front assembly with 150 mm tubing where there is no jamb.
Compatible with models **GI300NF, GI350NF, GI450NF, GI520NF, GI990HF** and **GIH+600VF**

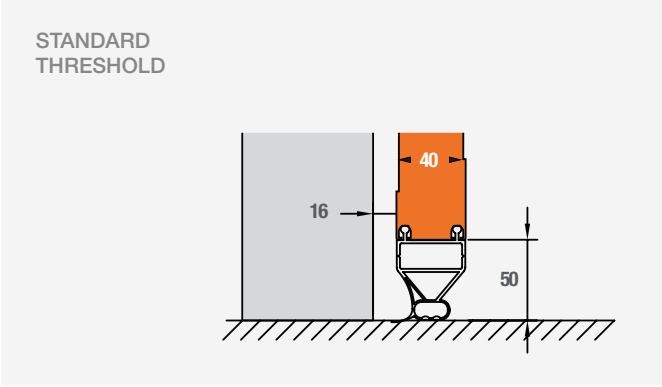


GO-LEVEL VERTICAL OVERALL SIZES

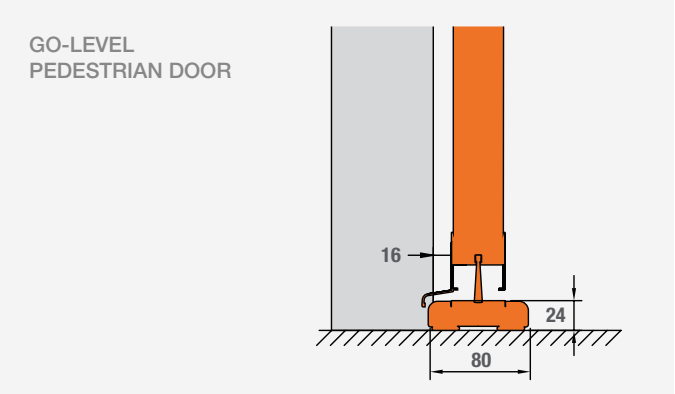

GO-STEP VERTICAL OVERALL SIZES

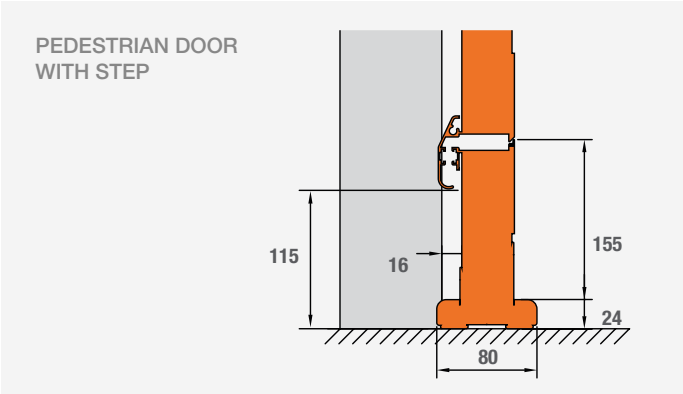

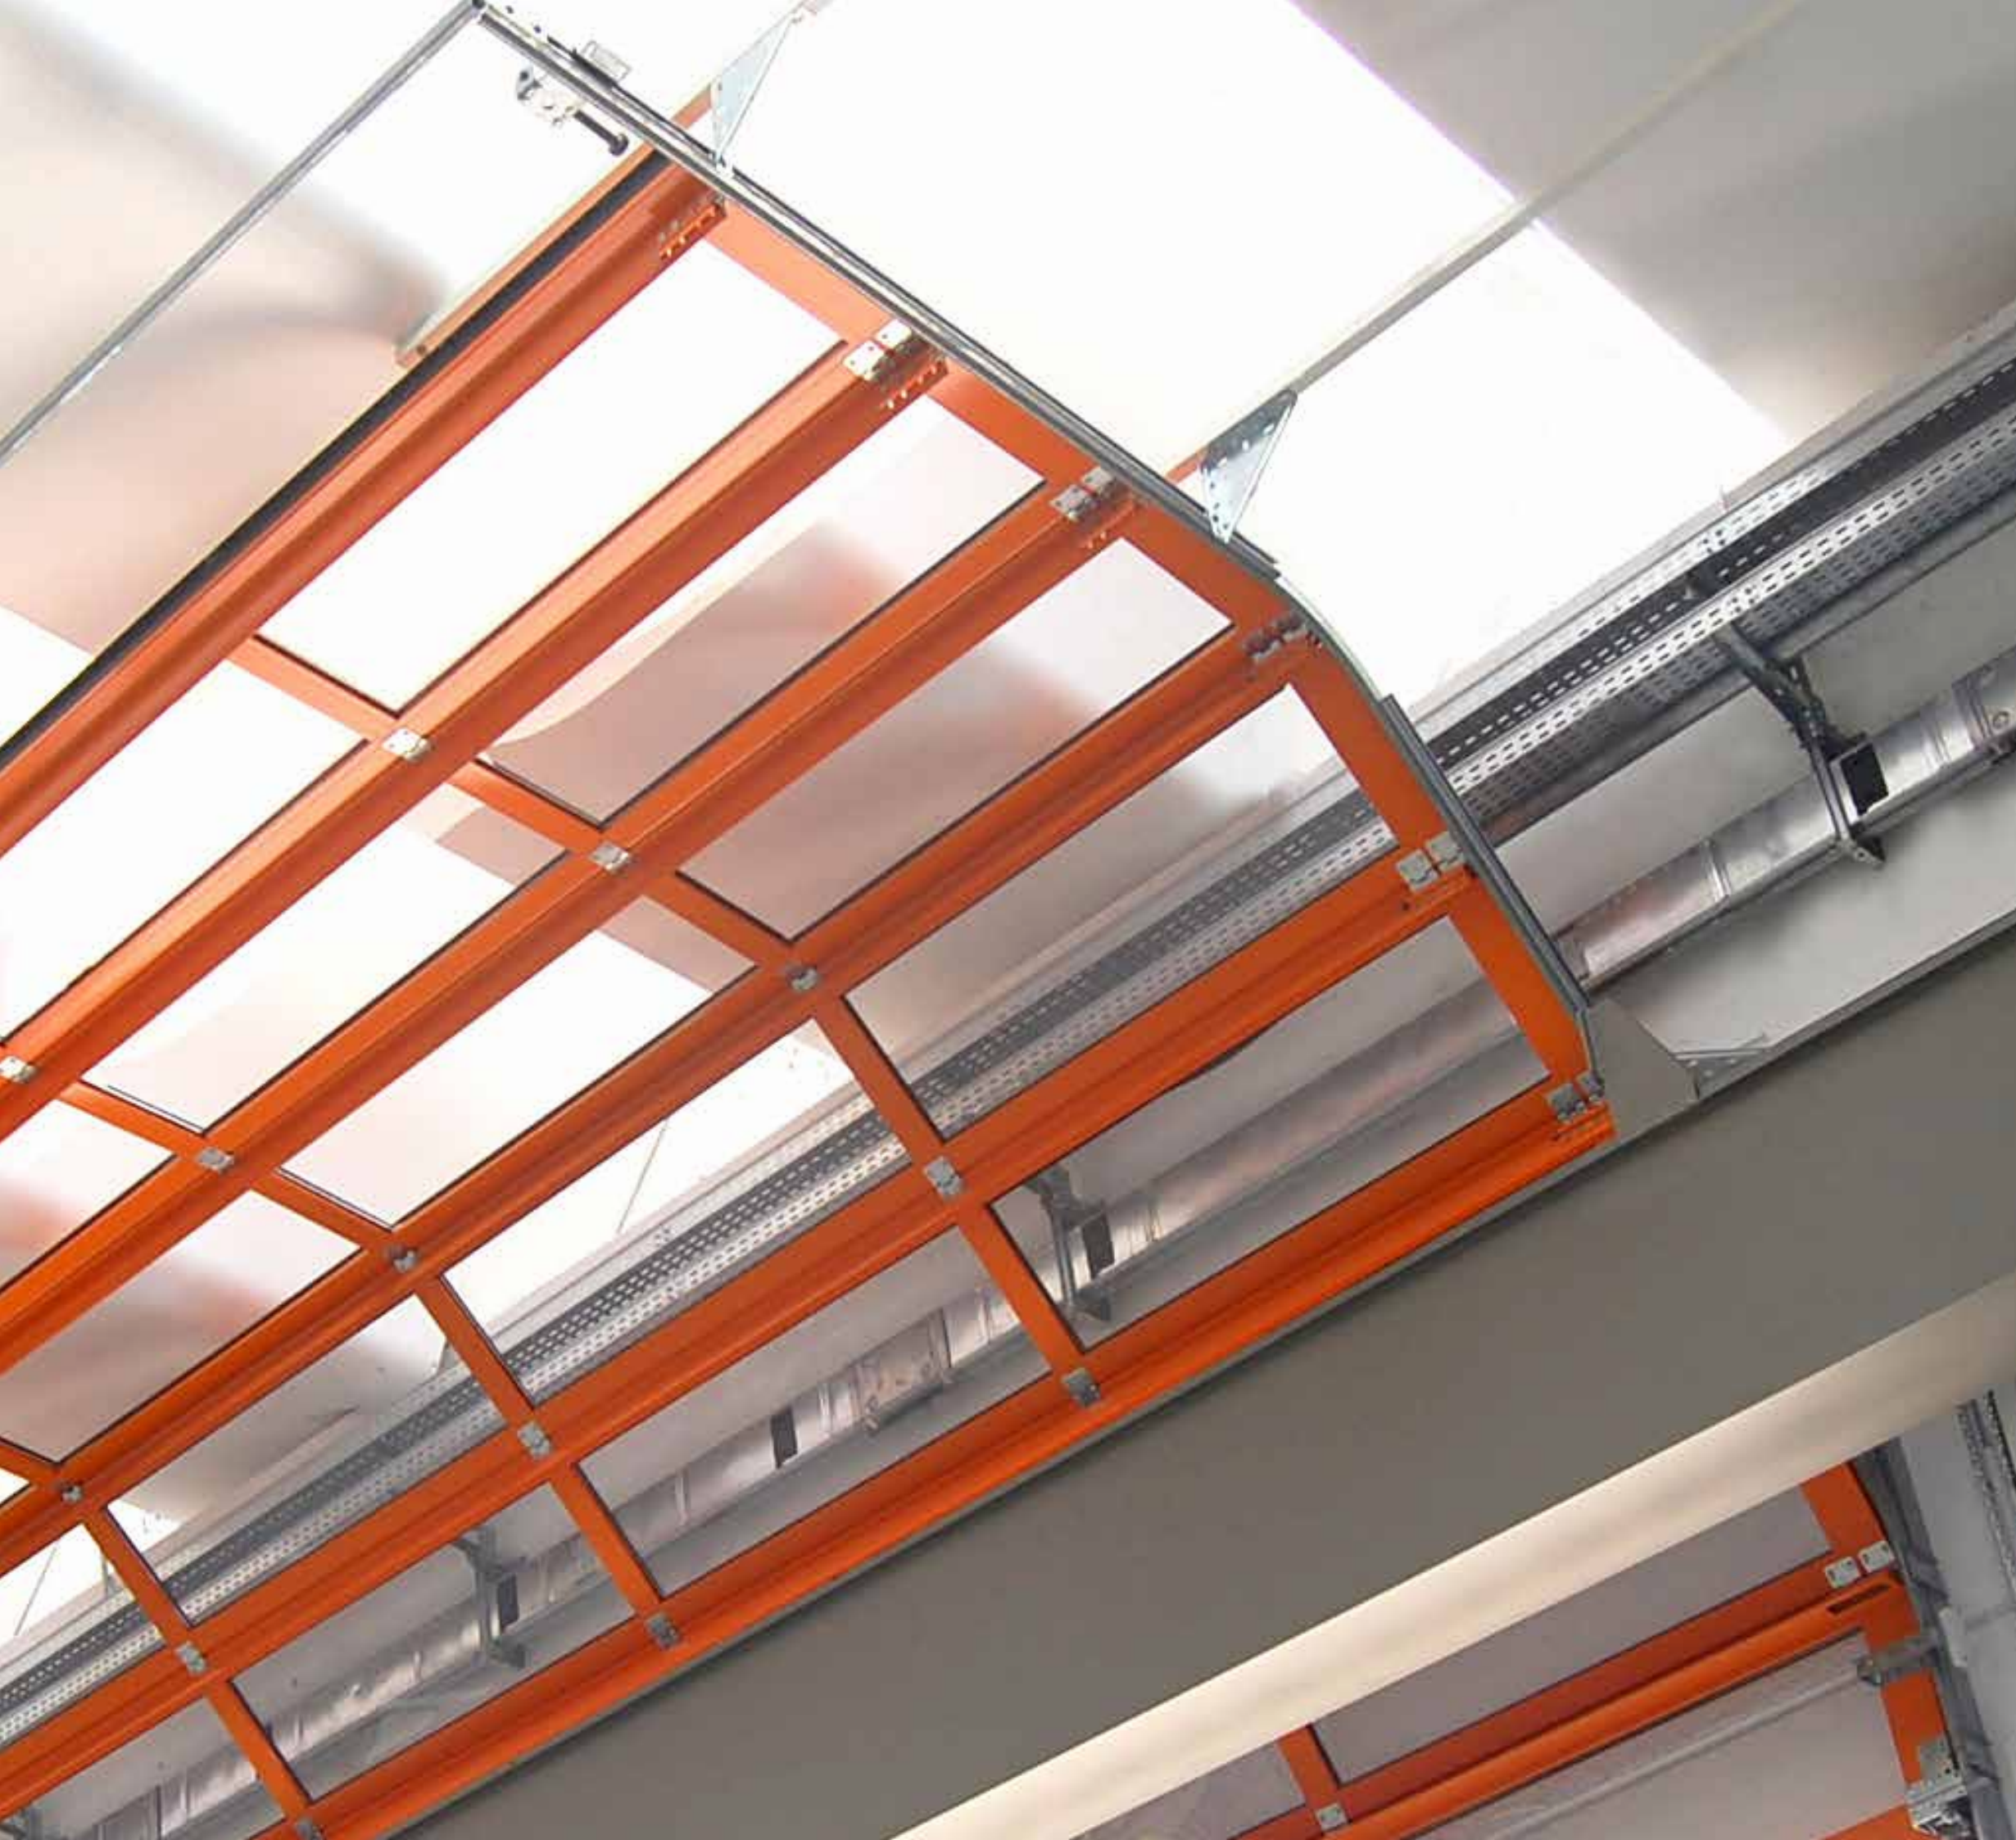

**SPECIAL
SOLUTIONS**

IRON

Industrial sectional door
without spring assembly

A practical system that helps you save on installation work and especially on maintenance tasks. It is particularly suited for large doors. Also available with GO-LEVEL and/or aluminium sections.

For small and large companies, the IRON models offer sectional doors without torsion spring assemblies. This solutions removes the need for maintenance, is silent when in motion and quick to install and commission.




AVAILABLE WITH THESE PANELS




PIANO




DOGATO




RIGATO



MILLERIGHE



SCENARIO



PANORAMIC

Note:
Product on request.
Please contact the technical office for
information on availability and feasibility.



**GO-LEVEL / STEP
PEDESTRIAN
DOOR**

GO-LEVEL

New pedestrian door

The elegant door for pedestrians to pass through, built into CAME GO residential and industrial sectional doors that, thanks to the lowered threshold with rounded edges, makes the entrance and exit of people, buggies, push chairs and bikes very easy. Equipped with all the necessary safety mechanisms, this pedestrian door integrates perfectly with the overall door design, creating a simple yet harmonious and refined look.



GLASS AND MESH FILLER



Clear



Satin



Opal



Mesh micro-perforated



Expanded metal mesh




Wire mesh




Alu + MDF Panels

WINDOWS



GOBLÒ
(only 495 x 200 mm)



GO-VISION

COLOUR / FINISHES OF ALUMINIUM PROFILES

										
Aluminium Anodised	White 9016	Black 9005	1013	7035	7040	9002	9006	6005	3003	6009
										
5010	8014	7016	Golden Oak	Dark Oak	Anthracite	Other Colours Available				

Note: CAME GO uses the SIMILAR RAL colour range. The SIMILAR RAL colour tones in the catalogue and other CAME GO documents and promotional material are approximate and should be considered as an indication of the colour shade. The finished product colour may differ in tone, shade and brightness with respect to the SIMILAR RAL sample.

TECHNICAL SPECIFICATIONS



The pedestrian door integrated into the larger door front is fitted with:

- Aluminium threshold in reduced dimensions with surface treatment with black paint.
- ORANGE-SAFE threshold warning strip.
- Anti-drip profile with integrated self-adjustment and self-centring mechanism for anodised black door.
- Pinch-resistant inserts.
- Hinges hidden in the aluminium profiles, to protect the mechanical workings from weathering.
- Glide door closer supplied pre-mounted.

- Hinges, aluminium profiles and panels fixed with threaded inserts and metric screws for a strong, reliable mechanical hold. (including after repeated adjustment).
- Aluminium profiles supplied to match the door front.
- Inside/outside handle complete with 1-point lock.
- Micro safety switch (to prevent accidental opening of the main door while the pedestrian door is open). ONLY FOR AUTOMATIC DOORS (OR WITH PRE-FITTINGS)

AVAILABLE OPTIONS

- 5-point locking system.
- Panic bar with 1-point closure.
- Panic bar with 3-point closure.

- Push-Pad with 1-point closure.
- Push-Pad with 3-point closure.

GO LEVEL IS THE PASS DOOR INTEGRATED INTO THE MAIN DOOR FRONT.

It draws together numerous features and functions in just one product:



Small GO-LEVEL aluminium threshold AS STANDARD



New anti-drip profile with a self-adjustment and self-centring mechanism AS STANDARD




Special hidden hinges AS STANDARD



ORANGE-SAFE threshold warning strip AS STANDARD

GO-LEVEL STANDARD POSITION W=800/900/1200

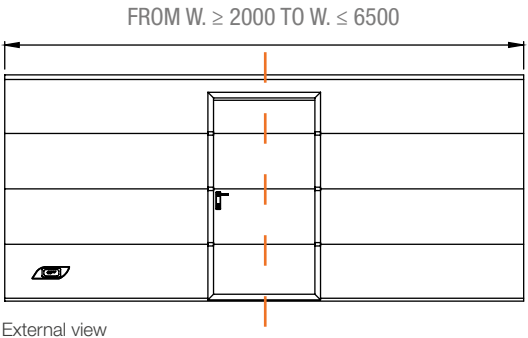


External view

- The CAME GO standard fitting is composed of a GO-LEVEL pass door positioned centrally.


- Door passage height (from floor to flush top inside edge):
H = 1850 with panels 500 mm
H = 2180 with panels 610 mm

GO-LEVEL OPTIONAL POSITION W.=800/900/1200 (on request, at no extra cost)

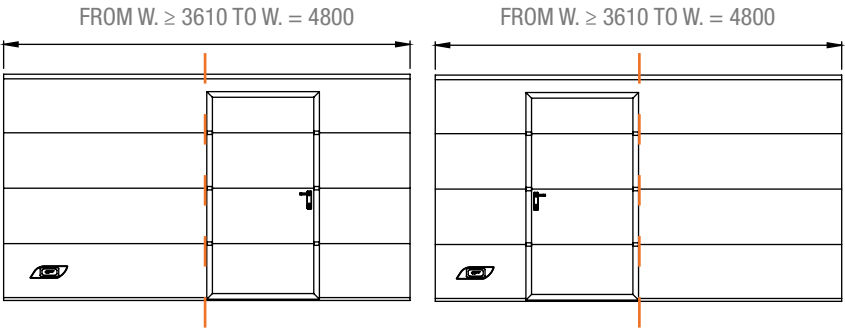


- The off-centre positioning is an optional. The limitations shown in the figure apply.

CLEAR PASSAGE HEIGHT WITH INTEGRATED GO-LEVEL

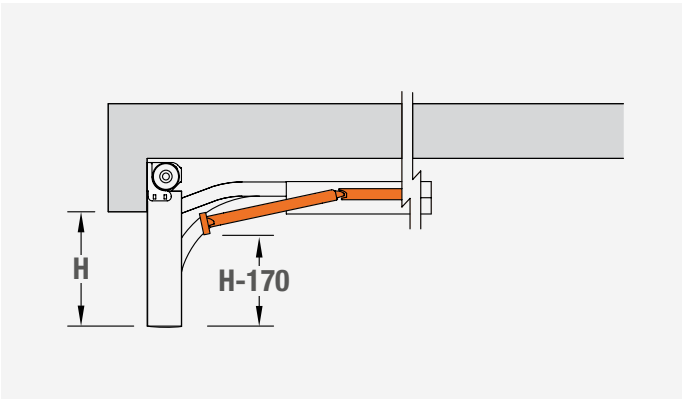

DOORS WITH GO-LEVEL

GO-LEVEL OVERALL SIZES

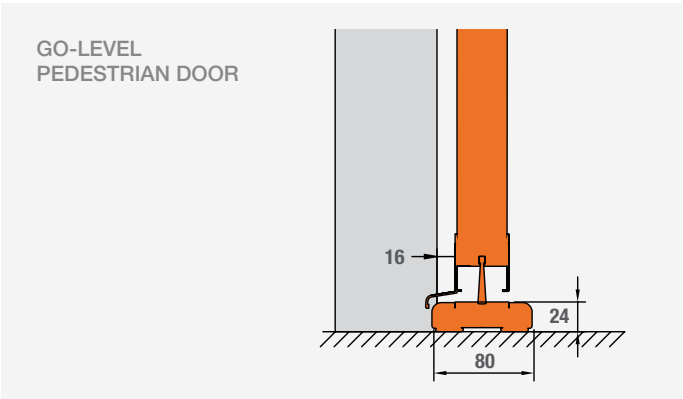

GO-STEP

Pedestrian door

GO-STEP is the pass door with a step integrated into the main door front. It draws together numerous features and functions in just one product.



GLASS AND MESH FILLER



Clear



Satin



Opal



Mesh micro-perforated



Expanded metal mesh




Wire mesh




Alu + MDF Panels

WINDOWS



GOBLÒ
(only 495 x 200 mm)



GO-VISION

COLOUR / FINISHES OF ALUMINIUM PROFILES

 Aluminium Anodised	 White 9016	 Black 9005	 1013	 7035	 7040	 9002	 9006	 6005	 3003	 6009
 5010	 8014	 7016	 Golden Oak	 Dark Oak	 Anthracite	 Other Colours Available				

Note: CAME GO uses the SIMILAR RAL colour range. The SIMILAR RAL colour tones in the catalogue and other CAME GO documents and promotional material are approximate and should be considered as an indication of the colour shade. The finished product colour may differ in tone, shade and brightness with respect to the SIMILAR RAL sample.

TECHNICAL SPECIFICATIONS



Special hidden hinges
AS STANDARD

The pedestrian door integrated into the larger door front is fitted with:

- Pinch-resistant inserts.
- Hinges hidden in the aluminium profiles, to protect the mechanical workings from weathering.
- Glide door closer supplied pre-mounted.
- Hinges, aluminium profiles and panels fixed with threaded inserts and metric screws for a strong, reliable mechanical hold. (including after repeated adjustment).


- Aluminium profiles supplied to match the door front.
- Inside/outside handle complete with 1-point lock.
- Micro safety switch (to prevent accidental opening of the main door while the pedestrian door is open). ONLY FOR AUTOMATIC DOORS

AVAILABLE OPTIONS

- 5-point locking system.
- Panic bar with 1-point closure.
- Panic bar with 3-point closure.

- Push-Pad with 1-point closure.
- Push-Pad with 3-point closure.


GO-STEP STANDARD POSITION W=800/900/1200

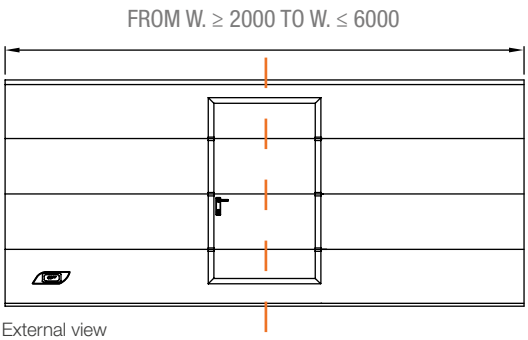

- The CAME GO standard fitting is composed of a GO-STEP pass door positioned centrally.

- Door passage height (from floor to flush top inside edge):
H = 1850 with panels 500 mm
H = 2180 with panels 610 mm

GO-STEP OPTIONAL POSITION W.=800/900/1200 (on request, at no extra cost)

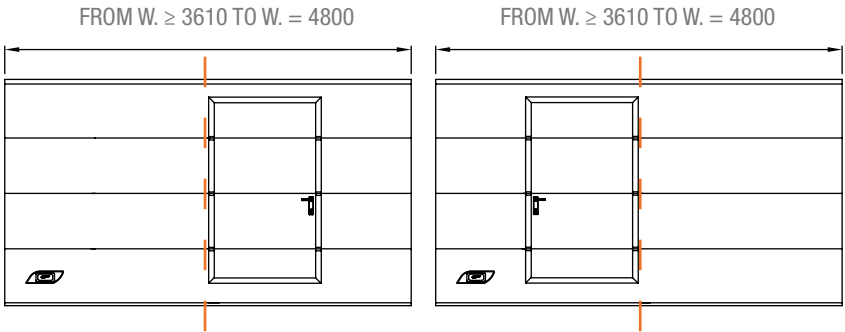

- The off-centre positioning is an optional. The limitations shown in the figure apply.

GO-STEP OVERALL SIZES





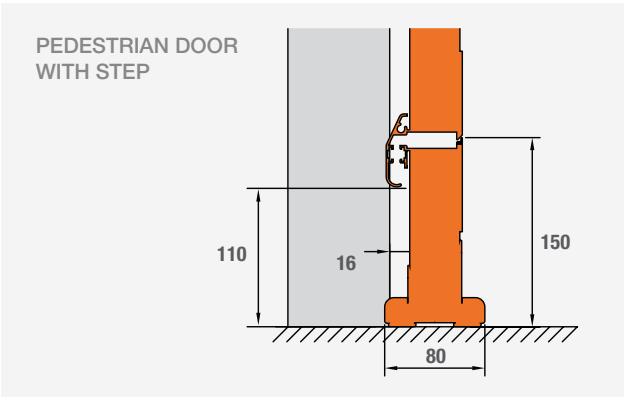


DIAGRAM SHOWING GO-LEVEL / GO-STEP FEASIBILITY ON RESIDENTIAL DOOR

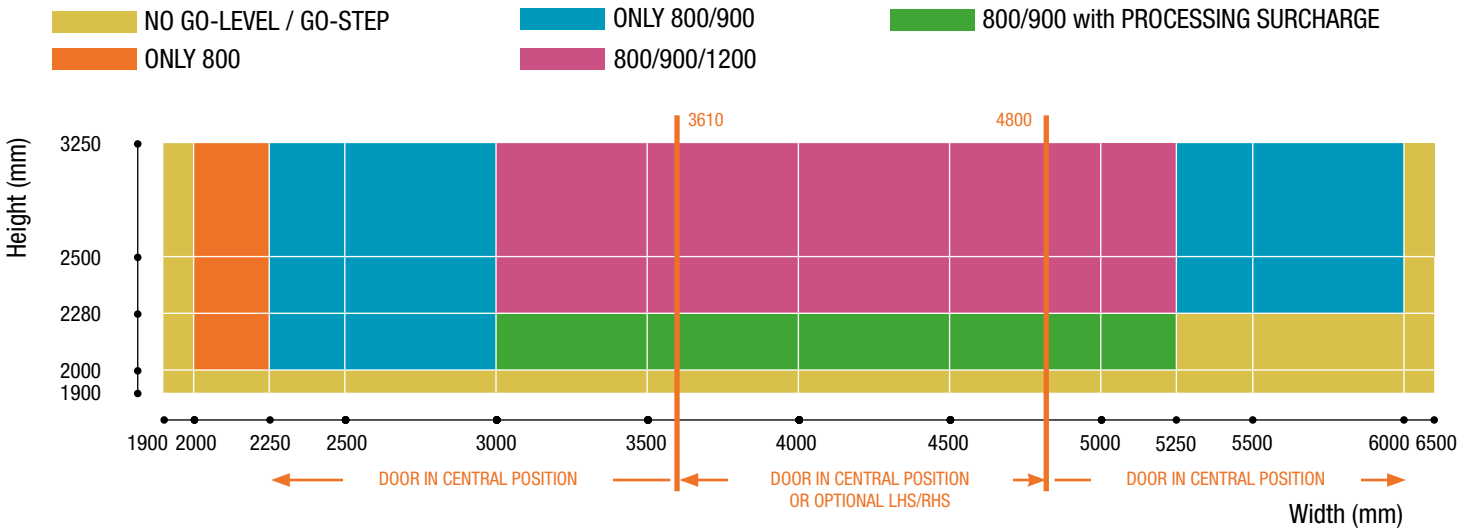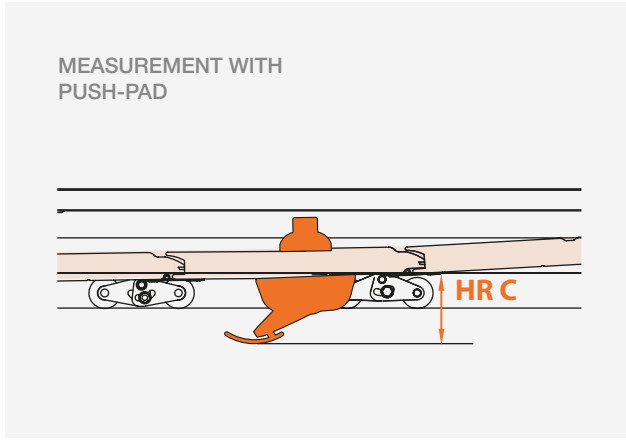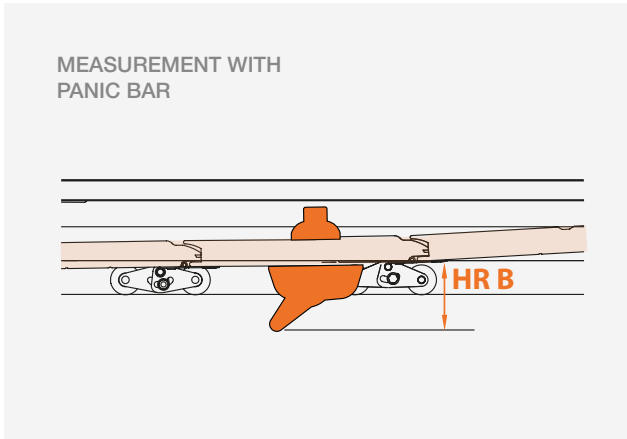


Note: The model GR630HF requires a minimum height of 2500 mm for inserting the GO-LEVEL / GO-STEP pedestrian door.

GO-LEVEL / STEP handle measurements with sectional door open

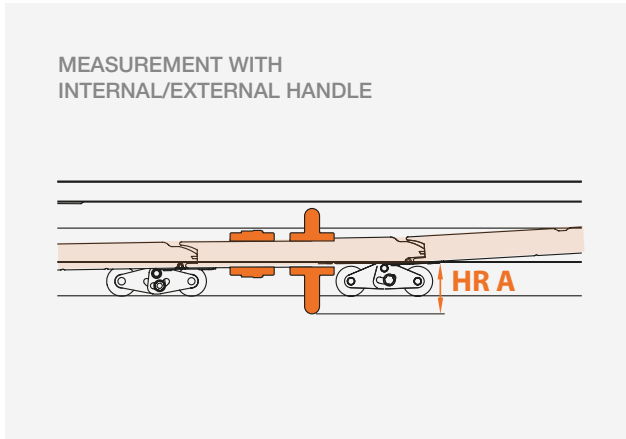




ABBREVIATION	MEANING
HRA	105 mm INSIDE MEASUREMENT WITH HANDLE
HRB	140 mm INSIDE MEASUREMENT WITH BAR
HRC	140 mm INSIDE MEASUREMENT WITH PUSH-PAD

DIAGRAM SHOWING GO-LEVEL / GO-STEP FEASIBILITY ON INDUSTRIAL DOOR

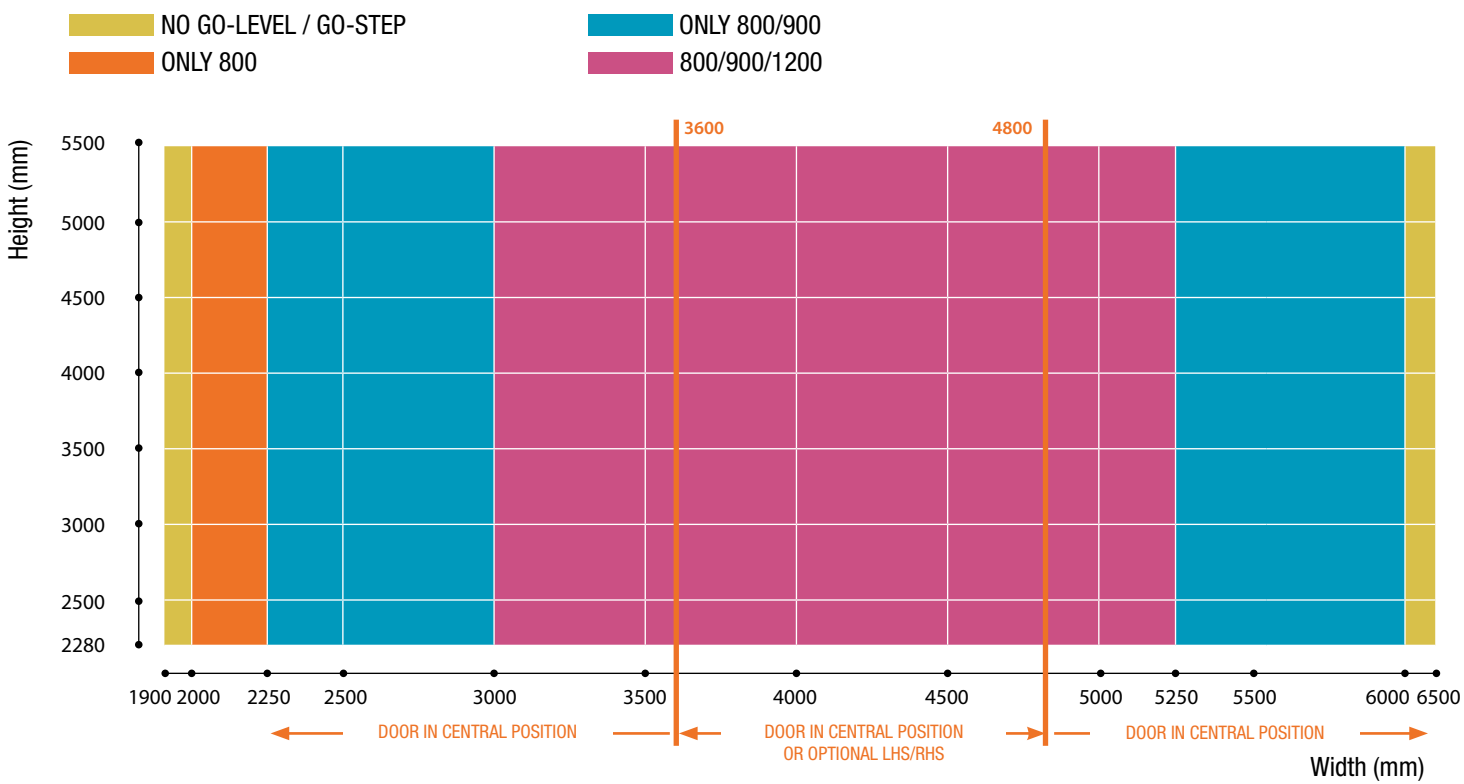

Note: The model GI990HF + GIH+600VF requires a minimum height of 2500 mm for inserting the GO-LEVEL / GO-STEP pedestrian door.


GO-LEVEL / STEP handle measurements with sectional door open

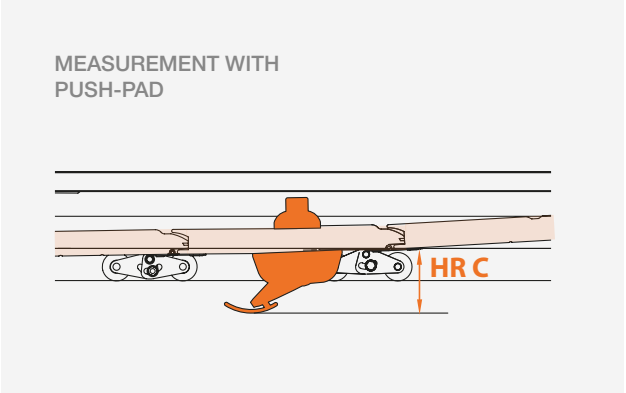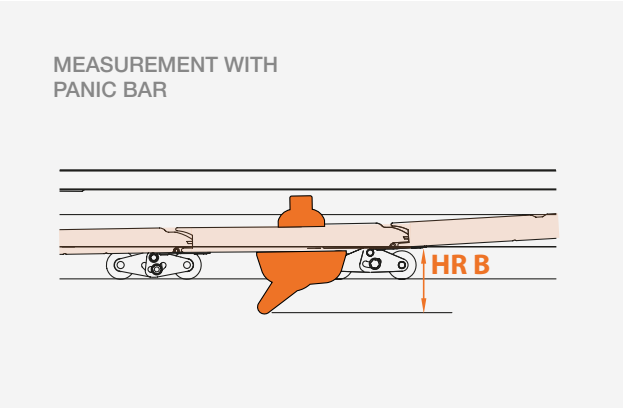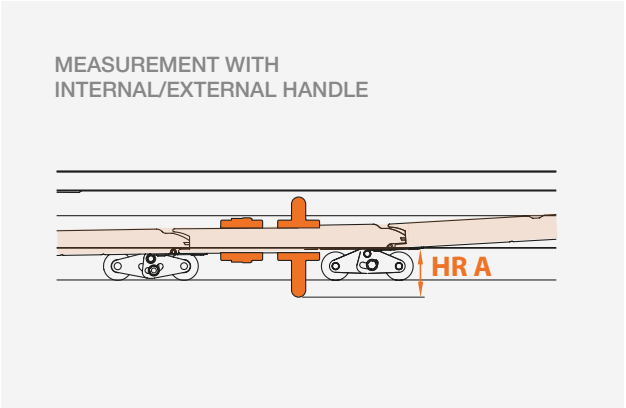


ABBREVIATION	MEANING
HRA	105 mm INSIDE MEASUREMENT WITH HANDLE
HRB	140 mm INSIDE MEASUREMENT WITH BAR
HRC	140 mm INSIDE MEASUREMENT WITH PUSH-PAD

PEDESTRIAN DOOR SWING DIRECTION
SEEN FROM ABOVE


Central door with
RH opening

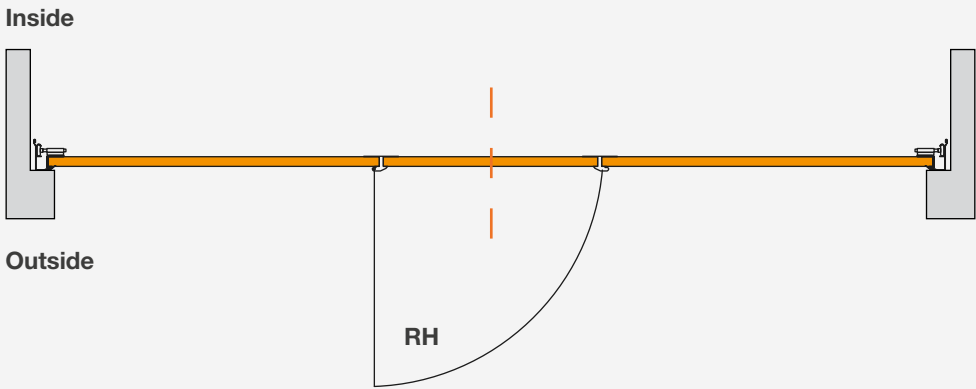


Central door with
LH opening

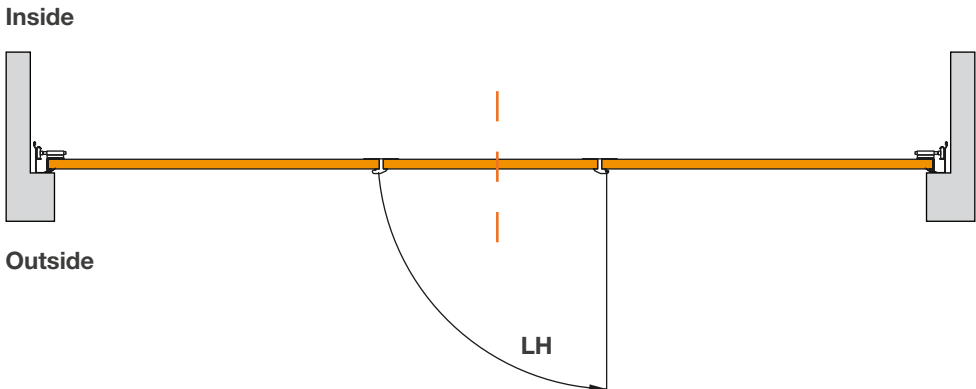

RH central door
with LH opening

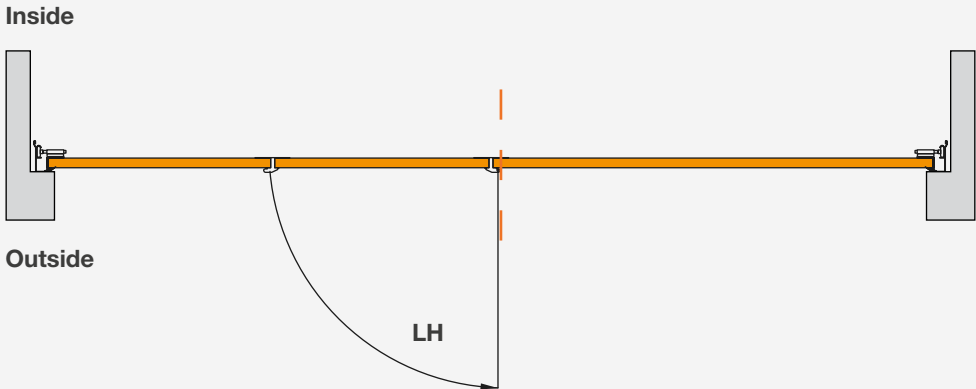

LH central door
with RH opening

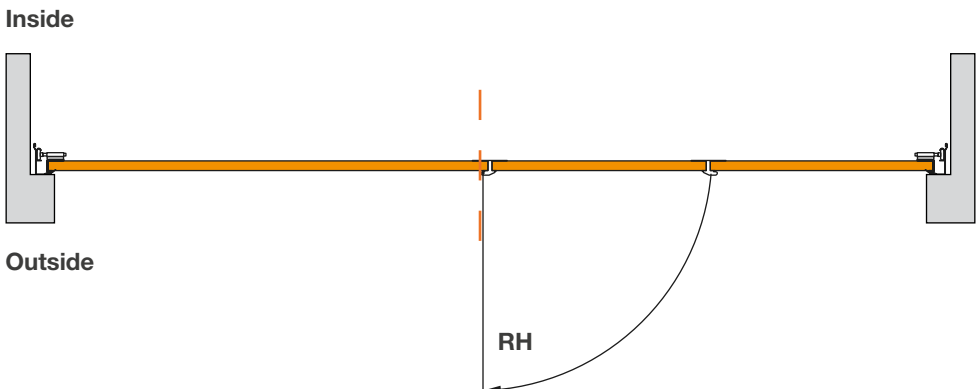

AVAILABLE OPTIONALS



OPTIONAL 5-point safety
locking system



OPTIONAL innovative push-
pad mechanism



OPTIONAL
panic bar

CODE	GO-LEVEL / GO-STEP PEDESTRIAN DOOR
02140301	Pass door W=900 mm, with 1-point lock - Door profile Similar-RAL 9016 or 9005
02140319	Micro-switch for pass door, assembled and wired - MANDATORY FOR MOTORISED DOORS
02140320	Surcharge for pass door with width span W=800 mm
02140321	Surcharge for pass door with width span W=1200 mm
02140591	Surcharge for Similar RAL pass door profile painting
02140592	Surcharge for Golden/Dark oak pass door profile sublimation
02140311	Full 5-point lock for pass door
02140312	Panic bar with 1-point closure and external control unit
02140313	Panic bar with 3-point closure and external control unit
02140314	Push-Pad with 1-point closure and external control unit
02140315	Push-Pad with 3-point closure and external control unit
0219011	Surcharge for manufacture for H < 2280 mm

Note: the GO-LEVEL and GO-STEP pedestrian doors wider than 1 m require opening commands with a 3-point or higher closure to be installed.



GO-VISION

GO-VISION

Glazed section in aluminium

The GO-VISION section(s) is (are) the new way of playing with light. Illuminate the inside of your premises with natural light thanks to the huge range of insulating glasses, or choose the mesh filler for better ventilation of the spaces. Design, functionality and safety are some of the features of these special aluminium sections.



GO-VISION with filler made of mesh



GLASS AND MESH FILLER



Clear



Satin



Opal



Mesh micro-perforated



Expanded metal mesh



Wire mesh



Alu + MDF Panels

COLOUR / FINISHES OF ALUMINIUM PROFILES



Aluminium Anodised



White 9016



Black 9005



1013



7035



7040



9002



9006



6005



3003



6009



5010



8014



7016



Golden Oak



Dark Oak



Anthracite



Other Colours Available

Note: CAME GO uses the SIMILAR RAL colour range. The SIMILAR RAL colour tones in the catalogue and other CAME GO documents and promotional material are approximate and should be considered as an indication of the colour shade. The finished product colour may differ in tone, shade and brightness with respect to the SIMILAR RAL sample.

TECHNICAL SPECIFICATIONS

The GO-VISION section(s) are made with robust aluminium profiles and, for widths above 4000 mm, are fitted with a robust Omega reinforcement which is profiled in a single, compact and highly resistant piece. The profiles on the GO-VISION section(s) are painted (inside and outside) to match the surface or sublimated where paired with GOLDEN OAK or DARK OAK panels.

The male and female profiles faithfully replicate the pinch-resistant profile on the insulated steel panels. Threaded inserts and metric screws are used to fix all parts so as not to compromise the excellent seal, even after making numerous adjustments.

FILLER SPECIFICATIONS

Acrylic single-wall

Acrylic single-wall sheet, 3 mm thick. It is fixed to the aluminium section using glazed beads fixed from the inside.

Polycarbonate single-wall

Polycarbonate single-wall sheet, 3 mm thick. It is fixed to the aluminium section using glazed beads fixed from the inside.

Acrylic double-glazing

Double-glazing composed of a double layer of acrylic, 3 mm thick, separated by a 12 mm aluminium frame and sealed around the edges, giving a total thickness of 18 mm. It is fixed to the aluminium section using glazed beads fixed from the inside.

Polycarbonate double-glazing

Double-glazing composed of a double layer of polycarbonate, 3 mm thick, separated by a 12 mm aluminium frame and sealed around the edges, giving a total thickness of 18 mm. It is fixed to the aluminium section using glazed beads fixed from the inside.

Expanded metal mesh / rhomboidal

Expanded metal mesh, 43x10 mm, 1.5 mm thick, with an open area of 67%. The mesh is made from galvanised steel which is then powder-coated. It is fixed to the aluminium section using glazed beads fixed from the inside.

Micro-perforated sheet metal

Micro-perforated sheet metal with 6 mm Ø holes and 9 mm pitch with an open area of 40%. The sheet metal is made from galvanised steel which is then powder-coated. It is fixed to the aluminium section using glazed beads fixed from the inside.

Expanded sheet metal FILS/21

Expanded sheet metal with a mesh pattern that adapts to suit unique architectural surroundings, and those that require limited visibility inside, as the open area is just 30%. The sheet metal is made from aluminium which is then powder-coated. It is fixed to the aluminium section using glazed beads fixed from the inside.

MDF insulated panel

Insulated 20 mm thick panel. The panel is composed of a 12 mm polystyrene core to which 4 mm MDF panels are applied. Aluminium sheet metal which can be painted is then applied to these. It is fixed to the aluminium section using glazed beads fixed from the inside.

PROFILES



* STANDARD MALE PROFILE

pinch-resistant aluminium male profile







* REINFORCED MALE PROFILE

pinch-resistant aluminium male profile with reinforcement

ALUMINIUM SECTIONS 40 MM THICK

Mirror divisions and panel reinforcements





WIDTH SPAN: FROM 1900 TO 2680

- 2 INFILLS
- MALE PROFILE, NOT REINFORCED



WIDTH SPAN: FROM 2690 TO 3600

- 3 INFILLS
- MALE PROFILE, NOT REINFORCED

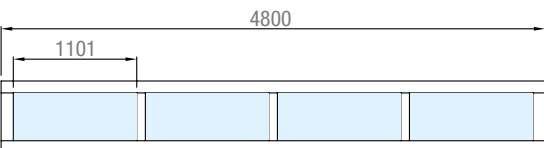



WIDTH SPAN: FROM 3610 TO 4800

- 4 INFILLS
- REINFORCED MALE PROFILE (FROM L > 4000)

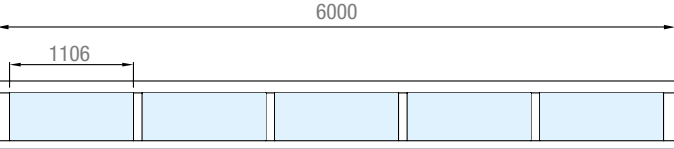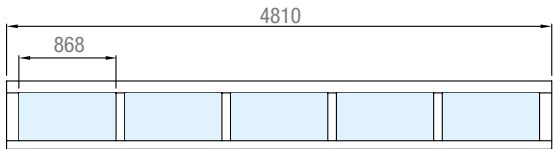

WIDTH SPAN: FROM 4810 TO 6000


- 5 INFILLS
- REINFORCED MALE PROFILE

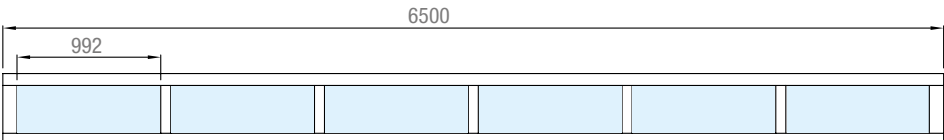

WIDTH SPAN: FROM 6010 TO 6500

- 6 INFILLS
- REINFORCED MALE PROFILE

CONFIGURATION EXAMPLES

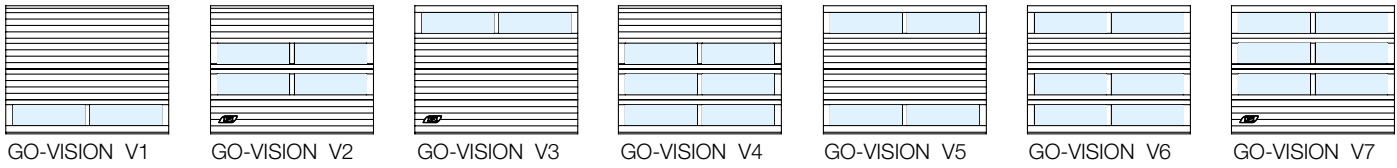

CODE	GO-VISION
02110801	Surcharge for Go-Vision section without reinforcement in Similar Ral STANDARD GO - Width < 4000 mm
02110802	Surcharge for Go-Vision section with reinforcement in Similar Ral STANDARD GO - Width > 4000 mm
02110803	Surcharge for Go-Vision section without reinforcement in Similar Ral colours (check feasibility) - Width < 4000 mm
02110804	Surcharge for Go-Vision section with reinforcement in Similar Ral colours (check feasibility) - Width > 4000 mm
02110805	Surcharge for Go-Vision section without reinforcement in Similar Wood sublimated - Width < 4000 mm
02110806	Surcharge for Go-Vision section with reinforcement in Similar Wood sublimated - Width > 4000 mm
02110807	Surcharge for Go-Vision section with oxidized reinforcement - Width < 4000 mm
02110808	Surcharge for Go-Vision section with oxidized reinforcement - Width > 4000 mm

CODE	SINGLE WALL FILLERS
11110011TG	Go-Vision single wall filler - 3 mm thick, clear acrylic
11110111TG	Go-Vision single wall filler - 3 mm thick, clear polycarbonate
11110013TG	Go-Vision single wall filler - 3 mm thick, satin acrylic

CODE	INSULATING GLASS FILLERS
11110121TG	Go-Vision insulating glass filler 3+12+3 mm, clear + clear polycarbonate
11110021TG	Go-Vision insulating glass filler 3+12+3 mm, clear + clear acrylic
11110023TG	Go-Vision insulating glass filler 3+12+3 mm, clear + satin acrylic
11110024TG	Go-Vision insulating glass filler 3+12+3 mm, clear + opal acrylic

CODE	MESH / SHEET METAL / BLIND PANEL FILLERS
11110003VV	Go-Vision stretched steel mesh filler 43x10 - 3 mm thick, Similar Ral paint
11110001VV	Go-Vision micro-perforated sheet metal filler Ø6 x 9 - 3 mm thick, Similar Ral paint
11110008VV	Go-Vision FILS/21 stretched aluminium sheet filler - 3 mm thick, Similar Ral paint
11110002VV	Go-Vision filler with insulating panel 20 mm thick - Similar Ral paint






GO-MOTION
PLUS / NEXT

THEIR JOB IS TO SERVE YOU!

Practicality of installation and **ease** of use are the basic qualities of these two automation kits designed for your **CAME GO** garage door.
PLUS is a guarantee for renewed **safety, reliability** and **customization thanks** to the range of dedicated accessories!

- Self-learning system for accurate and fast installation.
 - Display and external panel for easier and faster diagnosis.
 - 24 V DC systems to guarantee greater security and reliability.
- Control board with separate terminals for simpler cabling.
 - Built-in decoding of Rolling Code and key code (Twin).
 - Management of GO-WIRELESS devices.
 - Can manage keypads via the R800 board.
- Tested in compliance with current regulatory standards.
 - Designed for connection to CAME CONNECT (remote diagnostics).
 - Can operate in emergency mode during blackouts.

GO-MOTION PLUS KIT:
Maximum technology
in a smaller package!

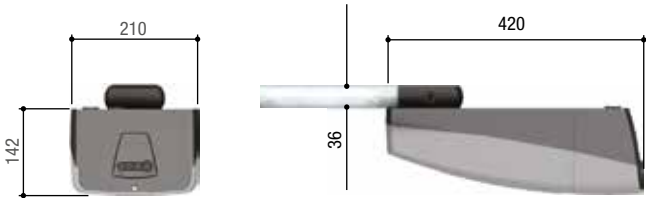

MODELS WITH BELT TRACK
SILENT PRACTICALITY

GO-MOTION PLUS 100 KIT

CODE	DESCRIPTION	mq	kg
024A0012	GO MOTION 100 PLUS KIT - 1000N / 230 V = It includes : motor (with 1,5 mt power cable + Shuko socket) + installed 433,92 MHz receiver board + 2 transmitters 4 dual-frequency channels (433,92/868,35 MHz) fixed code + brackets / screws + belt motor track.	18	223

GO-MOTION PLUS 130 KIT

CODE	DESCRIPTION	mq	kg
024A0022	GO MOTION 130 PLUS KIT - 1300N / 230 V = It includes : motor (with 1,5 mt power cable + Shuko socket) + installed 433,92 MHz receiver board + 2 transmitters 4 dual-frequency channels (433,92/868,35 MHz) fixed code + brackets / screws + belt motor track.	21	240

MODELS WITH CHAIN TRACK
HIGHER PERFORMANCE

ADVICE: for sectional doors above 18 sqm or with reinforced springs, we recommend the use of automations with chain track.

GO-MOTION PLUS 100C KIT

CODE	DESCRIPTION	mq	kg
024A0013	KIT GO MOTION 100C PLUS - 1000N / 230 V = It includes : motor (with 1,5 mt power cable + Shuko socket) + installed 433,92 MHz receiver board + 2 transmitters 4 dual-frequency channels (433,92/868,35 MHz) fixed code + brackets / screws + chain motor track.	18	223

GO-MOTION PLUS 130C KIT

CODE	DESCRIPTION	mq	kg
024A0023	KIT GO MOTION 130C PLUS - 1300N / 230 V = It includes : motor (with 1,5 mt power cable + Shuko socket) + installed 433,92 MHz receiver board + 2 transmitters 4 dual-frequency channels (433,92/868,35 MHz) fixed code + brackets / screws + chain motor track with extension.	21	240



GO-MOTION 60 NEXT KIT
RESIDENTIAL AUTOMATIONS



GO-MOTION 60 NEXT:
Small, powerful and smart!

- GO-MOTION 60 NEXT is the perfect automation for small-size sectional doors. Thanks to its intuitive menu, resulting from the GO-MOTION PLUS family, the installation will be easy and quick!
- GO-MOTION 60 NEXT standard disposes of the auto-calibration of the forces, of the cycle counter and of the useful Safety Test Function. Partial opening control and power saving mode for
- connected devices (photocells, flashing light, ecc) complete the benefits of this automation kit!
- GO-MOTION 60 NEXT is born to work!

MODEL WITH BELT TRACK

GO-MOTION 60 NEXT KIT



CODE	DESCRIPTION	mq	kg
024A0002	GO MOTION 60 NEXT KIT - 600N / 230 V = It includes : motor (with 1,5 mt power cable + Shuko socket) + installed 433,92 MHz receiver board + 2 transmitters 4 channels (433,92 MHz) fixed code + brackets / screws + belt motor track.	9	115

GO-MOTION PLUS ACCESSORIES
RESIDENTIAL AUTOMATIONS



YOUR
COLORS !

CAME GO TOP PLUS
TRANSMITTERS:

The new generation of transmitters.
Design and Technology
at your fingertips!



TOP PLUS COLOR PACK



6 colors for the **TOP PLUS** transmitters with double-frequency (433,92 / 868,35 MHz). Perfect in your hand, your pocket and between your fingers, thanks to its careful ergonomic design. Small but perfectly formed!

- Fixed Code versions
- Single CR2032 battery
- Low battery indicator

YOUR FAVOURITE color! ..or your friend's / girlfriend's / brother's / sister's / son's / daughter's / dad's / mum's / cousin's, etc.!

CODE	DESCRIPTION	pcs
714A0339	TOP PLUS COLOR PACK 6 pcs pack transmitters 4 channel double frequency (433,92/868,35 MHz) fixed code - colored.	6

ACCESSORIES FOR YOUR AUTOMATION GO-MOTION PLUS / NEXT
The evolution of the species!

PRODUCT	CODE	USE	GENERIC ACCESSORIES
	714A0339	100 PLUS 130 PLUS 60 NEXT	TOP PLUS COLOR PACK 6 pcs pack transmitters 4 channel double frequency (433,92/868,35 MHz) Fixed code - colored.
	714A0344	100 PLUS 130 PLUS 60 NEXT	GO-KEY PLUS Wired key switch with DIN cylinder with blue backlightning - external mounting to the wall
	714A0345	100 PLUS 130 PLUS 60 NEXT	GO-KEY PLUS Wired key switch with DIN cylinder with blue backlightning - recessed mount
	714A0352	100 PLUS 130 PLUS	GO-SELECT PLUS Wired keypad with bluebacklightning, with control board included - external mounting to the wall
	714A0353	100 PLUS 130 PLUS	GO-SELECT PLUS Wired keypad with bluebacklightning, with control board included - recessed mount
	714A0347	60 NEXT	GO-SELECT NEXT Wired keypad with bluebacklightning, with two-way interface included - external mounting to the wall
	714A0348	60 NEXT	GO-SELECT NEXT Wired keypad with bluebacklightning, with two-way interface included - recessed mount
	714A0343	100 PLUS 130 PLUS 60 NEXT	GO-SELECT PLUS/AIR Wireless keypad with blue backlightning, 433,92 MHz - external mounting to the wall
	714A0346	100 PLUS 130 PLUS 60 NEXT	GO-BT SELECT - Bluetooth selector - external wall mounting
	714A9901	100 PLUS 130 PLUS	CAME GO ENJOY! KIT (gateway ethernet + slave module + interface board) to remote control the GO-MOTION PLUS 100/130 automations - COMBINED WITH CAME GO PREMIUM DOOR - (element singularly available as replacement)
	714A9912	100 PLUS 130 PLUS	Slave module for the CAME GO ENJOY! KIT (slave module + interface board) to remote control the GO-MOTION PLUS 100/130 automations - COMBINED WITH CAME GO PREMIUM DOOR - (element singularly available as replacement)

PRODUCT	CODE	USE	GENERIC ACCESSORIES
	CFG. 714A0541	100 PLUS 130 PLUS 60 NEXT	Unlocking mechanism lock with external handle - steel cord - INSERT
	CFG. 714A0542	100 PLUS 130 PLUS 60 NEXT	Emergency unblocking system for pulling drive motor GO-MOTION with metallic cable L3000 and sheath - NOT AVAILABLE for PANORAMIC sections
	CFG. 714A0543	100 PLUS 130 PLUS 60 NEXT	Emergency unblocking system with defender for pulling drive motor GO-MOTION with metallic cable L3000 and sheath - NOT AVAILABLE for VISION and PANORAMIC sections
	714A0544	100 PLUS 130 PLUS	Unblocking system with cord with automatic restarting - for pulling drive motor GO MOTION 100 - 130 track
	714A0351	100 PLUS 130 PLUS 60 NEXT	Pair of safety photocells - 10mt (cables not provided)
	71910121	100 PLUS 130 PLUS 60 NEXT	Pair of infrared safety photocells FTC911 for GO-XFRAME - orientable 90° - 12/24V AC/ DC
	714A0417	100 PLUS 130 PLUS 60 NEXT	GO LIGHT K flashing light, complete with support
	714A1603	100 PLUS 130 PLUS 60 NEXT	433,92 MHz antenna that can be paired with the GO LIGHT K, complete with RG58 cable - 10 mt
	714A0412	100 PLUS 130 PLUS 60 NEXT	GO LIGHT PLUS amber flashing light
	714A0413	100 PLUS 130 PLUS 60 NEXT	GO LIGHT PLUS blue flashing light
	714A1604	100 PLUS 130 PLUS 60 NEXT	433,92 MHz antenna that can be paired with the GO LIGHT PLUS, complete with RG58 cable - 10 mt
	714A0383	100 PLUS 130 PLUS 60 NEXT	Radiofrequency card 433,92 MHz - does NOT manage Rolling Code - SUITABLE FOR use with automations that include Rolling Code system
	714A0312	100 PLUS 130 PLUS 60 NEXT	Outdoor two-channel receiver IP54 12-24V DC - Multiuser 433,92 Mhz
	714A0320	100 PLUS 130 PLUS 60 NEXT	Two-channel interface for keypad
	714A0151	100 PLUS 130 PLUS 60 NEXT	Extension for track drive arm GO MOTION-100/120/100 PLUS/130 PLUS -L=300/600 mm (always included in GR250NF inclined - GR330NF - GI300NF sliding systems)
	714A1154	100 PLUS 130 PLUS 60 NEXT	Extension arm for pulling drive motor L=380 mm - galvanized (standard supply for GR150NF motorised)

NOTE: the articles identified with “CFG” prefix refer to products with inserction processing included




KIT GO-MOTION X
SIDE INDUSTRIAL AUTOMATIONS

Industrial side automa-
tions for sectional doors

- Unit installed directly on the spring shaft
- 24 V DC accessories for a safe and reliable service
- Emergency opening and closing in the event of a blackout

GO-MOTION PLUS 100X KIT

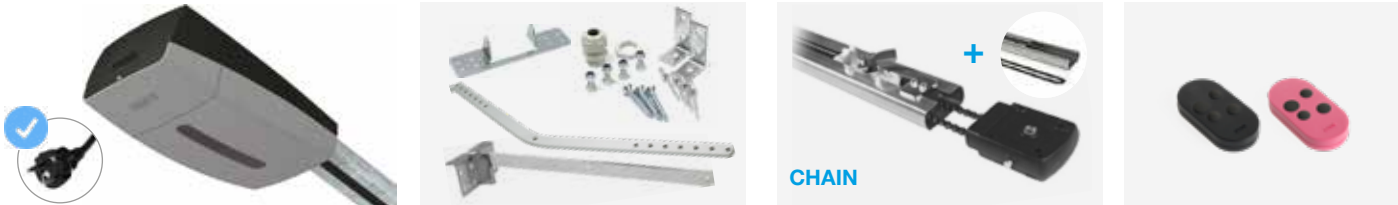

CODE	DESCRIPTION	mq	kg
024A0042	GO MOTION 100X PLUS KIT - 1000N / 220 V = It includes : motor (with 1,5 mt power cable + Shuko socket) + installed 433,92 MHz receiver board + 2 transmitters 4 dual-frequency channels (433,92/868,35 MHz) fixed code + brackets / screws + chain motor track (inclusive of a possible rail extension) + extension for sliding arm	18	223

GO-MOTION PLUS 130X KIT




CODE	DESCRIPTION	mq	kg
024A0052	KIT GO MOTION 130X PLUS - 1300N / 220 V = It includes : motor (with 1,5 mt power cable + Shuko socket) + installed 433,92 MHz receiver board + 2 transmitters 4 dual-frequency channels (433,92/868,35 MHz) fixed code + brackets / screws + chain motor track (inclusive of a possible rail extension) + extension for sliding arm	21	240

GO-MOTION X KIT (60 N/m) 230 V - UP TO 22 mq - MAX 240 kg



CODE	DESCRIPTION	mq.
024A0206	side motor GOMOTION-X KIT DEADMAN version with mechanical limit switch + emergency chain winch. Hole diameter for shaft: ø 25,4 mm. The kit includes: motor + control unit + support bracket + emergency chain winch.	22

GO-MOTION XA KIT (60 N/m) 230 V - UP TO 22 mq - MAX 240 kg

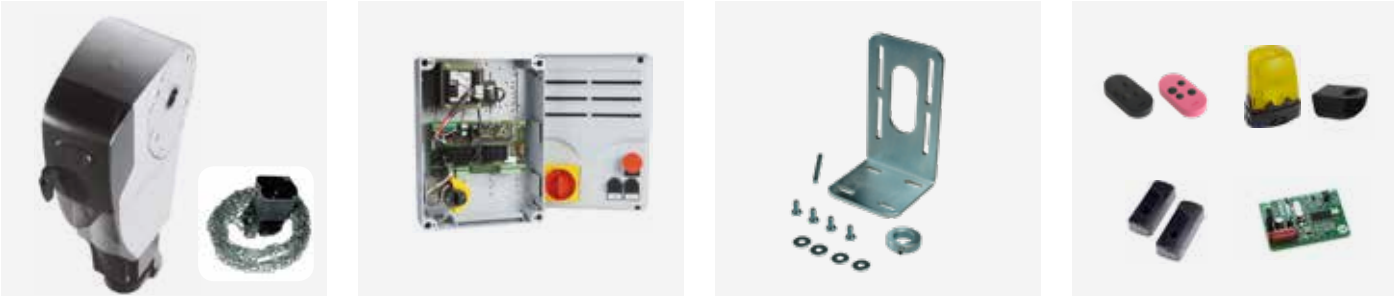

CODE	DESCRIPTION	mq.
024A0307	side motor GOMOTION-XA KIT AUTOMATIC version with mechanical limit switch + emergency chain winch. The kit includes: motor + control unit + support bracket + pair of photocells + 2 4-channel transmitters (433,92/868,35 MHz) Fixed code + radio receiver board 433,92 Mhz Fixed Code + flashing light complete with support + emergency chain winch.	22


For the dedicated accessories, please consult page 183

GO-MOTION XT (80 N/m) KIT400 V - UP TO 50 sqm - MAX 540 kg



CODE	DESCRIPTION	mq.
024A0221	side motor GOMOTION-XT KIT DEADMAN version with mechanical limit switch + emergency chain winch. Hole diameter for shaft: ø 25,4 mm. The kit includes: motor + control unit + support bracket + emergency chain winch.	50

GO-MOTION XTA (80 N/m) KIT400 V - UP TO 50 sqm - MAX 540 kg

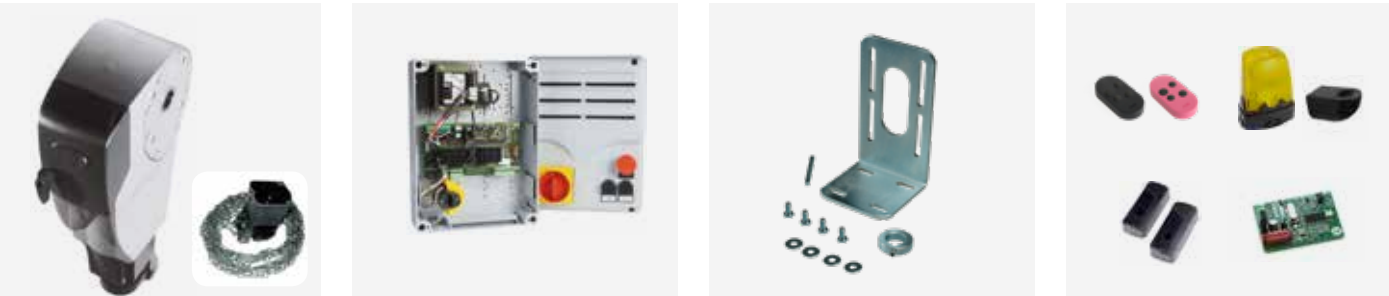

CODE	DESCRIPTION	mq.
024A0322	side motor GOMOTION-XTA KIT AUTOMATIC version con mechanical limit switch + emergency chain winch. The kit includes: motor + control unit + support bracket + pair of photocells + 2 4-channel transmitter (433,92/868,35 MHz) fixed code + receiver radio board 433,92 Mhz Fixed Code + flashing light complete with support + emergency chain winch.	50

PREDISPOSITION
SIDE AUTOMATIONS

CODE	PREDISPOSITION TO AUTOMATION
02120911	Predisposition to side automation

PRODUCT	CODE	GENERIC ACCESSORIES
	712A0151.01	Chain winch for GO MOTION X - XA - XT - XTA (10 m chain)
	712A0152	Chain winch with extension for GO MOTION X - XA - XT - XTA (10 m + 10 m chain)
	712A0103	Motor support bracket kit for X - XA - XT - XTA
	712A0101	Chain transmission return kit (for door of H = 5.5 m to 8.5 m)
	712A0121	Complete unlocking lock handle and metal cable 7 m
	712A0131	Hanging unlocking system about 7 m
	714A0383	433.92 MHz radio frequency card - DOES NOT manage Rolling Codes - SUITABLE for use with automations that integrate Rolling Code on board
	714A0339	TOP PLUS COLOR PACK Pack of no. 6 x 4-channel double frequency transmitters (433.92 / 868.35 MHz) fixed code - colored.
	714A0351	Pair of safety photocells - 10 m (cables not provided)
	714A0423	GO LIGHT K flashing light, for side motors model: X - XA - XT - XTA, complete with 230 V support
	714A0417	GO LIGHT K flashing light, for drive motors model: 100/120XA, complete with support 24 V
	714A1603	433.92 MHz outdoor aerial, can be combined with GO LIGHT K, complete with RG58 cable - 10 m.
	714A0412	GO LIGHT PLUS Amber flashing light
	714A0413	GO LIGHT PLUS Blue flashing light
	714A1604	433.92 MHz outdoor aerial, can be combined with GO LIGHT PLUS, complete with RG58 cable - 10 m.
	714A0347	GO-SELECT PLUS Wire keyboard selector, complete with control card - external wall mounting
	714A0312	433.92 MHz / Rolling code dual channel multiuser receiver
	714A0344	GO-KEY PLUS Wire key selector with DIN cylinder with blue backlight - external wall mounting
	714A0345	GO-KEY PLUS Wire key selector with DIN cylinder with blue backlight - recessed mounting
	714A0343	GO-SELECT PLUS/AIR 433.92 MHz radio keyboard selector with blue backlight - external wall mounting



**DATA FOR
SCENARIO AND
PANORAMIC**

SCENARIO

IN-DEPTH INFORMATION
The fully glazed aluminium sectional door



GLASS AND MESH FILLER



Clear



Satin



Opal



Mesh micro-perforated



Expanded metal mesh



Wire mesh



Alu + MDF Panels

COLOUR / FINISHES OF ALUMINIUM PROFILES



Aluminium Anodised



White 9016



Black 9005



1013



7035



7040



9002



9006



6005



3003



6009



5010



8014



7016



Golden Oak



Dark Oak



Anthracite



Other Colours Available

TECHNICAL SPECIFICATIONS

The SCENARIO front is made using robust aluminium profiles.

The profiles on the SCENARIO section(s) are powder-coated to match the surface or sublimated where paired with GOLDEN OAK or DARK OAK panels. The male and female profiles faithfully replicate the pinch-resistant profile on the insulated steel panels. Threaded inserts and metric screws are used to fix all parts so as not to compromise the excellent seal, even after making numerous adjustments.

FILLER SPECIFICATIONS

Acrylic single-wall
Acrylic single-wall sheet, 3 mm thick. It is fixed to the aluminium section using glazed beads fixed from the inside.

Polycarbonate single-wall
Polycarbonate single-wall sheet, 3 mm thick. It is fixed to the aluminium section using glazed beads fixed from the inside.

Acrylic double-glazing
Double-glazing composed of a double layer of acrylic, 3 mm thick, separated by a 12 mm aluminium frame and sealed around the edges, giving a total thickness of 18 mm. It is fixed to the aluminium section using glazed beads fixed from the inside.

Polycarbonate double-glazing
Double-glazing composed of a double layer of polycarbonate, 3 mm thick, separated by a 12 mm aluminium frame and sealed around the edges, giving a total thickness of 18 mm. It is fixed to the aluminium section using glazed beads fixed from the inside.

Expanded metal mesh / rhomboidal
Expanded metal mesh, 43x10 mm, 1.5 mm thick, with an open area of 67%. The mesh is made from galvanised steel which is then powder-coated. It is fixed to the aluminium section using glazed beads fixed from the inside.

Micro-perforated sheet metal
Micro-perforated sheet metal with 6 mm Ø holes and 9 mm pitch with an open area of 40%. The sheet metal is made from galvanised steel which is then powder-coated. It is fixed to the aluminium section using glazed beads fixed from the inside.

MDF insulated panel
Insulated 20 mm thick panel. The panel is composed of a 12 mm polystyrene core to which 4 mm MDF panels are applied. Aluminium sheet metal which can be painted is then applied to these. It is fixed to the aluminium section using glazed beads fixed from the inside.

Expanded sheet metal FILS/21
Expanded sheet metal with a mesh pattern that adapts to suit unique architectural surroundings, and those that require limited visibility inside, as the open area is just 30%. The sheet metal is made from aluminium which is then powder-coated. It is fixed to the aluminium section using glazed beads fixed from the inside.

PROFILES




* STANDARD MALE PROFILE
pinch-resistant aluminium male profile



* REINFORCED MALE PROFILE
pinch-resistant aluminium male profile with reinforcement

ALUMINIUM SECTIONS 40 MM THICK

Mirror divisions and panel reinforcements

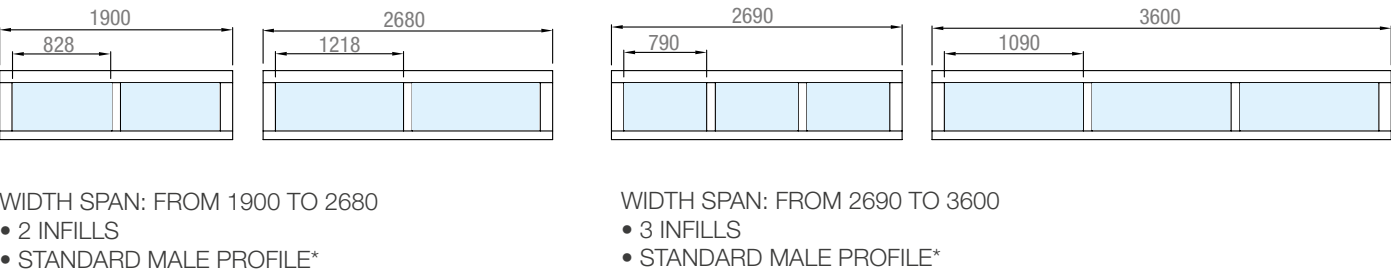

PANORAMIC

IN-DEPTH INFORMATION
The aluminium sectional door with no central pillar



GLASS AND MESH FILLER



Clear



Grained



Opal



Mesh micro-perforated



Expanded metal mesh



Wire mesh

COLOUR / FINISHES OF ALUMINIUM PROFILES



Aluminium Anodised



White 9016



Black 9005



1013



7035



7040



9002



9006



6005



3003



6009



5010



8014



7016



Golden Oak



Dark Oak



Anthracite



Other Colours Available

TECHNICAL SPECIFICATIONS

The PANORAMIC front is made using robust aluminium profiles.

The profiles on the PANORAMIC section(s) are powder-coated to match the surface or sublimated where paired with GOLDEN OAK or DARK OAK panels. The male and female profiles faithfully replicate the pinch-resistant profile

on the insulated steel panels. Threaded inserts and metric screws are used to fix all parts so as not to compromise the excellent seal, even after making numerous adjustments.

FILLER SPECIFICATIONS

Acrylic single-wall
Acrylic single-wall sheet, 3 mm thick. It is fixed to the aluminium section using glazed beads fixed from the inside.

Polycarbonate single-wall
Polycarbonate single-wall sheet, 3 mm thick. It is fixed to the aluminium section using glazed beads fixed from the inside.

MDF insulated panel
Insulated 20 mm thick panel. The panel is composed of a 12 mm polystyrene core to which 4 mm MDF panels are applied. Aluminium sheet metal which can be painted is then applied to these. It is fixed to the aluminium section using glazed beads fixed from the inside.

PROFILES




* STANDARD MALE PROFILE
pinch-resistant aluminium male profile




* REINFORCED MALE PROFILE
pinch-resistant aluminium male profile with reinforcement

ALUMINIUM SECTIONS 40 MM THICK
Mirror divisions and panel reinforcements

CONFIGURATION EXAMPLES W=3150



PANORAMIC FEASIBILITY DIAGRAM

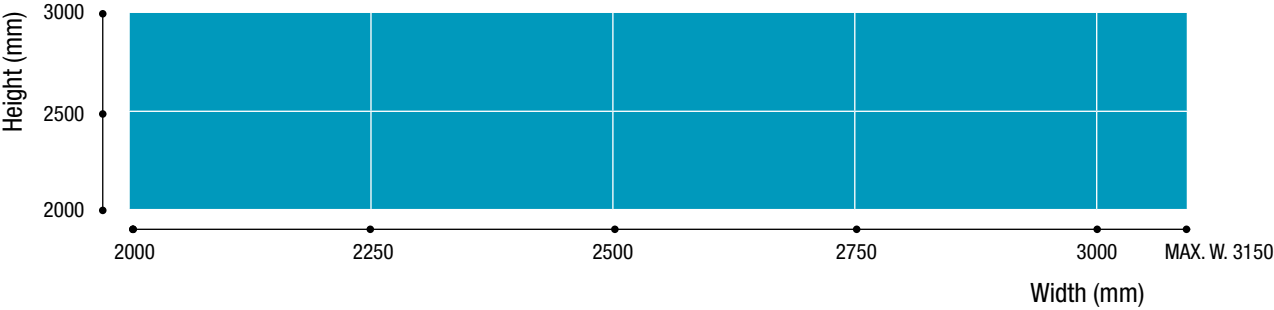

CODE	GO-VISION
02110801	Surcharge for Go-Vision / Panoramic section without reinforcement in Similar Ral STD GO
02110803	Surcharge for Go-Vision / Panoramic section without reinforcement in Similar Ral colours (check feasibility)
02110805	Surcharge for Go-Vision / Panoramic section without reinforcement in Similar Wood sublimated
02110807	Surcharge for Go-Vision section with oxidized reinforcement

CODE	SINGLE WALL FILLERS
11110011TG	Go-Vision single wall filler - 3 mm thick, clear acrylic
11110111TG	Go-Vision single wall filler - 3 mm thick, clear polycarbonate
11110013TG	Go-Vision single wall filler - 3 mm thick, satin acrylic

CODE	BLIND PANEL FILLERS
11110002VV	Go-Vision filler with insulating panel 20 mm thick - Similar Ral paint






**OTHER
ACCESSORIES
FOR RESIDENTIAL
AND INDUSTRIAL
SECTIONAL
DOORS**

GO-WIRELESS PLUS is the first fully wireless safety kit!

- No masonry work is required to lay cables from the peripherals to the control unit
- Long-life battery system (*according to usage conditions) with charge signalling device
- Install in minutes thanks to the self-learning system.

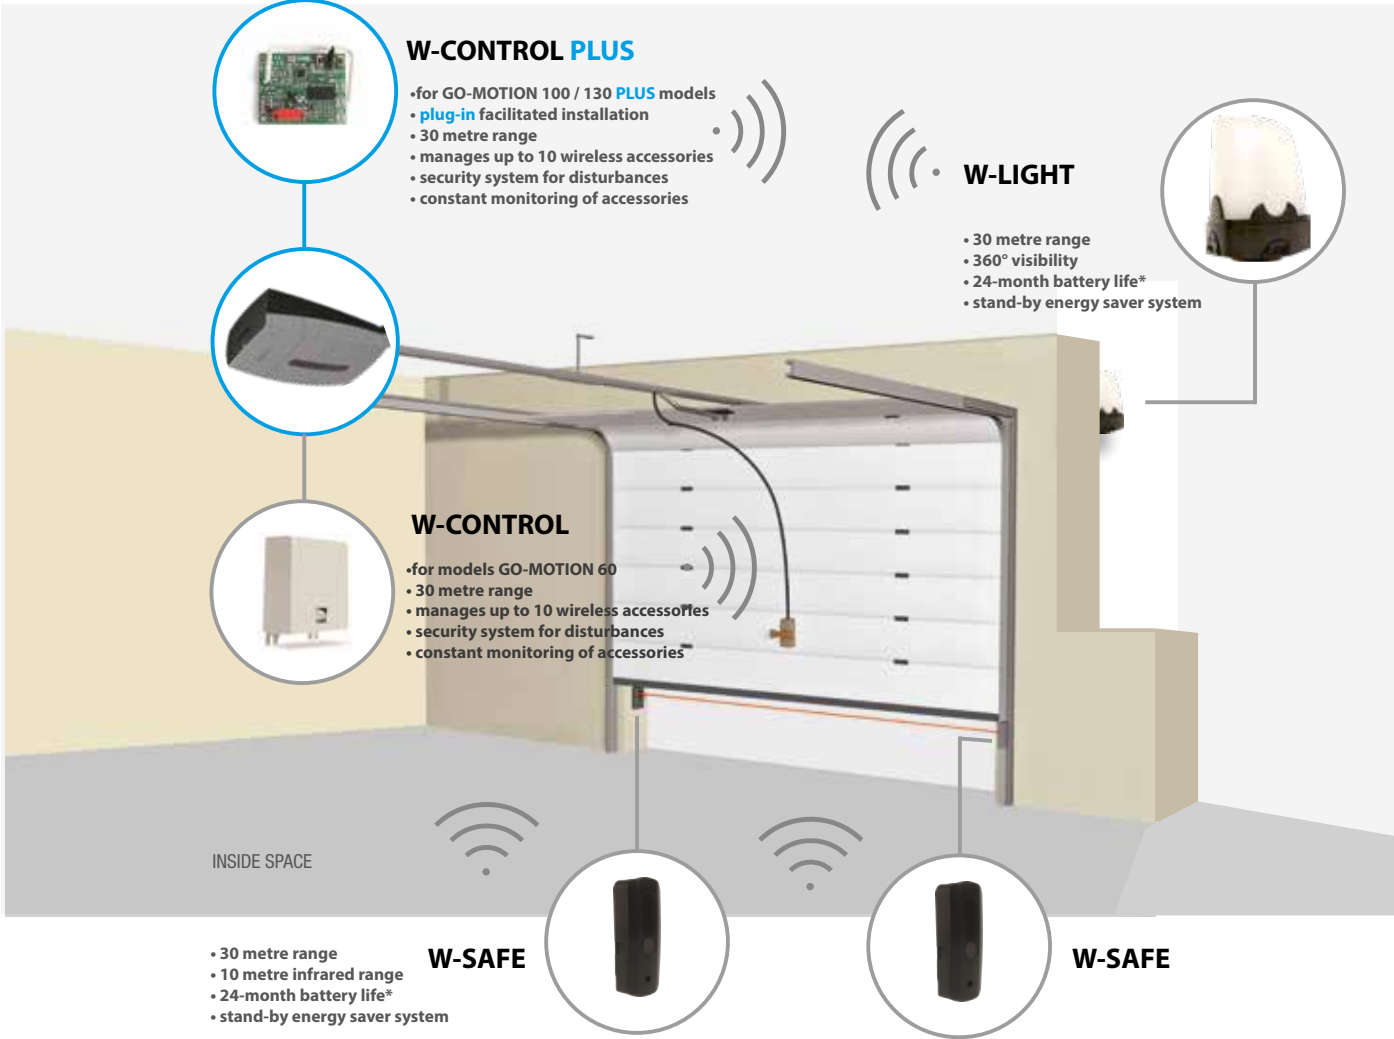

PRODUCT	CODE	GENERIC ACCESSORIES
	714A9355	GO-WIRELESS PLUS KIT includes: W-CONTROL PLUS board + W-LIGHT flashing light + W-SAFE couple (for GO-MOTION PLUS 100 and 130 automations)
	714A9312	GO-WIRELESS KIT includes: W-CONTROL control unit + W-LIGHT flashing light + W-SAFE couple (for all the GO-MOTION automations)
	714A0316	W-CONTROL PLUS Plug-in receiving board (for GO-MOTION PLUS 100 and 130 automations)
	714A9301.01	W-CONTROL wireless control unit, powered by operator
	714A9312	W-LIGHT wireless flashing LED, batteries included, complete with support
	714A9305.01	W-SAFE Pair of wireless infrared photocells, batteries included



Do you have an integrated pass door? GO-WIRELESS has the accessory you need! W-SWITCH

- Controls and guarantees effective closure for your pass door with a sound signal

- Long-life battery system (*according to usage conditions) with charge signalling device
- Install in minutes thanks to the self-learning system.



W-SWITCH

- W-SWITCH allows you to ensure that the pedestrian door closes correctly, and prevents the operator from moving where it is opened accidentally.
- Transmitter module with quick and intuitive programming

- Connects the safety micro-switch on the pass door to the W-CONTROL control unit
- Interrupts or prevents the sectional door from opening where the pass door is closed incorrectly

PRODUCT	CODE	GENERIC ACCESSORIES
	714A9302.01	W-SWITCH wireless transmitter with micro-switch

NO-TOUCH SAFETY KIT
OPTIONAL OPERATOR ACCESSORIES



PRODUCT	CODE	GENERIC ACCESSORIES
	71910001	No-Touch safety kit - Complete with control board
	71910003	No-Touch safety kit - Wireless - Complete with control board

CODE	MARANTEC OPERATORS
711M0004.01	Marantec drive motor kit COMFORT 270 - BI-LINKED 230V - 750N complete with belt track + receiver + 1 remote control with 4 channels
711M0005.01	Marantec drive motor kit COMFORT 280 - BI-LINKED 230V - 1000N complete with belt track + receiver + 1 remote control with 4 channels
711M0006.01	Marantec drive motor kit COMFORT 380 - BI-LINKED 230V - 1100N complete with belt track + receiver + 1 remote control with 4 channels

OTHER OPERATORS AVAILABLE
OPTIONAL

CODE	MARANTEC OPERATORS ACCESSORIES
714M0015	Pair of SPECIAL 630 IP 65 photocells
02150124	Pre-wired Marantec photocells system, complete with fastons and clips - H=2400 mm
02150127	Pre-wired Marantec photocells system, complete with fastons and clips - H=2700 mm
02150130	Pre-wired Marantec photocells system, complete with fastons and clips - H=3000 mm
714M0030	2-channel radio control DIGITAL 572 BI-LINKED unidirectional - 868 MHz Rolling Code
714M0034	DIGITAL 323 MULTIBIT 868 MHz remote control for car cigarette lighter
714M0035	COMMAND 131 868 MHz wall remote control with 2 channels
714M0022	24V LED flashing light, yellow
714M0031	DIGITAL 343 RECEIVER 868 MHz all-purpose receiver with 2 channels, IP 20
714M0032	DIGITAL 344 RECEIVER 868 MHz all-purpose receiver with 2 channels, IP 65
714M0036	COMMAND 231 868 MHz digital switch with 4 channels
714M0056	COMMAND 414 external selector with key
714M0491	Temporary battery for Marantec COMFORT 380 drive motor
714M0024	Emergency unblocking mechanism with metal cord L=1700
714M0961	PVC set for fitting to SZ/SK drive track template
714M0962	PVC set extension for fitting to SZ/SK drive track template
714M0971	PVC clips for fitting cables to SZ/SK drive track

CODE	MARANTEC OPERATOR ACCESSORIES
712M0011	UP Marantec D XS.Base 1Hp motor kit – 230V, with: - chain winch installed (including 10 m chain) - control unit on the motor - pull quick release 30 cm - 1 m power cable - keypad complete with PLUG 7 cable bundle. - adapter for shaft ø 25.4 mm - fixtures OPERATOR ONLY AVAILABLE IN DEADMAN VERSION
712M0001	UP Marantec D XS.Plus1Hp motor kit – 230V, with: - chain winch installed (including 10 m chain) - pull quick release 30 cm - 1 m power cable - control unit - 6 metre cable set - adapter for shaft ø 25.4 mm - fixtures OPERATOR IN DEADMAN VERSION - SET-UP FOR SAFETY ACCESSORIES TO BE INSTALLED
712M0003	Marantec D XS.Plus 1Hp automatic motor kit – 230V, with: - chain winch installed (including 10 m chain) - pull quick release 30 cm - 1 m power cable - control unit - 6 metre cable set - adapter for shaft ø 25.4 mm - fixtures - flashing light - pair of photocells with 10 m cables - 2 remote controls 868 MHz - 8.2 k Ω jumper - Digital 168 receiver AUTOMATIC OPERATOR - INCLUDING SAFETY ACCESSORIES
024M0041	Motor UP Marantec STA1-10-24 SET 400 V3PM kit, with: - chain winch installed (including 6 m chain) - pull quick release 30 cm - 1 m power cable - control unit - 6 metre cable set - adapter for shaft ø 25,4 mm - fixtures OPERATOR IN DEADMAN VERSION - SET-UP FOR SAFETY ACCESSORIES TO BE INSTALLED
024M0051	STA1 400V automatic motor kit, with: - chain winch installed (including 6 m chain) - pull quick release 30 cm - 1 m power cable with industrial socket - control unit - 6 metre cable set - adapter for shaft ø 25,4 mm - fixtures - industrial flashing light - pair of photocells with 10 m cables - 2 4-channel remote controls 868 Mhz - 8,2 k Ω jumper - Digital 168 receiver AUTOMATIC OPERATOR - INCLUDING SAFETY ACCESSORIES

OPERATORS
LIST OF OPTIONALS
FOR DYNAMIC XS

CODE	USE	GENERIC ACCESSORIES MARANTEC
712A0101	DYNAMIC XS	Chain and pinion kit (for a door from 5,5 m to 8,5 m)
714M0015	DYNAMIC XS	Pair of Special 630 photocells, IP65, recessed mount, including 10 m cables
714M0020	DYNAMIC XS	Rapid manual unblocking system for outer use for DYNAMICS XS - cable L=5,00 m
714M0036	DYNAMIC XS	Command 231 digital selector, 868 MHz 3+1 channels
714M0091	DYNAMIC XS	Pair of Special 633 photocells, IP65, orientables
714M0201	DYNAMIC XS	Chain kit with cover casing rap. 1/1 side motors Marantec
714M0202	DYNAMIC XS	Chain kit with cover casing rap. 1/1,2 side motors Marantec
714M0451	DYNAMIC XS	Handheld for programmation and diagnostics with LCD display

OPERATORS
LIST OF OPTIONALS
FOR STA1


CODE	USE	GENERIC ACCESSORIES MARANTEC
024M0061	STA1	9 m cable extension kit x STA1 + chain winch with shaft 4001-8000 mm high
024M0062	STA1	11 m cable extension kit x STA1 + chain winch with shaft 8001-10000 mm high
024M0063	STA1	15 m cable extension kit x STA1+ chain winch with shaft 10001-14000 mm high
714M0015	STA1	Pair of Special 630 photocells, IP65, recessed mount, including 10 m cables
714M0023	STA1	Industrial Flashing Light 230V, yellow light, intermittent board
714M0033.01	STA1	Digital 384 4-channel remote control - 868.3 MHz Marantec
714M0036	STA1	Command 231 digital selector, 868 MHz 3+1 channels
714M0091	STA1	Pair of Special 633 photocells, IP65, orientables
714M0108	STA1	Digital 168 receiver antenna 868MHz, IP00
714M0113	STA1	Emergency chain winch for side motors Marantec
714M0114	STA1	False ring for safety chain winch for side motors Marantec
714M0452	STA1	Handheld for programmation and diagnostics with LCD display for STA1



GOBLÓ: The new rectangular porthole with aluminium profiles.

- Light, safe and robust, thanks to its innovative construction in aluminium.
- In the standard model, it is interchangeable with other models on sale globally.

- Elegant design that can be perfectly adapted to all panels and surfaces.
- Its unique design makes it easy to assemble and disassemble where necessary, for example when replacing the double glazing.

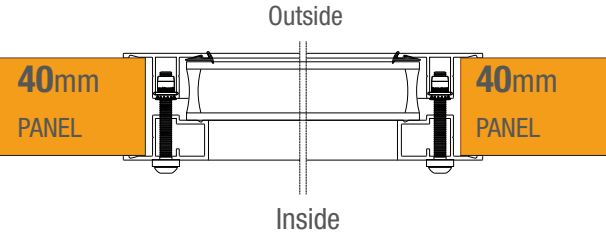

STANDARD SIZE 495 x 330 mm



CODE	GOBLÓ 495 x 330
CFG.48101531VN	Aluminium Gobló 495X330 Acrylic double-glazing with double chamber - clear/clear - Similar-RAL 9005/Ral9016
CFG.48101531VB	Aluminium Gobló 495X330 Acrylic double-glazing with double chamber - clear/clear - Similar-RAL 9016/RAL 9016
CFG.48101531VV	Aluminium Gobló 495X330 Acrylic double-glazing with double chamber - clear/clear - Similar-RAL.../RAL 9016
CFG.48101531AS	Aluminium Gobló 495X330 Acrylic double-glazing with double chamber - clear/clear - Anodised/RAL 9016
CFG.48101531KG	Aluminium Gobló 495X330 Acrylic double-glazing with double chamber - clear/clear - Golden Oak/RAL 9016
CFG.48101531KD	Aluminium Gobló 495X330 Acrylic double-glazing with double chamber - clear/clear - Dark Oak/RAL 9016
CFG.48101530VN	Aluminium Gobló 495X330 Acrylic double-glazing with double chamber - clear/milled - Similar-RAL 9005/Ral9016
CFG.48101530VB	Aluminium Gobló 495X330 Acrylic double-glazing with double chamber - clear/milled - Similar-RAL 9016/Ral9016
CFG.48101530VV	Aluminium Gobló 495X330 Acrylic double-glazing with double chamber - clear/milled - Similar-RAL.../RAL 9016
CFG.48101530AS	Aluminium Gobló 495X330 Acrylic double-glazing with double chamber - clear/milled - Anodised/RAL 9016
CFG.48101530KG	Aluminium Gobló 495X330 Acrylic double-glazing with double chamber - clear/milled - Golden Oak/RAL 9016
CFG.48101530KD	Aluminium Gobló 495X330 Acrylic double-glazing with double chamber - clear/milled - Dark Oak/RAL 9016

NOTE: the articles identified with “CFG” prefix cannot be supplied as single unit/separate position



OTHER STANDARD SIZES AVAILABLE



330 x 330



495 x 200

CODE	GOBLÓ 330 x 330
------	-----------------

CFG.48101331VN	Aluminium Goblò 330X330 Acrylic double-glazing with double chamber - clear/clear - Similar-RAL 9005/Ral9016
CFG.48101331VB	Aluminium Goblò 330X330 Acrylic double-glazing with double chamber - clear/clear - Similar-RAL 9016/RAL 9016
CFG.48101331VV	Aluminium Goblò 330X330 Acrylic double-glazing with double chamber - clear/clear - Similar-RAL.../RAL 9016
CFG.48101331AS	Aluminium Goblò 330X330 Acrylic double-glazing with double chamber - clear/clear - Anodised/RAL 9016
CFG.48101331KG	Aluminium Goblò 330X330 Acrylic double-glazing with double chamber - clear/clear - Golden Oak/RAL 9016
CFG.48101331KD	Aluminium Goblò 330X330 Acrylic double-glazing with double chamber - clear/clear - Dark Oak/RAL 9016

CFG.48101330VN	Aluminium Goblò 330X330 Acrylic double-glazing with double chamber - clear/milled - Similar-RAL 9016/Ral9005
CFG.48101330VB	Aluminium Goblò 330X330 Acrylic double-glazing with double chamber - clear/milled - Similar-RAL 9016/Ral9016
CFG.48101330VV	Aluminium Goblò 330X330 Acrylic double-glazing with double chamber - clear/milled - Similar-RAL.../RAL 9016
CFG.48101330AS	Aluminium Goblò 330X330 Acrylic double-glazing with double chamber - clear/milled - Anodised/RAL 9016
CFG.48101330KG	Aluminium Goblò 330X330 Acrylic double-glazing with double chamber - clear/milled - Golden Oak/RAL 9016
CFG.48101330KD	Aluminium Goblò 330X330 Acrylic double-glazing with double chamber - clear/milled - Dark Oak/RAL 9016

CODE	GOBLÓ 495 x 200
------	-----------------

CFG.48101521VN	Aluminium Goblò 495X200 Acrylic double-glazing with double chamber - clear/clear - Similar-RAL 9005/Ral9016
CFG.48101521VB	Aluminium Goblò 495X200 Acrylic double-glazing with double chamber - clear/clear - Similar-RAL 9016/RAL 9016
CFG.48101521VV	Aluminium Goblò 495X200 Acrylic double-glazing with double chamber - clear/clear - Similar-RAL.../RAL 9016
CFG.48101521AS	Aluminium Goblò 495X200 Acrylic double-glazing with double chamber - clear/clear - Anodised/RAL 9016
CFG.48101521KG	Aluminium Goblò 495X200 Acrylic double-glazing with double chamber - clear/clear - Golden Oak/RAL 9016
CFG.48101521KD	Aluminium Goblò 495X200 Acrylic double-glazing with double chamber - clear/clear - Dark Oak/RAL 9016

CFG.48101520VN	Aluminium Goblò 495X200 Acrylic double-glazing with double chamber - clear/milled - Similar-RAL 9016/Ral9005
CFG.48101520VB	Aluminium Goblò 495X200 Acrylic double-glazing with double chamber - clear/milled - Similar-RAL 9016/Ral9016
CFG.48101520VV	Aluminium Goblò 495X200 Acrylic double-glazing with double chamber - clear/milled - Similar-RAL.../RAL 9016
CFG.48101520AS	Aluminium Goblò 495X200 Acrylic double-glazing with double chamber - clear/milled - Anodised/RAL 9016
CFG.48101520KG	Aluminium Goblò 495X200 Acrylic double-glazing with double chamber - clear/milled - Golden Oak/RAL 9016
CFG.48101520KD	Aluminium Goblò 495X200 Acrylic double-glazing with double chamber - clear/milled - Dark Oak/RAL 9016

NOTE: the articles identified with “CFG” prefix cannot be supplied as single unit/separate position



CODE	PVC PORTHOLE 531 x 364
------	------------------------

0218000101	PVC porthole 531x364 mm clear - white - integrated double-glazing
0218000120	PVC porthole 531x364 mm clear - black - integrated double-glazing
02180001VV	PVC porthole 531x364 mm clear - Similar-RAL - integrated double-glazing
02180001KG	PVC porthole 531x364 mm clear - Golden Oak - integrated double-glazing
02180001KD	PVC porthole 531x364 mm clear - Dark Oak - integrated double-glazing

0218000301	PVC porthole 531x364 mm clear/milled - white - integrated double-glazing
0218000320	PVC porthole 531x364 mm clear/milled - black - integrated double-glazing
02180003VV	PVC porthole 531x364 mm clear/milled - Similar-RAL - integrated double-glazing
02180003KG	PVC porthole 531x364 mm clear/milled - Golden Oak - integrated double-glazing
02180003KD	PVC porthole 531x364 mm clear/milled - Dark Oak - integrated double-glazing


CODE	PVC PORTHOLE 609 x 203
------	------------------------

0218062001	PVC porthole 609x203 mm clear - white - integrated double-glazing
0218062020	PVC porthole 609x203 mm clear - black - integrated double-glazing

CODE	PVC PORTHOLE 637 x 334
------	------------------------


0218063320	PVC porthole 637x334 mm clear - black - integrated double-glazing
------------	---

CODE	SQUARE TUBING SET
02160201	Set of galvanised square tubing 100x50, W.= 2250 mm, complete with brackets
02160202	Set of galvanised square tubing 100x50, W.= 2500 mm, complete with brackets
02160203	Set of galvanised square tubing 100x50, W.= 3000 mm, complete with brackets
02160204	Set of galvanised square tubing 100x50, W.= 4500 mm, complete with brackets
02160205	Set of galvanised square tubing 100x50, W.= 5000 mm, complete with brackets
02160206	Set of galvanised square tubing 100x50, W.= 6000 mm, complete with brackets
02160303	Set of galvanised square tubing 150x50, W.= 3000 mm, complete with brackets
02160306	Set of galvanised square tubing 150x50, W.= 6000 mm, complete with brackets
02160403	Surcharge for square tubing set customised cut.
02160402	Painting square tubing set in Similar-RAL colours
02142023	Surcharge for sample colour painting (non-std)

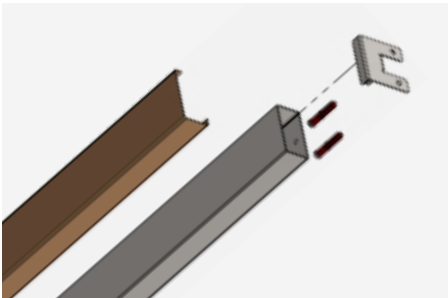


Square tubing set


CASING FOR TUBING
LIST OF OPTIONALS

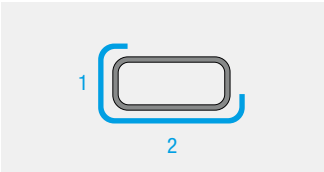


Casing on two sides for single tubing

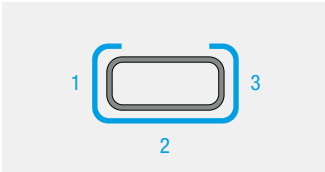

Casing on three sides for single tubing

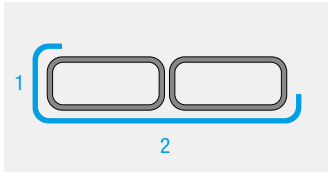


Casing on two sides for paired tubing

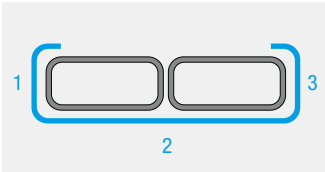


Casing on three sides for paired tubing

CODE	CASING FOR SQUARE TUBING
492A1005##	Casing on two sides for single square tubing set 100x50 in sheet metal, pre-painted in CAME GO STANDARD Similar-RAL colour *
492A1005##	Casing on two sides for single square tubing set 100x50 in film-coated sheet metal
492A1505##	Casing on two sides for single square tubing set 150x50 in sheet metal, pre-painted in CAME GO STANDARD Similar-RAL colour *
492A1505##	Casing on two sides for single square tubing set 150x50 in film-coated sheet metal
492B1005##	Casing on three sides for single square tubing set 100x50 in sheet metal, pre-painted in CAME GO STANDARD Similar-RAL colour *
492B1005##	Casing on three sides for single square tubing set 100x50 in film-coated sheet metal
492B1505##	Casing on three sides for single square tubing set 150x50 in sheet metal, pre-painted in CAME GO STANDARD Similar-RAL colour *
492B1505##	Casing on three sides for single square tubing set 150x50 in film-coated sheet metal
492D2005##	Casing on two sides for paired square tubing set 200x50 in sheet metal, pre-painted in CAME GO STANDARD Similar-RAL colour *
492D2005##	Casing on two sides for paired square tubing set 200x50 in film-coated sheet metal
492D3005##	Casing on two sides for paired square tubing set 300x50 in sheet metal, pre-painted in CAME GO STANDARD Similar-RAL colour *
492D3005##	Casing on two sides for paired square tubing set 300x50 in film-coated sheet metal
492C2005##	Casing on three sides for paired square tubing set 200x50 in sheet metal, pre-painted in CAME GO STANDARD Similar-RAL colour *
492C2005##	Casing on three sides for paired square tubing set 200x50 in film-coated sheet metal
492C3005##	Casing on three sides for paired square tubing set 300x50 in sheet metal, pre-painted in CAME GO STANDARD Similar-RAL colour *
492C3005##	Casing on three sides for paired square tubing set 300x50 in film-coated sheet metal
02160411	Surcharge (on Carter in RAL STD.) For painting 2 sides carter for tubular 100x50 - Similar-RAL colour
02160416	Surcharge (on Carter in RAL STD.) For painting 2 sides carter for tubular 150x50 - Similar-RAL colour
02160415	Surcharge (on Carter in RAL STD.) For painting 2 sides carter for tubular 200x50 - Similar-RAL colour
02160414	Surcharge (on Carter in RAL STD.) For painting 2 sides carter for tubular 300x50 - Similar-RAL colour
02160417	Surcharge (on Carter in RAL STD.) For painting 3 sides carter for tubular 100x50 - Similar-RAL colour
02160418	Surcharge (on Carter in RAL STD.) For painting 3 sides carter for tubular 150x50 - Similar-RAL colour
02160412	Surcharge (on Carter in RAL STD.) For painting 3 sides carter for tubular 200x50 - Similar-RAL colour
02160413	Surcharge (on Carter in RAL STD.) For painting 3 sides carter for tubular 300x50 - Similar-RAL colour


* excluding RAL 8014 and RAL 6009 (calculate surcharge for RAL painting)

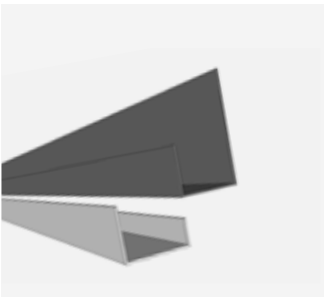

Jamb set

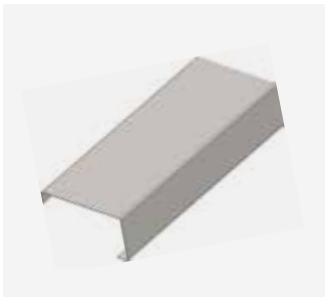

Casing acc. to drawing

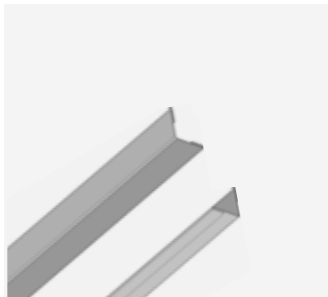


Angle bead casing

CODE	JAMB SET
02162252	Jamb set 95x50x20 W.= 2500 mm complete with Similar-RAL STD* casing
02162254	Jamb set 95x50x40 W.= 2500 mm complete with Similar-RAL STD* casing
02162256	Jamb set 95x50x60 W.= 2500 mm complete with Similar-RAL STD* casing
02162272	Jamb set 95x50x20 W.= 2750 mm complete with Similar-RAL STD* casing
02162274	Jamb set 95x50x40 W.= 2750 mm complete with Similar-RAL STD* casing
02162276	Jamb set 95x50x60 W.= 2750 mm complete with Similar-RAL STD* casing
02162322	Jamb set 95x50x20 W.= 3200 mm complete with Similar-RAL STD* casing
02162324	Jamb set 95x50x40 W.= 3200 mm complete with Similar-RAL STD* casing
02162326	Jamb set 95x50x60 W.= 3200 mm complete with Similar-RAL STD* casing
02162401	Surcharge for stile set casing
02164202	Surcharge for jamb set Similar RAL colour painting
02164203	Surcharge for stile set customised cut
02142023	Surcharge for sample colour painting (non-std)


CODE	CASING ACC. TO DRAWING
02141152	Casing acc. to drawing in pre-painted sheet metal, extension up to 200 mm. - available Similar-RAL*
02141162	Casing acc. to drawing in sublimated or sandgrain-finished sheet metal, extension up to 200 mm.
02141153	Casing acc. to drawing in pre-painted sheet metal, extension 200-300 mm. - available Similar-RAL*
02141163	Casing acc. to drawing in sublimated or sandgrain-finished sheet metal, extension 200-300 mm.
02141154	Casing acc. to drawing in pre-painted sheet metal, extension 300-400 mm. - available Similar-RAL*
02141155	Casing acc. to drawing in sublimated or sandgrain-finished sheet metal, extension 300-400 mm.
02141164	Casing acc. to drawing in pre-painted sheet metal, extension 400-500 mm. - available Similar-RAL*
02141165	Casing acc. to drawing in sublimated or sandgrain-finished sheet metal, extension 400-500 mm.
02141011	Overprice for aluminium and casing profiles painting, in similar RAL colour (RAL table).

CODE	ANGLE BEAD CASING
02141111	Angle bead casing 30x30 mm sheet metal pre-painted in available Similar-RAL colours* - inside/outside
02141112	Angle bead casing 30x30 mm imitation wood / sandgrain-finished sheet metal - inside/outside
02141119	Surcharge for painting 30x30 mm wire cover in RAL painted sheet
02511111	Wire cover 20x40 mm prepainted sheet metal available RAL
02511112	Wire cover 20x40 mm film-coated sheet metal Golden / Dark Oak
02511113	Wire cover 20x40 mm film-coated sheet metal Marezzato 7016
02511119	Surcharge for painting 20x40 mm wire cover in RAL painted sheet


* Similar RAL colours available : 9016/6005/9002/9006/7016 (excluding similar RAL 8014 and similar RAL 6009 to be considered as a surcharge for painting)

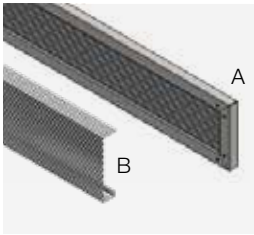

A - Grille header
B - Micro-perforated header

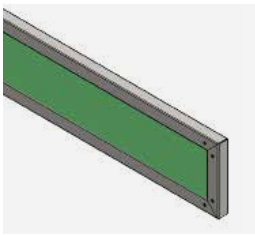

Header edged with pre-painted steel profiles
h = 150-520 mm

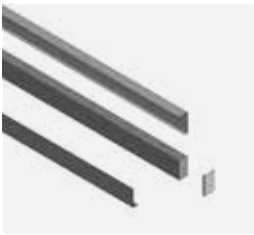

Sandwich header



Glazed header

CODE	MICRO-PERFORATED GRILLE HEADER / GRILLE HEADER
02142009	Header made from press-bent, micro-perforated sheet metal Ø 6 mm - painted in Similar Ral colours, h=100-330 mm *
02142001	Header in stretched sheet metal, steel prof edge, h=190-250 mm, painted *
02142002	Header in stretched sheet metal, steel prof edge, h=250-500 mm, painted *
02142023	Surcharge for sample paintwork colour (non-standard)

CODE	HEADER EDGED WITH STEEL PROFILES
02142011	Header edged with aluminium profiles - standard insulated panel
02142012	Header edged with aluminium profiles - smooth insulated panel
02142013	Header edged with aluminium profiles - film-coated insulated panel
02142021	Painting on header edged with aluminium profiles in CAME GO std Similar-RAL colours
02142022	Painting on header edged with aluminium profiles in Similar-RAL colours
02142023	Painting on header edged with aluminium profiles in sample colours
02142031	Surcharge for header edged with Similar-RAL painted profiles
02142032	Surcharge for header edged with Golden/Dark Oak sublimated profiles
02142023	Surcharge for sample colour painting (non-std)


CODE	SANDWICH HEADER
02142015	Sandwich header, 40 mm thick, press-bent sheet metal, available Similar-RAL colours, h=70-350 mm *
02142016	Sandwich header, 40 mm thick, press-bent sheet metal, painted in Similar-RAL, h=70-350 mm *
02142017	Sandwich header, 40 mm thick, press-bent sheet metal, Golden/Dark Oak, h=70-350 mm *
02142018	Sandwich header, 40 mm thick, press-bent sheet metal, Anthracite, h=70-350 mm *
02142023	Surcharge for sample colour painting (non-std)

CODE	GLAZED HEADER
1131VA11Y2	Header in aluminium profiles s/filler, sublimated / anodised (h200-750) *
1131VA11VC	Header in aluminium profiles s/filler, painted sample (h200-750) *
1131VA11Y1	Header in aluminium profiles s/filler, painted in Ral standard (h200-750) *

* Maximum length of the headers equal to W max = 6000 mm



Light track hanger set with triangular brackets

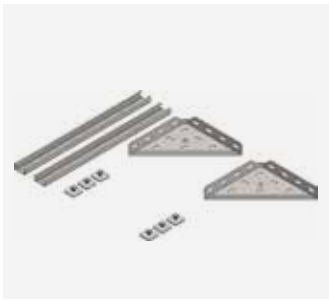

Heavy track hanger set with triangular brackets

CODE	LIGHT TRACK HANGERS
43220501ZN	Pair of track hangers W.=500 mm complete with triangular brackets 135x135 and screws - galvanised (up to 80kg per hanger)
43221001ZN	Pair of track hangers W.=1000 mm complete with triangular brackets 135x135 and screws - galvanised (up to 80kg per hanger)
43220501VB	Pair of track hangers W.=500 mm complete with triangular brackets 135x135 and screws - Similar-RAL 9016
43221001VB	Pair of track hangers W.=1000 mm complete with triangular brackets 135x135 and screws - Similar-RAL 9016

CODE	HEAVY TRACK HANGERS
43220500ZN	Pair of track hangers W.=500 mm complete with triangular brackets 225x225 and screws - galvanised (over 80kg per hanger)
43221000ZN	Pair of track hangers W.=1000 mm complete with triangular brackets 225x225 and screws - galvanised (over 80kg per hanger)
43222000ZN	Pair of track hangers W.=2000 mm complete with triangular brackets 225x225 and screws - galvanised
43222500ZN	Pair of track hangers W.=2500 mm complete with triangular brackets 225x225 and screws - galvanised
43220500VB	Pair of track hangers W.=500 mm complete with triangular brackets 225x225 and screws - Similar-RAL 9016
43221000VB	Pair of track hangers W.=1000 mm complete with triangular brackets 225x225 and screws - Similar-RAL 9016
43222000VB	Pair of track hangers W.=2000 mm complete with triangular brackets 225x225 and screws - Similar-RAL 9016
43222500VB	Pair of track hangers W.=2500 mm complete with triangular brackets 225x225 and screws - Similar-RAL 9016



Fitting with double track



Fitting with single track

CODE	CEILING FITTINGS
43220011ZN	Pair of Fitting L=230 for double track w/screws - galvanised
43220012ZN	Pair of Fitting L=350 for double track w/screws - galvanised
43220013ZN	Pair of Fitting L=500 for double track w/screws - galvanised
43220011VB	Pair of Fitting L=230 for double track w/screws - Simil RAL 9016
43220012VB	Pair of Fitting L=350 for double track w/screws - Simil RAL 9016
43220013VB	Pair of Fitting L=500 for double track w/screws - Simil RAL 9016
43220014ZN	Pair of Fitting L=230 for single track w/screws - galvanised
43220015ZN	Pair of Fitting L=350 for single track w/screws - galvanised
43220016ZN	Pair of Fitting L=500 for single track w/screws - galvanised
43220014VB	Pair of Fitting L=230 for single track w/screws - Simil RAL 9016
43220015VB	Pair of Fitting L=350 for single track w/screws - Simil RAL 9016
43220016VB	Pair of Fitting L=500 for single track w/screws - Simil RAL 9016

COLOUR

LIST OF OPTIONALS

CODE	COLOUR
02120901	Surcharge for painting tracks up to H=3250 mm - Similar Ral 9016
02120902	Surcharge for painting tracks over H=3250 mm - Similar Ral 9016
02140501	Painting form accessories in Similar Ral 9016
02140531	Surcharge for painting pair of side casings in Similar Ral

GENERIC VARIATIONS

LIST OF OPTIONALS

CODE	GENERIC VARIATIONS
02190002	Management of RESIDENTIAL garage door with width measurement lower than 1900mm (if technically possible)
02190003	Management of RESIDENTIAL garage door with height measurement lower than 1900mm (if technically possible)
02190013	Management of INDUSTRIAL door with width measurement lower than 2500 mm (if technically possible)
02190014	Management of INDUSTRIAL door with height measurement lower than 2500 mm (if technically possible)
02190005	Insertion of aluminium threshold on garage door without pedestrian door (if technically possible)
02190015	Life cycles of springs increased for INDUSTRIAL range
02190012	Life cycles of springs increased for RESIDENTIAL range
02190008	Surcharge for parameterization of GO-VISION sections
02190006	Surcharge for personalized insertion of Goblò and grids
0219A001	Surcharge for decentralization pedestrian door
02190011	Surcharge for pedestrian door working H < 2280
02190018	Reinforcement omega charge required for W < 5250mm (for single section)

LOCKS

LIST OF OPTIONALS

CODE	ACCESSORIES
02140206	Side-closing external lock ONLY FOR RESIDENTIAL DOORS WITHOUT OPERATORS (not available at present)
43354001	Security lock for sectional door mod. SAG 11AS
02140204	Side-closing bolt ONLY FOR DOORS WITHOUT OPERATORS

PROTECTIVE CASINGS

LIST OF OPTIONALS

CODE	ACCESSORIES
02510011	Casing covering spring-bearing shaft NF RAL9016
02510012	Casing covering spring-bearing shaft NR RAL9016



VENTILATION GRILLES

LIST OF OPTIONALS

CODE	VENTILATION GRILLES 300 x 100
02183010GR	Anodised aluminium ventilation grille 300x100 mm - anodised - integrated
02183010VB	Anodised aluminium ventilation grille 300x100 mm - Similar-RAL 9016 - integrated
02183010VN	Anodised aluminium ventilation grille 300x100 mm - Similar-RAL 9005 - integrated
02183010VV	Anodised aluminium ventilation grille 300x100 mm - painted in Similar-RAL - integrated

CODE	VENTILATION GRILLES 400 x 200
02184020GR	Anodised aluminium ventilation grille 400x200 mm - anodised - integrated
02184020VB	Anodised aluminium ventilation grille 400x200 mm - Similar-RAL 9016 - integrated
02184020VN	Anodised aluminium ventilation grille 400x200 mm - Similar-RAL 9005 - integrated
02184020VV	Anodised aluminium ventilation grille 400x200 mm - painted in Similar-RAL - integrated

CODE	VENTILATION GRILLES 500 x 200
02185020GR	Anodised aluminium ventilation grille 500x200 mm - anodised - integrated
02185020VB	Anodised aluminium ventilation grille 500x200 mm - Similar-RAL 9016 - integrated
02185020VN	Anodised aluminium ventilation grille 500x200 mm - Similar-RAL 9005 - integrated
02185020VV	Anodised aluminium ventilation grille 500x200 mm - painted in Similar-RAL - integrated

CODE	VENTILATION GRILLES 510 x 345 (only for CASSETTATO panels)
02185134GR	Aluminium ventilation grille 510x345 mm for Cassettato panel - anodised - integrated
02185134VB	Anodised aluminium ventilation grille 510x345 mm - Similar-RAL 9016 - integrated
02185134VN	Anodised aluminium ventilation grille 510x345 mm - Similar-RAL 9005 - integrated
02185134VV	Anodised aluminium ventilation grille 510x345 mm - painted in Similar-RAL - integrated



ANIMAL FLAPS

LIST OF OPTIONALS

CODE	ANIMAL FLAPS
0218900501	PVC access for pets - White - Measurements: w. = 148 x H. = 145
02189005VV	PVC access for pets - Similar-RAL - Measurements: w. = 148 x H. = 145
0218901101	PVC access for pets - White - Measurements: w. = 218 x H. = 255
02189011VV	PVC access for pets - Similar-RAL - Measurements: w. = 218 x H. = 255



Example of side door



Side door with panic bar



Specific accessories range

W. opening: MIN 700 mm / MAX 1400 mm
H. opening: MIN 1900 mm / MAX 2600 mm

CODE	SIDE DOOR
11120001	Side pedestrian door complete with: 1-point closure lock - handle - door profiles in Similar Ral white 9016 or black 9005 colours
43340010	Glide door closer

Range of dimensions of standard GO EXIT door, without surcharge:

W. opening MIN=700 MAX=1350

H. opening MIN=1900 MAX= 2200 **

W passage = W. opening - 151 mm (except for assembly beyond internal opening)

H passage = H. opening - 76 mm (except for assembly beyond internal opening)

Note:
Aluminum profile thickness GO EXIT 52 mm
Panel thickness GO EXIT 40 mm

CODE	SIDE DOOR OPTIONAL ACCESSORIES
02170013	Surcharge for complete lock - GO-EXIT door - 3-pt closure
02170021	Surcharge for anti-panic handle and external control - GO-EXIT door - 1-pt closure
02170023	Surcharge for anti-panic handle and external control - GO-EXIT door - 3-pt closure
02170001	Surcharge for Push-Pad and external control - GO-EXIT door - 1-pt closure
02170003	Surcharge for Push-Pad and external control - GO-EXIT door - 3-pt closure
02170043	Sublimation of GO-EXIT profiles - Golden/Dark Oak for wood-like profiles
02170041	Anodisation of GO-EXIT profiles - natural for the GOBLO silver color
02170040	Painting of GO-EXIT profiles - Ral table
02170044	Painting of GO-EXIT profiles - sample colours
02170042	Surcharge for painting GO-EXIT panels in standard Ral colours
0213VRFS	Surcharge for painting (doors) in non-standard Ral colours
0213VCMP	Surcharge for painting (doors) in non-standard sample colours
02170031	Surcharge for glazed section in aluminium Vision GO-EXIT door - painted in Ral/sample
02170032	Surcharge for glazed section in aluminium GO-EXIT door - sublimated in Golden/Dark Oak
02170033	Surcharge for glazed section in aluminium GO-EXIT door - natural anodised
02190201	Surcharge for management of GO-EXIT door - non-standard measurements (1350 < W. opening <=1500 or 2200 < H. opening <= 2600)



Surcharge for Goblo/porthole/grill: refer to sectional doors list.

Surcharge for unforeseen alignment of GG-EXIT panels side-by-side with sectional doors, but this needs technical feasibility check. Excluding Cassettato version.



**For greater heights of the opening, use additional filler header above the door (fanlight)





EXTERNAL FLUSH ASSEMBLY
OPENING INWARDS RHS

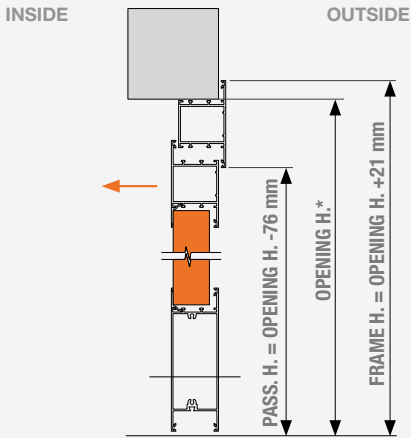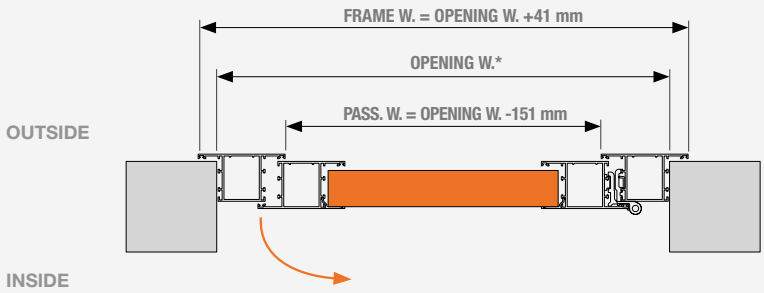



EXTERNAL FLUSH ASSEMBLY
OPENING OUTWARDS RHS

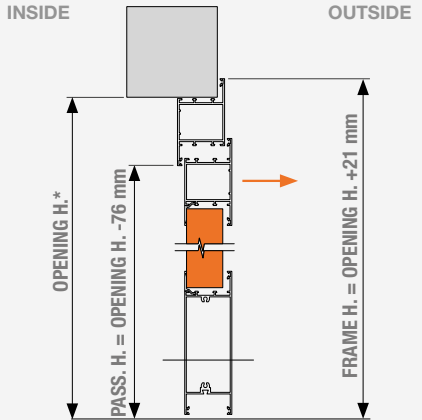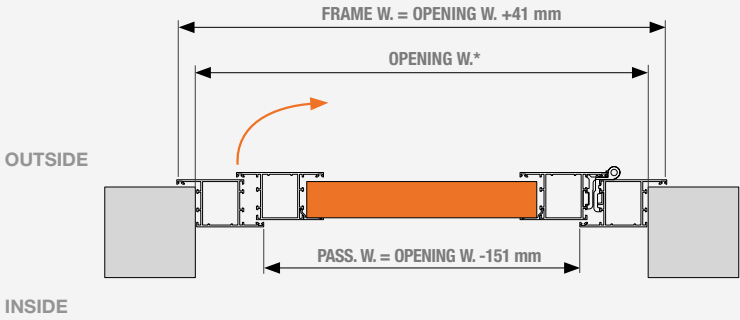



ASSEMBLY IN THE OPENING
OPENING INWARDS RHS

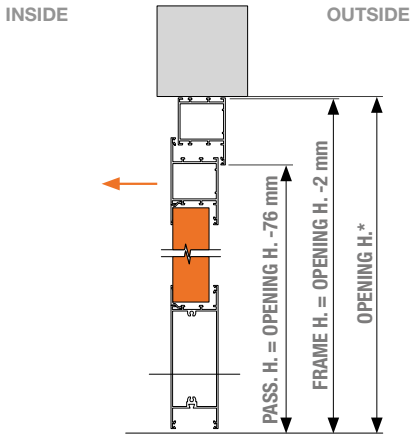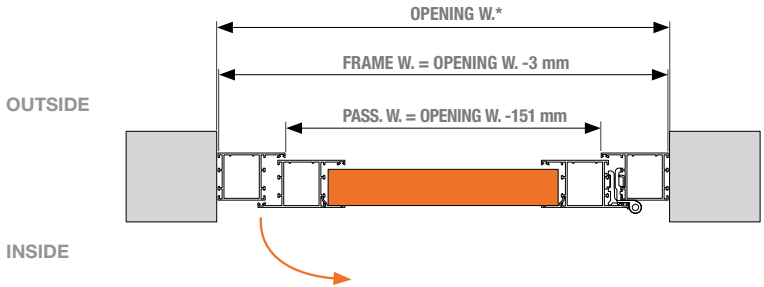



ASSEMBLY IN THE OPENING
OPENING OUTWARDS RHS

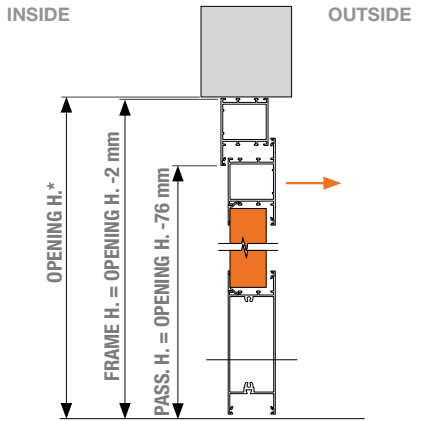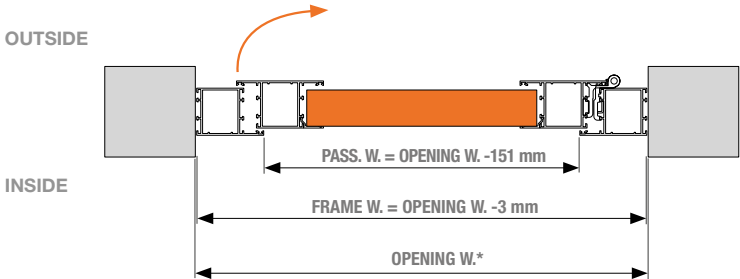



INTERNAL FLUSH ASSEMBLY
OPENING INWARDS RHS

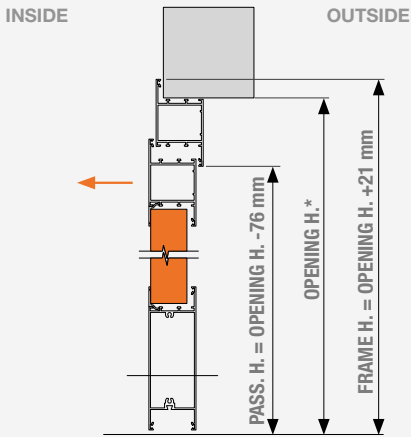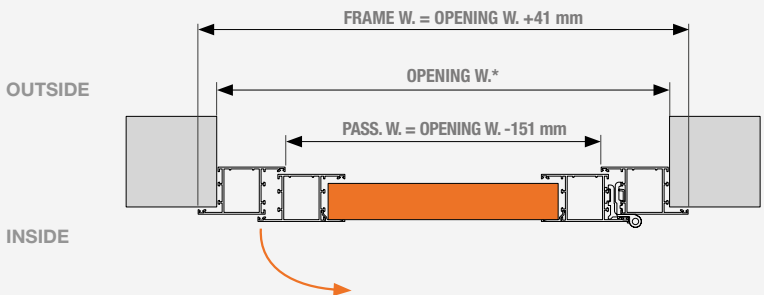



INTERNAL FLUSH ASSEMBLY
OPENING OUTWARDS RHS

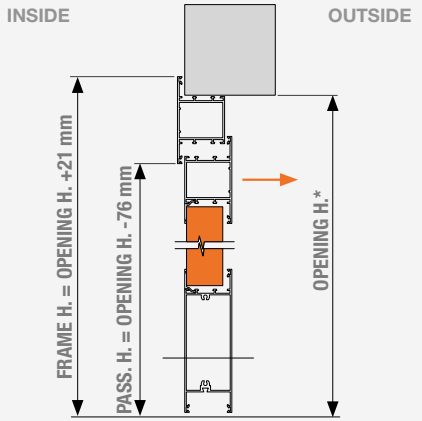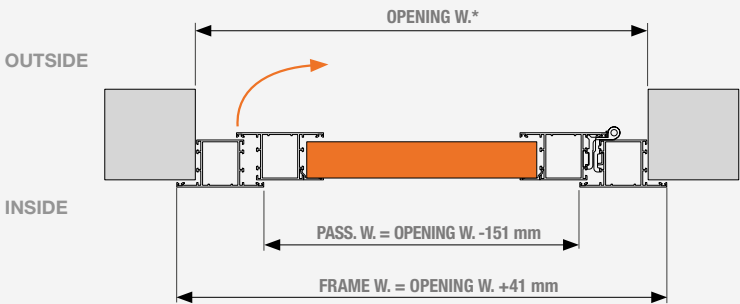

INTERNAL ASSEMBLY OUTSIDE THE OPENING
OPENING INWARDS RHS

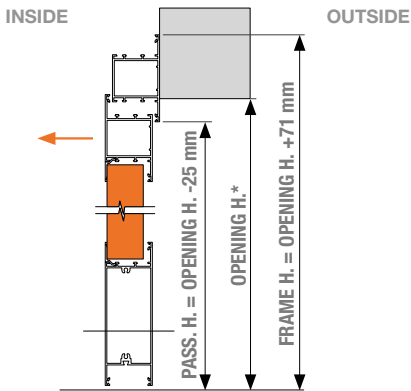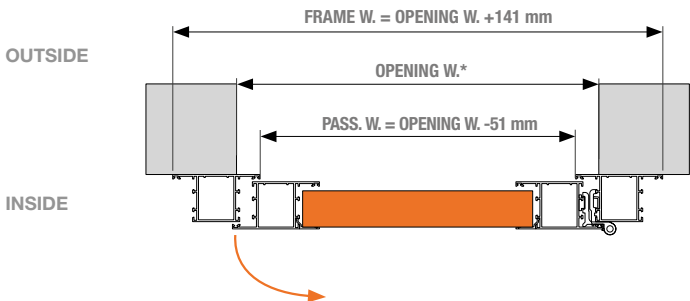

INTERNAL ASSEMBLY OUTSIDE THE OPENING
OPENING OUTWARDS RHS

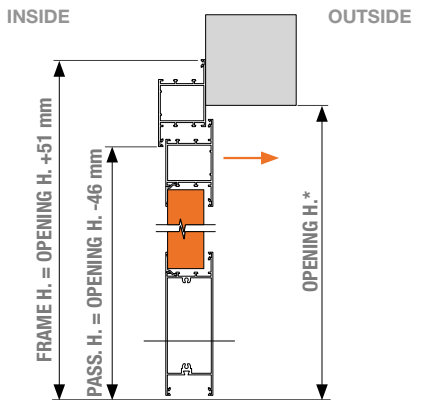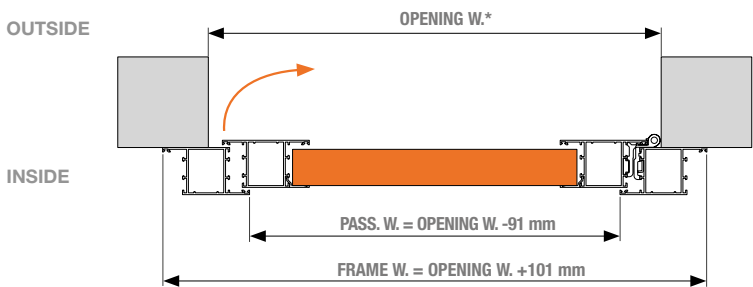

* OPENING H. and OPENING W. are the measurements you need to communicate to proceed with the order.

Note: the wind-break is always positioned facing the inside.

CAME GO STANDARD COLOUR RANGE

AVAILABLE PANEL
SUMMARY TABLE

SIMILAR RAL COLOUR		PANEL H (mm)	RIGATO			DOGATO		PIANO		CASSETTATO	MILLERIGHE
											
			EMBOSSING			EMBOSSING		EMBOSSING		EMBOSSING	EMBOSSING
			STUCCO	WOOD	SMOOTH	WOOD	SMOOTH	WOOD	SMOOTH	WOOD	/
PRE-PAINTED SHEET METAL											
RAL 9016		500	●	●	-	●	-	●	-	● REQ	-
		610	●	●	-	-	-	-	-	-	-
POLY 9016		500	-	-	●	-	●	-	●	-	-
		610	-	-	-	-	-	-	●	-	-
POLY 7016 PMD		500	-	-		-	● NEW	-	● NEW	-	-
		610	-	-	-	-	-	-	● NEW	-	-
7016 SANDGRAIN		500	-	-		-	● NEW	-	● NEW	-	-
		610	-	-	-	-	-	-	-	-	-
RAL 9002		500	●	-	-	-	-	-	-	-	-
		610	●	-	-	-	-	-	-	-	-
RAL 6005		500	-	-	-	● REQ	-	● REQ	-	● REQ	-
		610	-	-	-	-	-	-	-	-	-
RAL 8014		500	-	-	-	●	-	-	-	-	-
		610	-	-	-	-	-	-	-	-	-
RAL 9006		500	●	-	-	-	-	-	-	-	●
		610	●	-	-	-	-	-	-	-	●
V-GOLDEN		500	-	-	-	-	●	-	●	-	-
		610	-	-	-	-	-	-	-	-	-
V-DARK		500	-	-	-	-	●	-	●	-	-
		610	-	-	-	-	-	-	-	-	-
PLASTIC-COATED SHEET METAL											
GOLDEN OAK		500	-	-	-	-	●	●	●	● REQ	-
		610	-	-	-	-	-	-	-	-	-
DARK OAK		500	-	-	-	-	●	●	●	● REQ	-
		610	-	-	-	-	-	-	-	-	-

● = available ● NEW = new available ● REQ = available on demand* - = not available

Note: The long-lasting surface coating on the POLYGRAIN panels (White similar RAL 9016 and Anthracite similar RAL 7016) has a shimmering finish, which changes depending on the angle you look at it from and the light shining on it. The colour is not uniform as on other types of panel. Therefore, any subtle or more significant shades and tones should not be considered a defect on the panel, rather an integral part of its finish.

Note: The elements related to the SANDGRAIN panel (anthracite SIMIL RAL 7016) will be exclusively supplied in SIMIL RAL 9005




Note: CAME GO uses the SIMILAR RAL colour range. The SIMILAR RAL colour tones in the catalogue and other CAME GO documents and promotional material are approximate and should be considered as an indication of the colour shade. The finished product colour may differ in tone, shade and brightness with respect to the SIMILAR RAL sample.

Note * : Available on demand. Please contact the sales department.

ADDITIONAL COLOUR RANGE



CAME GO SELECTION

PAINTING ON WHITE PANEL

SIMILAR RAL COLOUR		PIANO		DOGATO		RIGATO		CASSETTATO  REQ	
									
		SMOOTH	WOOD	SMOOTH	WOOD	STUCCO	WOOD	SMOOTH	WOOD
	RAL 1013								
	RAL 7035								
	RAL 7040								
	RAL 9002					-			
	RAL 9006					-			
	RAL 6005		-		-				-
	RAL 3003								
	RAL 6009								
	RAL 5010								
	RAL 8014				-				
	RAL 7016								

ADDITIONAL SIMILAR RAL
COLOUR TABLE

PAINTING ON WHITE PANEL

SIMILAR RAL COLOUR		PIANO		DOGATO		RIGATO		CASSETTATO 	
									
		SMOOTH	WOOD	SMOOTH	WOOD	STUCCO	WOOD	SMOOTH	WOOD
									

SAMPLE COLOUR
PAINTWORK

Note: The long-lasting surface coating on the POLYGRAIN panels (White similar RAL 9016 and Anthracite similar RAL 7016) has a shimmering finish, which changes depending on the angle you look at it from and the light shining on it. The colour is not uniform as on other types of panel. Therefore, any subtle or more significant shades and tones should not be considered a defect on the panel, rather an integral part of its finish.

Note: CAME GO uses the SIMILAR RAL colour range. The SIMILAR RAL colour tones in the catalogue and other CAME GO documents and promotional material are approximate and should be considered as an indication of the colour shade. The finished product colour may differ in tone, shade and brightness with respect to the SIMILAR RAL sample.

Nota: CAME GO non garantisce la perfetta tonalità cromatica nel caso di verniciatura tra diversi materiali/ supporti. Pertanto si consiglia di richiedere un campione di verniciatura a pagamento da riconsegnare controfirmato per accettazione. In caso contrario, non saranno accettate segnalazioni di non conformità in merito.

CAME  GO

1000 JOURNAL OF POST KEYNESIAN ECONOMICS

CAME GO S.R.L. A SOCIO UNICO

Zona Industriale Nord, settore D62
33097 Spilimbergo (PN) - ITALY
T. +39.0427.519011 - F. +39.0427.519099
go-italia.com - go@came.com

EUROPE**ITALY**

CAME S.p.A., Treviso
CAME Italia, Treviso
GO, Pordenone

BELGIUM

CAME Benelux, Lessines

CROATIA

CAME Adriatic, Kastav

FRANCE

CAME France, Paris
URBACO, Avignone

GERMANY

CAME Deutschland GmbH,
Stuttgart

IRELAND

CAME BPT Ireland, Dublin

NETHERLANDS

CAME Nederland, Breda

POLAND

CAME Poland, Warszawa

PORTUGAL

CAME Portugal, Lisbon

RUSSIA

CAME Rus, Moscow

SPAIN

CAME Spain, Madrid
PARKARE, Barcelona

UK

CAME United Kingdom,
Nottingham
CAME PARKARE UK, Bristol

ASIA**INDIA**

CAME India Automation
Solutions,
New Delhi

U.A.E.

CAME Gulf, Dubai

AMERICAS**BRAZIL**

CAME do Brasil Serviços de
Automação, São Paulo

CHILE

CAME PARKARE Chile, Santiago

MEXICO

CAME Automatismos de Mexico,
Mexico City
CAME PARKARE México,
México D.F.

PERÚ

CAME PARKARE Perú, Lima

USA

CAME Americas Automation,
Miami

AFRICA**SOUTH AFRICA**

CAME BPT South Africa,
Johannesburg



© 7319916E.03

YOU MAY NOT EVEN PARTIALLY REPRODUCE THIS DOCUMENT
CAME RESERVES THE RIGHT TO MAKE ANY CHANGES TO THIS DOCUMENT AT ANY TIME